


ULTIMEA

Poseidon M3T

User Manual

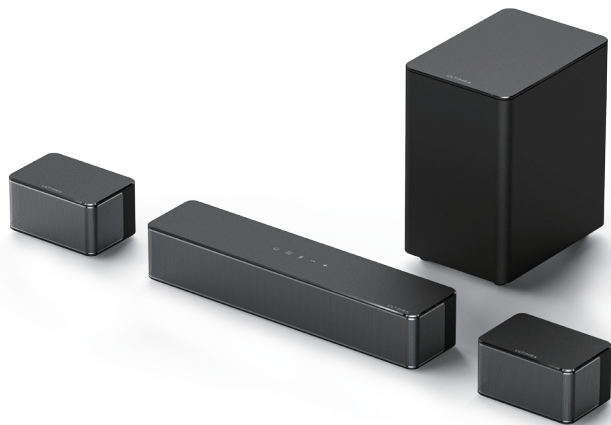

Model No.: U2502

Poseidon M3T 5.1 Channel Virtual Surround Soundbar

HDMI™

Bluetooth®

WE ARE READY TO HELP



support@ultimea.com

Prefer video tutorial?

Setup guidance video, USER MANUAL or Trouble Shooting on ULTIMEA website.



[@ultimea_official](https://www.instagram.com/ultimea_official)



support.ultimea.com




+1 888-598-8875 (US)

+49 89-628-25828 (EU)

Mon-Fri 9am-5pm (PST)

Mon-Fri 9am-5pm (CET)

1 ACCESSORIES LIST




Subwoofer




Soundbar




Surround Speaker × 2




Power Adaptor




Subwoofer Power Cable




Stereo 3.5mm to RCA Audio Cable



Stereo RCA to RCA Cable (6m)




HDMI Cable




Digital Optical Cable




Remote Control



Wall Mounted Kit



Wall Bracket








Mounting Screw on Speakers




User Manual








2 SOUNDBAR CONTROLS


Control Panel

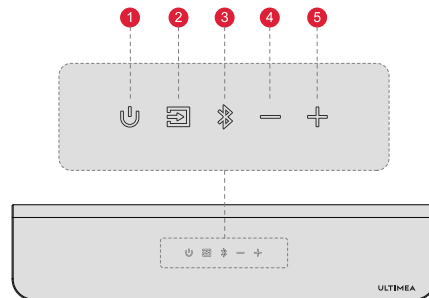







- 1 “”: **Power Button**
Press to power on / Hold for 3 seconds to power off.
- 2 “”: **Input Mode**
Press to switch channels: ARC-OPT(OPTICAL)-BT-AUX-USB.
- 3 “”: **Bluetooth**
Press to switch to BT channel and enter pairing mode. Hold for 3 seconds to disconnect current device and choose to connect to a new device manually on your mobile phone / PC / TV (BT ID: Poseidon M3T).
- 4 “”: **Volume Down**
- 5 “”: **Volume Up**




Remote Control

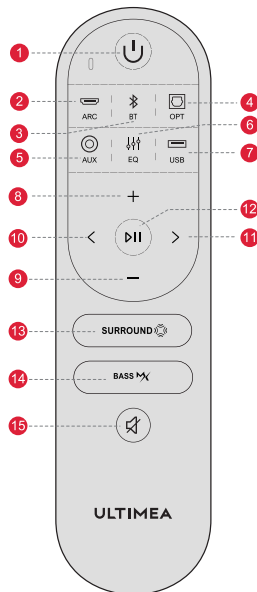- 1 “”: **Power Button**
Press to power on / Hold for 3 seconds to power off.
- 2 “”: **ARC**
Press to switch to HDMI ARC channel.
- 3 “”: **BT**
Press to switch to BT channel and enter pairing mode.
Hold for 3 seconds to disconnect current device and choose to connect to a new device manually on your mobile phone / PC / TV (BT ID: Poseidon M3T).
- 4 “”: **OPT**
Press to switch to OPTICAL channel.
- 5 “”: **AUX**
Press to switch to AUX channel.
- 6 “”: **EQ**
Press to switch among Movie, Dialogue, Music mode, the display will show: “EQ 1”, “EQ 2”, “EQ 3”.
- 7 “”: **USB**
Press to switch to USB channel.




- 8 “”: **Volume Up**
- 9 “”: **Volume Down**
- 10 “”: **Previous**
For BT and USB mode only:
Skip to previous track.
- 11 “”: **Next**
BT and USB mode: Skip to next track.
- 12 “”: **Play/ Pause**
For BT and USB mode only.
USB mode: Hold for 3 seconds to switch between single loop playback and list loop playback.
- 13 “”: **SURROUND**
Press to adjust surround sound level, the display will show: “SF-2”, “SF-1”, “SF 0”, “SF 1”, “SF 2”.
- 14 “”: **BASSMX™**
Press to adjust bass level, the display will show: “b5-2”, “b5-1”, “b5 0”, “b5 1”, “b5 2”.
- 15 “”: Mute / Recover the volume.

3 CONNECT TO TV VIA ARC




Steps 1:

Connect one end of the HDMI cable to the eARC / ARC port on the back of your TV.



Steps 2:

Then connect the other end to the ARC port of the soundbar.



Steps 3:

Press "ARC" button on the remote control to select "ARC" input.


Note: Please turn on the "CEC" function on your TV.

When ARC is connected, your TV remote control can control the soundbar and TV simultaneously:

- 1 Turn on/off
- 2 Adjust the volume

If there is no sound: try setting the TV audio output to PCM: TV Settings > Home > Settings > Sound > Digital Audio Output > PCM


4 CONNECT TO TV VIA OPTICAL / AUX

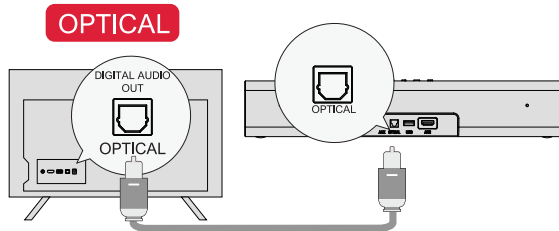

OPTION 1: OPTICAL

- 1 Make sure the TV's port is OPTICAL OUT, connect both sides of the cable to OPTICAL, for both the TV and the soundbar.
- 2 Make sure the optical plug is inserted correctly as it shows in the picture. Do not insert the plug upside down and break the optical.

Note: If audio is playing from the internal TV speakers, mute or minimize the TV volume.

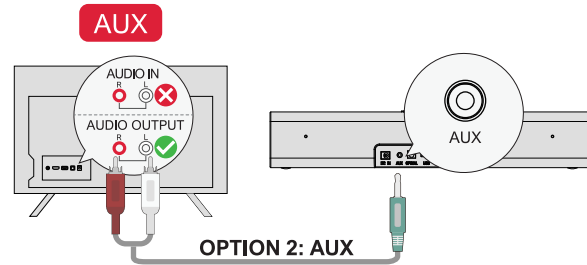

OPTION 2: AUX

- 1 Connect the 3.5mm to 3.5mm Audio Cable to your TV's AUDIO OUT port.
- 2 Not support AUDIO IN port on TV.


Note: Please remember to unplug the AUX cable from TV and Soundbar when you want to switch to other mode.

In Optical Mode: If there is no sound, try setting the TV audio output to PCM: TV Settings > Home > Settings > Sound > Digital Audio Output > PCM


5 CONNECT TO BLUETOOTH®

- 1 Press the "⌘" button on the soundbar or remote control to enter Bluetooth pairing mode.
- 2 Open your phone's Bluetooth settings, find and select "Poseidon M3T" to connect the soundbar.

Note: If it's already in the Bluetooth mode and connected, press and hold "⌘" button for 3 seconds to disconnect the current device and connect to new device manually on your mobile phone / PC / TV.

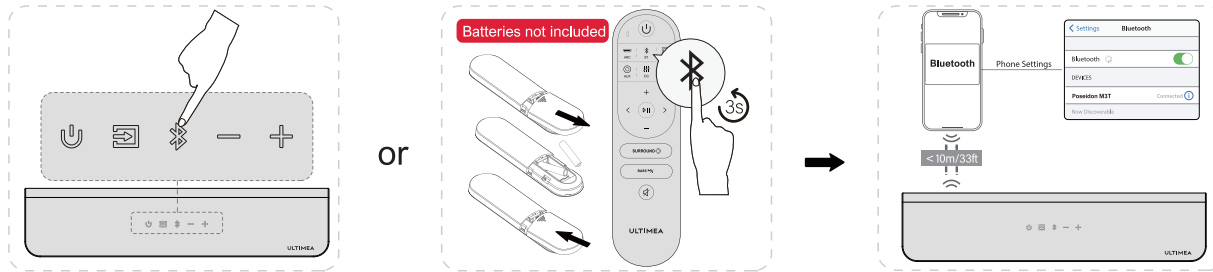


6 CONNECT TO SUBWOOFER AND SURROUND SPEAKERS

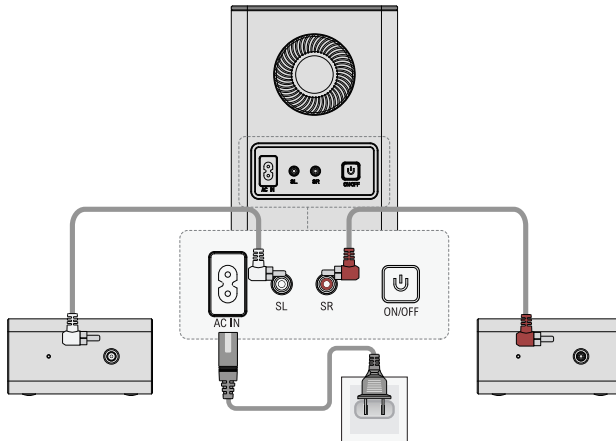


- 1 Use the 6m RCA-RCA cables to connect the subwoofer and surround speakers, please pay attention to match the same color interfaces on the surround speakers with the corresponding ones on the subwoofer and place the surround speakers accordingly.
- 2 Use power cable to connect your subwoofer and power port.

7 PAIRING SUBWOOFER

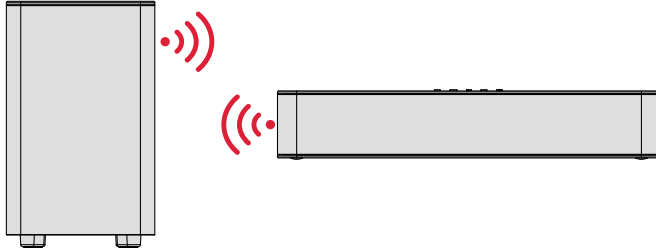

Note:
The subwoofer has been paired with the soundbar by ULTIMEA.

If there is no sound coming from the subwoofer, you need to repair the Soundbar with the subwoofer.



Step 1:

Press and hold the “BASS Mx” button on the remote control for 5 seconds, the display will show “5Lb” flashing.

Step 2:

Press and hold the ON / OFF button on subwoofer for 5 seconds, the white LED will be fast flashing.
The white LED will be always on when the subwoofer is paired successfully.

10 SPECIFICATIONS

Model Number	U2502
Power Supply	AC 100-240V, ~50/60Hz
Soundbar Drivers	2.25" × 3 (Soundbar) + 2.25" × 2 (Surround Speaker) + 5.25" (Subwoofer)
Frequency Response	45Hz - 18kHz
Standby Power	<0.5W
Operating Temperature	0°C - 45°C / 32°F - 113°F
Bluetooth Vision	5.3

Dimensions and Weight		
Soundbar	400(W) x 70(H) x 90(D)mm	15.7" x 2.8" x 3.5"
Subwoofer	155(W) x 244(H) x 215(D)mm	6.1" x 9.6" x 8.5"
Surround Speaker	135(W) x 70(H) x 90(D)mm	5.3" x 2.8" x 3.5"
Packaging	322(W) x 442(H) x 192(D)mm	12.7" x 17.4" x 7.5"
Net Weight	5.7kg / 12.6lbs	
Gross Weight	6.3kg / 13.9lbs	

11 SAFETY INSTRUCTIONS

Please read this user manual carefully and save it for future reference.

Do not make unauthorized alterations to the product, doing so may compromise safety, regulatory compliance, system performance, and may void the warranty.

- Avoid dropping.
- Do not disassemble.
- Do not submerge in water
- Avoid extreme temperatures.
- Do not use the device outdoors during thunderstorms.
- Use original or certified cables.
- Do not place dangerous items on top of this device (e.g. liquid filled objects, lit candles).
- Clean with a dry, soft lint-free cloth. Do not use any corrosive cleaner or oil.
- To avoid hearing damage, do not listen for extended periods at high volume.
- Do not expose the batteries to extreme heat sources such as direct sunlight or open flames.
- The ideal operating temperature for this product and its accessories is between 41°F/5°C and 95°F/35°C.
- The adapter should be installed near the device and should be easily accessible.
- Do not use this product in environments of extreme heat or cold. Never expose this device to strong sunshine or wet environments.

12 PROPER DISPOSAL INSTRUCTIONS



This mark shown on the product or its packaging, indicates that this product should not be disposed of with other household waste at the end of its working life.

To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources.

Waste Electrical & Electronic Equipment

Household user should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take this item for environmentally safe recycling.

Business users should contact their suppliers and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.

13 FCC REGULATORY COMPLIANCE

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

14 ICSED WARNINGS

This device contains licence-exempt transmitter (s) / receiver (s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS (s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) L'appareil ne doit pas produire de brouillage;
- (2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This equipment complies with IC exposure limits set forth for an uncontrolled environment. This equipment shall be installed and operated with a minimum distance of 20cm between the radiator & body.

Cet équipement est conforme aux limites d'exposition IC définies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec une distance minimale de 20cm entre le radiateur et la carrosserie.

Declaration of Conformity

We (Manufacturer is responsible for this declaration)
Ultimea Technology (Shenzhen) Limited
(Company name)

20th Floor, Building 4, Tianan Cloud Park, Bantian St.,
Longgang District Shenzhen, China 518000
(Company address)

Declare under our sole responsibility that the product
Trade Mark: ULTIMEA

Product Name: Poseidon M3T 5.1 Channel Virtual
Surround Soundbar
Model No.: U2502

To which this declaration relates
is in conformity with the essential
requirement set out in the Council
Directive on the Approximation of
the laws of the Member States
relating to RED Directive
(2014/53/EU) & RoHS
(2011/65/EU) product is
responsible to affix CE marking,
the following standards were
applied:

EN 55032:2015/A1:2020
EN 55035:2017/A11:2020
EN IEC 61000-3-2:2019/A1:2021
EN 61000-3-3:2013/A2:2021
ETSI EN 301 489-1 V2.2.3 (2019-11)
ETSI EN 301 489-17 V3.2.4 (2020-09)
ETSI EN 300 328 V2.2.2 (2019-07)
EN 50663: 2017
EN IEC 62368-1:2020+A11:2020
IEC 62321-3-1:2013
IEC 62321-4:2013+A1:2017
IEC 62321-5:2013

IEC 62321-6:2015
IEC 62321-7-1:2015
IEC 62321-7-2:2017
IEC 62321-8:2017

Full Name: Yoyo.Yu

Position: Approbation Manager

Signature: 

Place/Date: Shenzhen, China/
May. 13-2024

Trade Marks :



The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Soundlab Technology Co.,Ltd. is under license. Other trademarks and trade names are those of their respective owners.



The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

ULTIMEA

Poseidon M3T 5.1 Channel Virtual Surround Soundbar

Model No.: U2502

Made in China

Manufacturer: Ultimea Technology (Shenzhen) Limited

Address: 20th Floor, Building 4, Tianan Cloud Park, Bantian St.,
Longgang District, Shenzhen, China 518000



If you need our support, kindly reach out to our service team. We are always glad to help.

+1 888-598-8875 (US)

Mon-Fri 9am-5pm (PST)

+49 89-628-25828 (EU)

Mon-Fri 9am-5pm (CET)



support@ultimea.com



support.ultimea.com



@ultimea_official