ULTIMEA

Dolby Atmos

HDMI HIGH-DEFINITION MULTIMEDIA INTERFACE

Bluetooth®



Benutzerhandbuch

Poseidon D60


Modell-Nr.: U2520


5.1-Kanal Dolby Atmos Soundbar

1 WICHTIGE SICHERHEITSHINWEISE


- 1. Bitte lesen Sie diese Anleitung sorgfältig durch und bewahren Sie sie auf. Befolgen Sie alle Warnhinweise und bedienen Sie das Gerät gemäß der Anleitung.
- 2.Verwenden Sie das Gerät nicht in der Nähe von Wasser, in feuchter Umgebung oder im Regen. Vermeiden Sie es, Flüssigkeiten auf das Gerät zu verschütten oder Gegenstände mit Flüssigkeiten (wie Vasen) darauf zu stellen.
- 3. Reinigen Sie das Gerät nur mit einem trockenen Tuch. Verwenden Sie keine flüssigen Reinigungsmittel.
- 4. Decken Sie die Lüftungsöffnungen nicht ab und installieren Sie das Gerät nicht in einem beengten Raum. Sorgen Sie für ausreichende Belüftung und installieren Sie das Gerät gemäß den Anweisungen des Herstellers.
- 5. Installieren Sie das Gerät nicht in der Nähe von Wärmequellen wie Heizkörpern, Öfen, Verstärkern oder anderen Geräten, die Wärme erzeugen. Decken Sie die Lüftungsöffnungen nicht mit Zeitungen oder Vorhängen ab.
- 6. Verwenden Sie nur vom Hersteller angegebene Zubehörteile, Ständer oder Halterungen. Wenn Sie Geräte mit Rollen verwenden, seien Sie beim Bewegen vorsichtig, um ein Umkippen zu vermeiden.
- 7. Schützen Sie das Netzkabel davor, dass darauf getreten, es eingeklemmt oder geknickt wird, insbesondere an Steckern, Steckdosen und der Stelle, wo es aus dem Gerät austritt.
- 8. Verändern Sie nicht die Polarisation oder die Erdungseigenschaften des Steckers. Wenn der Stecker nicht in die Steckdose passt, lassen Sie die Steckdose von einem Elektriker austauschen.
- 9. Ziehen Sie bei Gewitter oder bei längerem Nichtgebrauch den Netzstecker.
- 10. Stellen Sie keine offenen Flammenquellen wie brennende Kerzen auf das Gerät.
- 11. Öffnen Sie das Gerät nicht. Im Inneren herrscht Hochspannung, die zu Stromschlägen oder Tod führen kann. Alle Wartungsarbeiten müssen von qualifiziertem Fachpersonal durchgeführt werden.
- 12. Die Installationshöhe des Geräts darf 2 Meter nicht überschreiten.

2 ZUBEHÖRLISTE

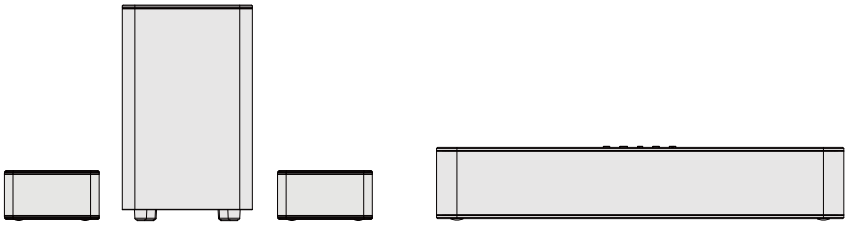





Soundbar-Netzadapter(2m/78")




Subwoofer-Netzkabel(2m/78")



Surround-Anschlusskabel (6m/236")




HDMI-Kabel (1.5m/59")




Digitales optisches Kabel(1.5m/59")




Fernbedienung



Halterungsschraube




Halterung



Wanddübel

3 SOUNDBAR-BEDIENELEMENTE

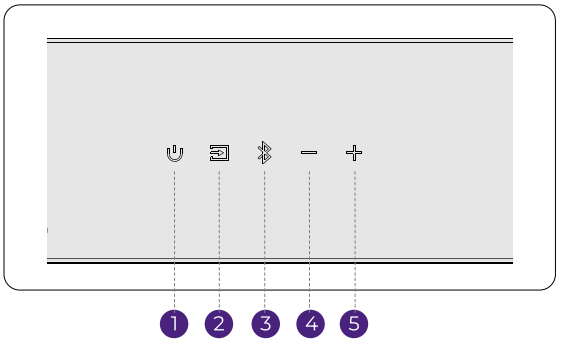

BEDIENFELD

1. **“⏻”: Ein-/Aus-Taste**
   Drücken, um das Gerät ein-/auszuschalten.


2. **“⏏”: Quelle**
   Drücken zum Umschalten: eARC - OPT(OPTICAL) - Bluetooth® - AUX - USB.

3. **“”: Bluetooth®**
   Drücken für Bluetooth®-Modus, automatische Kopplung.
   3 Sek. gedrückt halten, um zu trennen und neu zu koppeln. (Bluetooth®-ID: Poseidon D60)

4. **“−”: Lautstärke −**


5. **“+”: Lautstärke +**

4 FERNBEDIENUNG

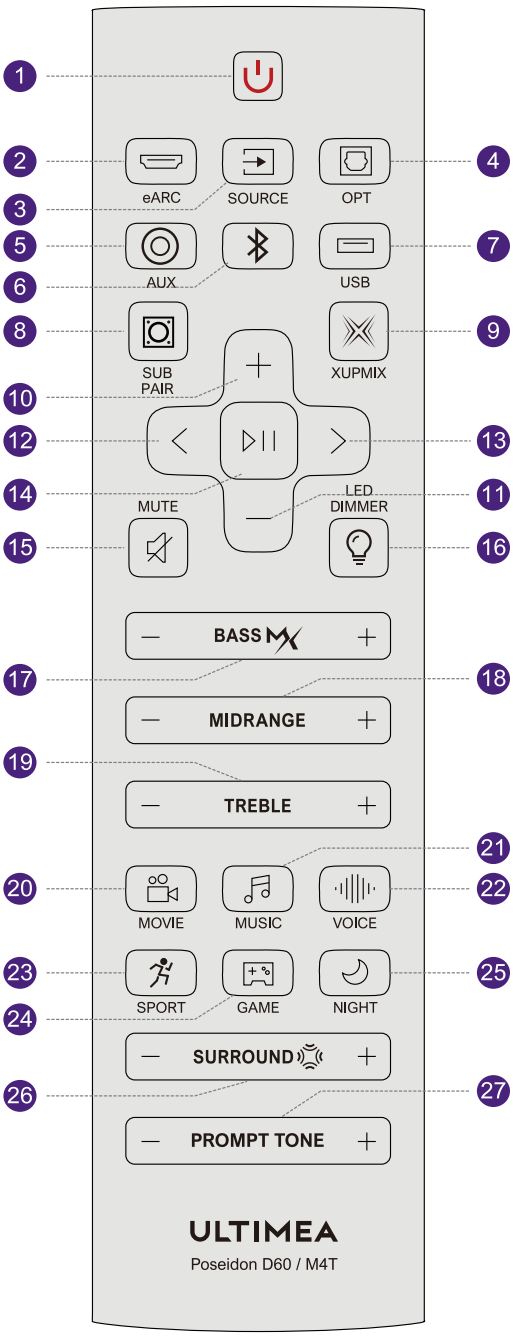


1. "⏻" : **Ein-/Aus-Taste**
   Drücken, um das Gerät ein-/auszuschalten.
2. "▭": **eARC**
   Drücken Sie, um auf den HDMI-eARC-Kanal umzuschalten.
3. "⇥": **SOURCE**
   Drücken, um zwischen den Kanälen zu wechseln.
4. "▣": **OPT**
   Drücken Sie, um auf den OPTISCHEN Kanal umzuschalten.
5. "◎":**AUX**
   Drücken Sie, um auf den AUX-Kanal umzuschalten.
6. "ᛒ": **Bluetooth®**
   Drücken, um zum Bluetooth-Kanal zu wechseln.
7. "▭": **USB**
   Drücken Sie, um auf den USB-Kanal umzuschalten.
8. "▣": **SUB PAIR**
   Halten Sie die Taste 3 Sekunden lang gedrückt, um die Soundbar in den Zustand zu versetzen, in dem sie für die Kopplung mit dem Subwoofer bereit ist.
9. "✕": **XUPMIX**
   Die Standardeinstellung ist „on", wodurch eine einheitliche Steuerung der Aktivierung und Deaktivierung der 6 Klangeffekt-Modi ermöglicht wird.
   Xupmix on: Der Surround-Kanal-Sound wird durch ein reichhaltiges Mehrkanalsignal bereitgestellt, das vom Algorithmus verarbeitet wird, und bietet so ein noch intensiveres Klangerlebnis.
   Xupmix off: Der Surround-Kanal-Sound wird basierend auf den linken und rechten Kanalsignalen mittels eines Algorithmus optimiert, was zu einem breiteren Klangbühnen-Effekt führt.
10. "+": **Lautstärke erhöhen**
11. "—": **Lautstärke verringern**
12. "<": **Zurück**
    Nur im Bluetooth®- und USB-Modus: Zum vorherigen Titel springen.
13. ">": **Weiter**
    Nur im Bluetooth®- und USB-Modus: Zum nächsten Titel springen.
14. "▷II": **Wiedergabe / Pause**
    Nur im Bluetooth®- und USB-Modus.
15. "🔇": **MUTE**
    Stummschalten. Drücken und 5 Sekunden lang halten, um zurückzusetzen.
16. "💡": **LED DIMMER**
    Drücken, um die Displayhelligkeit in 5 Stufen einzustellen. Drücken und 3 Sekunden lang halten, um das LED-Display auszuschalten.
17. "BASS ✕": **BASSMX**
    Drücken, um den Bass einzustellen.
18. "MIDRANGE": **MIDRANGE**
    Drücken Sie, um den Mitteltonpegel einzustellen.
19. "TREBLE": **TREBLE**
    Drücken Sie, um den Höhenpegel einzustellen.
20. "🎥": **MOVIE**
    Drücken, um in den FILM-Modus zu wechseln. Das Display zeigt an: "E91".
21. "♫": **MUSIC**
    Drücken, um in den MUSIK-Modus zu wechseln. Das Display zeigt an: "E92".
22. "〰": **VOICE**
    Drücken, um in den STIMME-Modus zu wechseln. Das Display zeigt an: "E93".
23. "🏃": **SPORT**
    Drücken, um in den SPORT-Modus zu wechseln. Das Display zeigt an: "E94".
24. "🎮": **GAME**
    Drücken, um in den SPIEL-Modus zu wechseln. Das Display zeigt an: "E95".
25. "☾": **NIGHT**
    Drücken, um in den NACHT-Modus zu wechseln. Das Display zeigt an:" E96".
26. "SURROUND": **SURROUND**
    Drücken Sie, um den Surround-Sound-Pegel einzustellen.
27. "PROMPT TONE": **PROMPT TONE**
    Drücken, um die Lautstärke des Hinweistons einzustellen. Das Display zeigt dann: "Pt 0", "Pt 1", "Pt 2", "Pt 3".

5 RÜCKSEITE

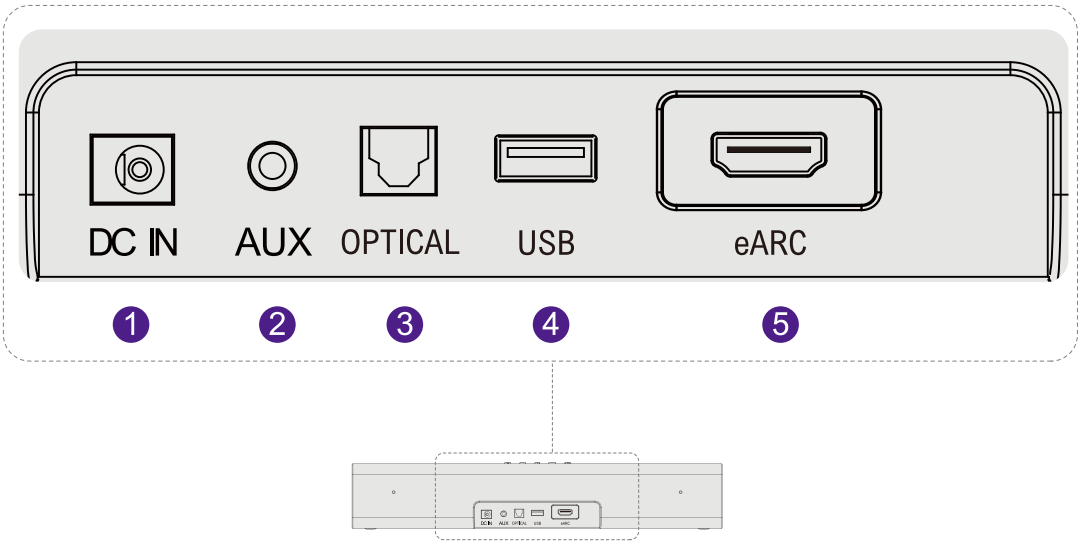


1. **DC IN**
2. **AUX**
3. **OPTICAL**
4. **USB (Unterstützt MP3- oder FLAC-Dateien)**
5. **HDMI to TV(eARC)**

6 SYSTEMPLATZIERUNG

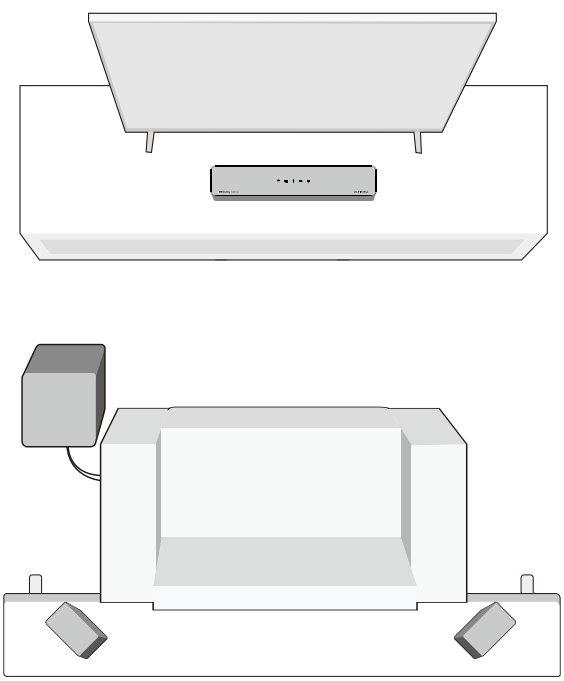

Hinweis: Platzieren Sie die Soundbar auf Ohrhöhe oder in deren Nähe.


7 WANDBEFESTIGUNG

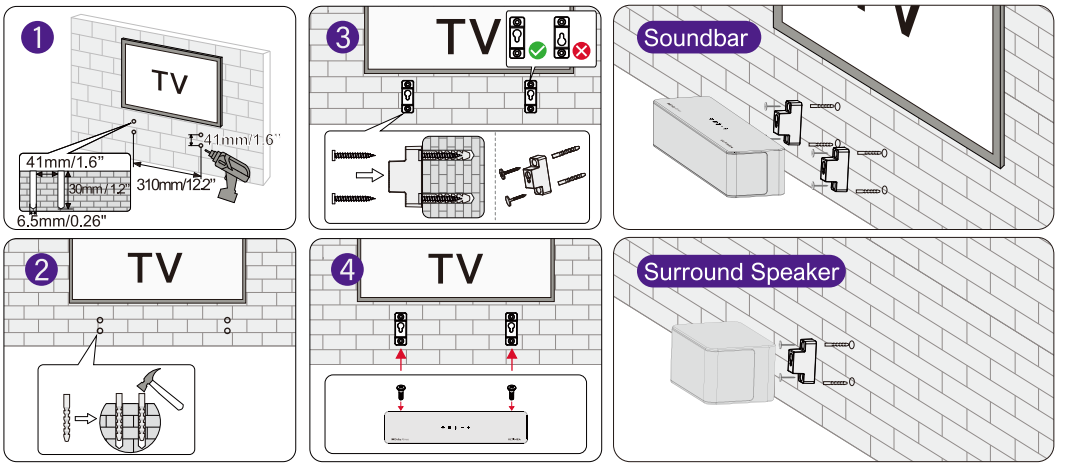


Hinweis: Die Wandhalterung für die Surround-Lautsprecher ist identisch mit der des Sound-Lautsprechers, daher ist der vertikale Lochabstand derselbe wie bei der Soundbar und die Installationsmethode ist ebenfalls gleich.

8 ANSCHLIESSEN UND EINSCHALTEN

1 Schließen Sie die Soundbar an die Stromversorgung an.

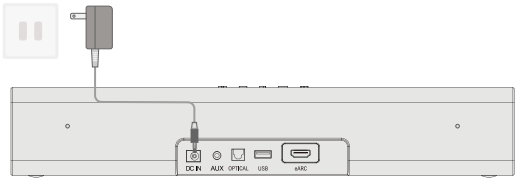


2 Schließen Sie den Subwoofer an die Stromversorgung an.




3 Schließen Sie den Subwoofer und die Surround-Lautsprecher mit dem Surround-Lautsprecherkabel an.

Die Surround-Satellitenlautsprecher auf der rechten Seite haben rote Anschlüsse, während die Surround-Satellitenlautsprecher auf der linken Seite weiße Anschlüsse haben.

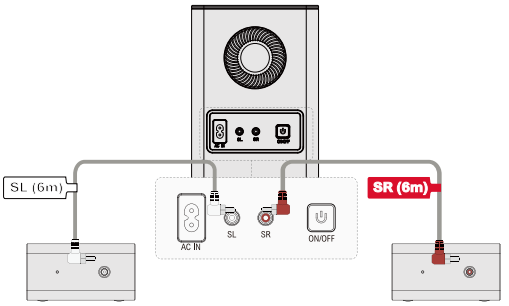

4 Batterien in die Fernbedienung einsetzen.


Hinweis: Alkalibatterien empfohlen. Wiederaufladbare Batterien werden nicht empfohlen.




9 TV-ANSCHLUSS ÜBER HDMI eARC

1. Verbinden Sie ein Ende des HDMI-Kabels mit dem eARC/ARC-Anschluss am TV.

2. Schließen Sie das andere Ende an den eARC-Anschluss der Soundbar an.

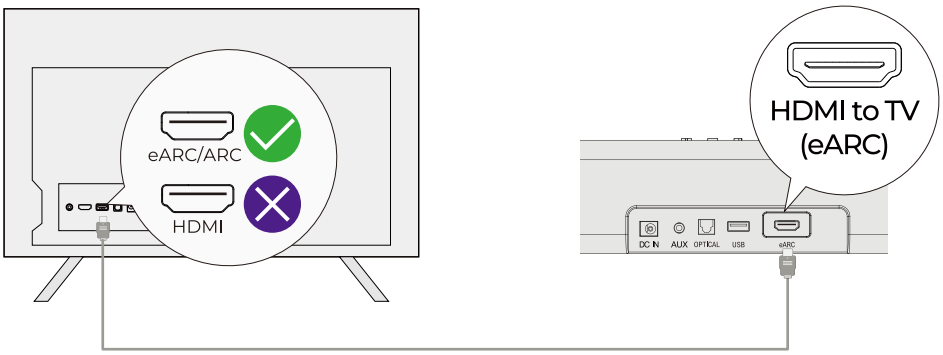

3. Drücken Sie die "Source"-Taste an der Soundbar oder der Fernbedienung, um den "eARC"-Eingang auszuwählen.

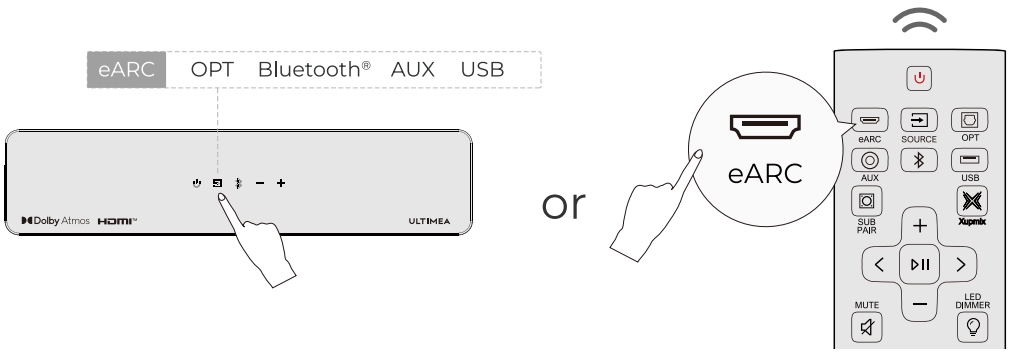

Hinweis: Stellen Sie sicher, dass der HDMI-Anschluss Ihres Fernsehers eARC unterstützt; andernfalls kann das Dolby-Atmos-Audiosignal nicht übertragen werden.


Dolby Atmos: Wenn Sie Inhalte im Dolby-Atmos-Format ansehen, stellen Sie den Audioausgang Ihres Fernsehers auf „Pass Through“ ein.
TV-Einstellungen > Startseite > Einstellungen > Ton > Digitaler Audioausgang > Pass Through

HDMI eARC (Enhanced Audio Return Channel) ist eine aktualisierte Version von ARC, die hochwertigere Audioformate wie Dolby Atmos unterstützt.

Hinweis: Aktivieren Sie die „CEC“-Funktion an Ihrem Fernseher. Wenn eARC angeschlossen ist, kann Ihre Fernbedienung sowohl die Soundbar als auch den Fernseher gleichzeitig steuern:
(1) Ein-/Ausschalten (Standby)
(2) Lautstärke anpassen


10 TV-ANSCHLUSS ÜBER OPTISCHES KABEL

1. Stellen Sie sicher, dass Ihr Fernseher über einen OPTICAL OUT-Anschluss verfügt. Verbinden Sie den OPTICAL OUT-Anschluss des Fernsehers mit dem OPTICAL IN-Anschluss der Soundbar mithilfe eines optischen Kabels.

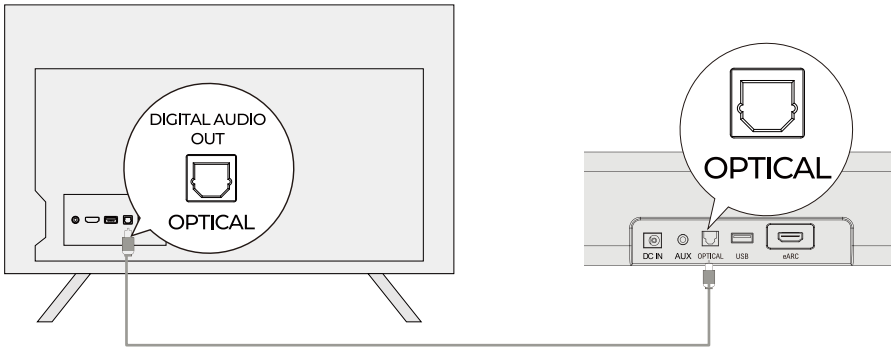


2. Stellen Sie sicher, dass der Stecker des optischen Kabels wie in der Abbildung gezeigt richtig eingesteckt ist. Stecken Sie den Stecker nicht verkehrt herum ein, da dies den optischen Anschluss beschädigen kann.

3. TV-Einstellungen > Home > Ton > Digitaler Audioausgang > PCM

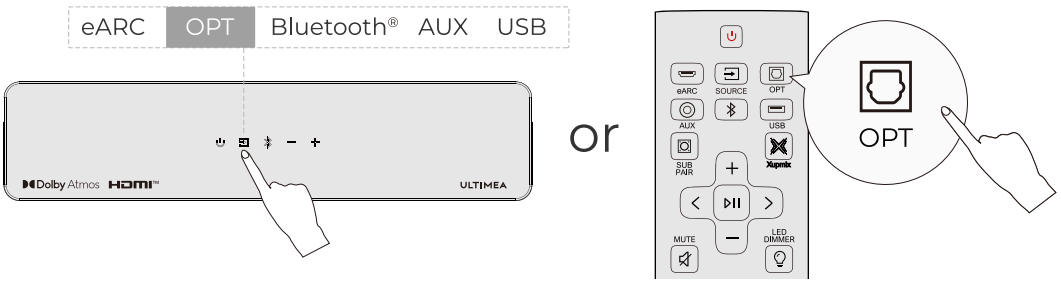

Hinweis: Wenn der Ton über die internen Lautsprecher des Fernsehers wiedergegeben wird, schalten Sie den Fernseher stumm oder drehen Sie die Lautstärke auf das Minimum. Der optische Anschluss unterstützt kein Dolby Atmos. Verwenden Sie HDMI eARC, um das bestmögliche Dolby Atmos-Erlebnis zu genießen.

11 MIT BLUETOOTH® VERBINDEN

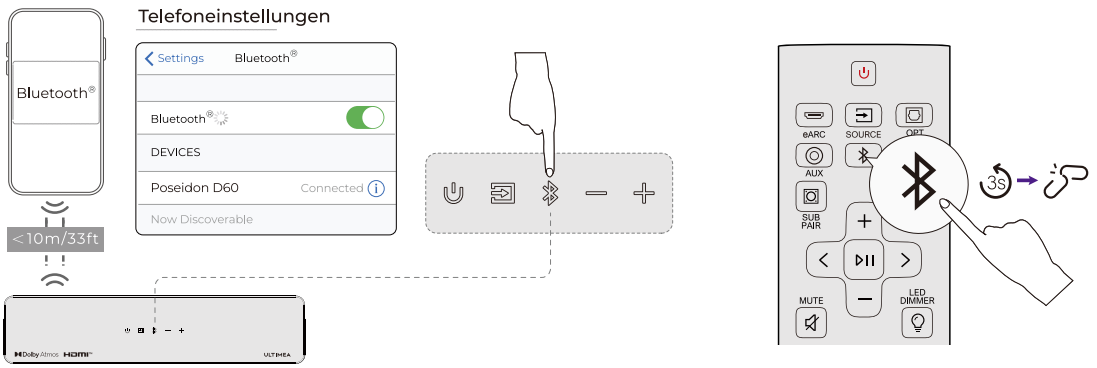


1. Drücken Sie die Taste „ ” an der Soundbar oder Fernbedienung, um den Bluetooth®-Kopplungsmodus zu starten.

2. Öffnen Sie die Bluetooth-Einstellungen und wählen Sie „Poseidon D60“.

3. Hinweis: Wenn sich die Soundbar bereits im Bluetooth-Modus befindet und mit einem Gerät verbunden ist, halten Sie die Taste „ “ 3 Sekunden lang gedrückt, um die aktuelle Verbindung zu trennen. Wählen Sie anschließend die Soundbar auf Ihrem Smartphone, PC oder Fernseher aus, um eine neue Bluetooth-Verbindung herzustellen.

12 SUBWOOFER NEU KOPPELN

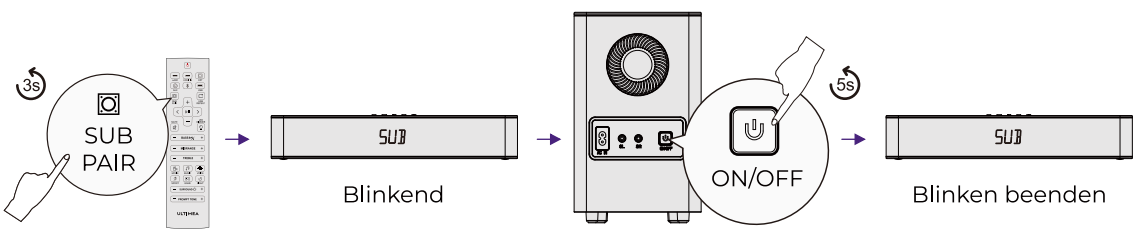

Normalerweise sind Soundbar und Subwoofer vorab gekoppelt.
Wenn die Verbindung verloren geht, folgen Sie bitte den untenstehenden Schritten.


1. Halten Sie die Taste „SUB PAIR“ 3 Sekunden gedrückt.
   Die Anzeige blinkt „ SUB “ als Kopplungsanzeige.

2. Halten Sie die Pairing-Taste auf der Rückseite des Subwoofers 5 Sekunden gedrückt.

3. Nach erfolgreicher Kopplung hört das Blinken auf und die Kontrollleuchte bleibt an.

13 WERKSEINSTELLUNGEN WIEDERHERSTELLEN

Halten Sie die MUTE-Taste 5 Sekunden gedrückt, um die Werkseinstellungen wiederherzustellen.

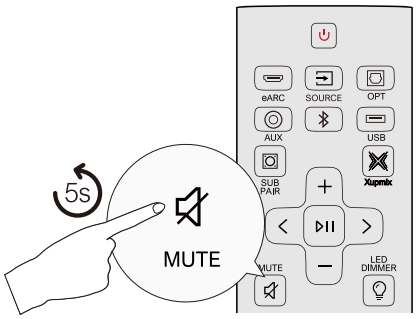


14 ANPASSEN DER HINWEISTON-LAUTSTÄRKE


Download Ultimea App

Available on the App Store

GET IT ON Google Play

ULTIMEA



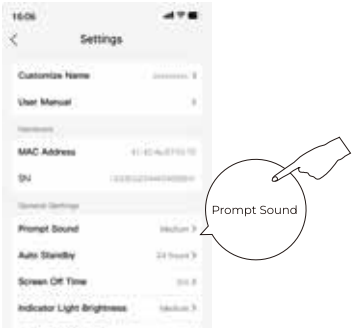

Wenn der Hinweiston zu laut ist, können Sie ihn über die ULTIMEA App anpassen.

1. Scannen Sie den QR-Code, um die ULTIMEA App herunterzuladen, und fügen Sie die Soundbar hinzu.
2. Öffnen Sie die Gerätedetails, tippen Sie auf Einstellungen und wählen Sie „Prompt Sound “, um den Pegel anzupassen.

15 TECHNISCHE DATEN

Model Number	U2520
Power Supply	DC 18V 3A (Soundbar) / AC 100~240V (Subwoofer)
Soundbar Drivers	Soundbar: 2.25" × 3, Surround: 2.25" × 2, Subwoofer: 5.25"
Auto Standby	The soundbar will turn to standby mode if there is no audio signal for 15 minutes. You can set the standby time in the App
Standby Power	<0.5W
Operating Temperature	-10°C – 40°C / 14°F – 104°F
Bluetooth® Version	5.3

Soundbar	400 x 70x 90 mm/15.7" x 2.8" x 3.5"
Subwoofer	155x244x215mm/6.1"x9.6"×8.5"
Surround	135x70x90mm/5.3"x2.8"x3.5"
Packaging	328x440x190mm/12.9"×17.3" x 7.5"
Packaging Weight	6.35 kg /14 lbs

USB Output	5V 500mA
Operating Altitude	2000 meters above sea level
Wall Mount Screw	4 × 32 mm / 0.16" × 1.26"
Bracket Screws Diameter	3 mm / 0.12"
Remote Control Battery Type	2 × AAA (NOT INCLUDED)
Notice: Risk of fire or explosion if the battery is replaced by an incorrect type.	

PROPER DISPOSAL INSTRUCTIONS



This mark shown on the product or its packaging, indicates that this product should not be disposed of with other household waste at the end of its working life. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources.

For indoor use only



This symbol indicates that the product is intended for indoor use only.

Class II equipment



This symbol indicates that the product is Class II equipment.

Waste Electrical & Electronic Equipment

Household user should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take this item for environmentally safe recycling.

Business users should contact their suppliers and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.

WIRELESS FREQUENCY RANGE AND WIRELESS OUTPUT POWER:

Frequency: 2.402GHz-2.48GHz

The Max. transmit power (Applies only to the EU): 10 dBm

FCC REGULATORY COMPLIANCE

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

(1) This device may not cause harmful interference.

(2) This device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

ISED WARNINGS

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

(1) This device may not cause interference.

(2) This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux

CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence.

L'exploitation est autorisée aux deux conditions suivantes :

1) L'appareil ne doit pas produire de brouillage;

2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

3) The device meets the exemption from the routine evaluation limits in issue6 of RSS 102 and compliance with RSS-102 RF exposure, users can obtain Canadian information on RF exposure and compliance.

Le dispositif rencontre l'exemption des limites courantes d'évaluation dans la numéro 6 de RSS 102 etla conformité à l'exposition de RSS-102 rf, utilisateurs peut obtenir l'information canadienne surl'exposition et la conformité de rf.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.

Cet émetteur ne doit pas être Co-placé ou ne fonctionnant en même temps qu'aucune autre antenne ouémetteur. Cet équipement devrait être installé et actionné avec une distance minimum de 20 centimètres entre le radiateur et votre corps.

Wireless Capability Description:

The subwoofer is equipped with a wireless signal reception module, enabling it to receive audio signals from the main device for playback. This device only supports wireless signal reception and cannot relay or forward signals.

The two surround speakers in the system are designed for wired connection and do not have the ability to transmit or receive wireless signals.

The remote control uses infrared (IR) technology for device control and does not support any other wireless signal transmission or reception capabilities.

⚠ **CA WARNING:** Can expose you to BPA, a carcinogen, and BPA, a reproductive. toxicant. See www.P65Warnings.ca.gov.

CE WARNINGS

1) Do not install this equipment in a confined or building-in space such as a book case or similar unit, and remain a well ventilation conditions. The ventilation should not be impeded by covering the ventilation openings with items such as newspaper, table-cloths, curtains etc.

2) WARNING: To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture. The apparatus shall not be exposed to dripping or splashing and that objects filled with liquids, such as vases, shall not be placed on apparatus.

3) WARNING: The adapter plug is used as disconnect device, the disconnect device shall remain readily operable.

4) Frequency: 2.402GHz-2.48GHz

5) The Max. transmit power: 10 dBm

EU Declaration of Conformity

We (Manufacturer is responsible for this declaration)
Ultimea Technology (Shenzhen) Limited
(Company name)

9th Floor, Building A, Shenzhen Industrial Software Park, Bantian Street, Longgang District, Shenzhen, China 518000 (Company address)

Declare under our sole responsibility that the product

Trade Mark: ULTIMEA
Product Name: Poseidon D60 5.1 Channel Dolby Atmos Soundbar
Model No.: U2520

The product to which this declaration relates is in conformity with the essential requirements set out in the Council Directive on the Approximation of the laws of the Member States relating to the Radio Equipment Directive (2014/53/EU), the Restriction of Hazardous Substances Directive (2011/65/EU), the Electromagnetic Compatibility Directive (2014/30/EU), and the Low Voltage Directive (2014/35/EU). The product is responsible for affixing the CE marking, and the following standards were applied:

EN 55032:2015/A1:2020

EN 55035:2017/A11:2020

EN IEC 61000-3-2:2019/A1:2021

EN 61000-3-3:2013/A2:2021

ETSI EN 301 489-1 V2.2.3 (2019-11)

ETSI EN 301 489-17 V3.3.1 (2024-09)

ETSI EN 300 328 V2.2.2 (2019-07)

EN 50663: 2017

EN IEC 62368-1:2020+A11:2020

IEC 62321-3-1:2013

IEC 62321-4:2013+A1:2017

IEC 62321-5:2013

IEC 62321-6:2015

IEC 62321-7-1:2015

IEC 62321-7-2:2017

IEC 62321-8:2017

Full Name: Yoyo.Yu
Position: Approbation Manager

Signature: yoyo yu

Place/Date: Shenzhen, China / Sep. 13-2024

Trade Marks:

Dolby, Dolby Atmos, and the double-D symbol are registered trademarks of Dolby Laboratories Licensing Corporation. Manufactured under license from Dolby Laboratories. Confidential unpublished works. Copyright © 2012–2024 Dolby Laboratories. All rights reserved.

HDMI™ HIGH-DEFINITION MULTIMEDIA INTERFACE

The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

Bluetooth®

The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Ultimea Technology (Shenzhen) Limited. is under license. Other trademarks and trade names are those of their respective owners.

General specification (English):

Model: U2520
Sound system: 5.1 channel
Power supply: 18V 3A DC(Soundbar);
100-240V~50/60Hz AC (Subwoofer)
Drivers: 2.25"×3(Soundbar) + 2.25"×2 (Surround)
+5.25"(Subwoofer)
Standby Power: <0.5W
USB Output: 5V 500mA DC
Operating Temperature: -10°C-40°C/14°F-104°F
Operating Altitude: 2000 meters above sea level
Wall Mount Screw: 4 × 32 mm / 0.16" × 1.26"
Bracket Screws Diameter: 3 mm / 0.12"
Remote Control Battery Type: 2 x AAA (NOT INCLUDED)
Notice: Risk of fire or explosion if the battery is replaced by an incorrect type.

Dimensions

・Soundbar dimensions (W x H x D):
400 x 70 x 90 mm / 15.7" x 2.8" x 3.5"
・Subwoofer dimensions (W x H x D):
155 x 244 x 215 mm / 6.1" x 9.6" x 8.5"
・Surround dimensions (W x H x D):
135 x 70 x 90 mm / 5.3" x 2.8" x 3.5"
・Packaging dimensions (W x H x D):
328 x 440 x 190 mm / 12.9" x 17.3" x 7.5"
・Packaging Weight: 6.35 kg / 14 lbs

Power Consumption and Wireless Connection Setup Guide

1. Information on power consumption
This equipment complies with European COMMISSION REGULATION (EU) 2023/826.
・Off: N/A
・Standby (when all wireless connections are deactivated): < 0.5 W
・Networked standby for Soundbar: < 2.0 W
*The duration for the device to enter standby mode can be set in the app. Changing this setting may lead to a significant increase in energy consumption, negatively impacting the environment.
2. The period of time after which the power management function switches the equipment automatically into:

Off	N/A	
Standby	When the soundbar is idle (with no playback or operation) and neither Bluetooth®nor the app is connected.	Switched to standby mode after 15 minutes.
Networked standby	When Bluetooth® or the app is connected.	Switched to networked standby mode after 15 minutes of inactivity in operational mode.

3. If this equipment has the wireless network connections:
How to activate wireless network connections:
・Set up the equipment properly;
・Switch into wireless mode (Bluetooth®);
・Connect with energy using products (e.g. players/ game consoles/ STB (Set-Top Boxes)/ phones/ tablets /PCs). How to deactivate wireless network connections: ・Switch to another channel besides Bluetooth® ;
・Then long press on the remote control for more than 3 seconds.

For other languages of the above content
(DE, FR, ES, IT, PT, NL, PL, SV, TR, JP, CN, TC, KO, ID, TH, AR), please scan the QR code

IMPORTANT SAFETY INSTRUCTIONS (English):

1.Please read and retain this manual. Follow all warnings and operate according to the instructions.
2.Do not use the device near water sources, in damp environments, or in the rain. Avoid splashing liquids or placing objects containing liquids (such as vases) on the device.
3.Clean only with a dry cloth. Do not use liquid cleaners.
4.Do not block ventilation openings or install the device in an enclosed space. Ensure proper ventilation and install according to the manufacturer's instructions.
5.Do not install the device near heat sources such as radiators, stoves, or amplifiers. Do not cover the ventilation openings with items such as newspapers or curtains.
6.Use only attachments, stands, or accessories specified by the manufacturer. When using a device with wheels, move with care to avoid tipping.
7.Protect the power cord from being pinched, stepped on, or bent, especially at plugs, outlets, and the point where it exits the device.
8.Do not alter the polarized or grounding-type plug. If the plug does not fit into the outlet, consult an electrician to replace the outlet.
9.Unplug the device during lightning storms or when unused for long periods. To fully disconnect power, unplug the device from the wall outlet and ensure the plug is accessible.
10.Do not place any open flame sources (such as lit candles) on or near the device.
11.Do not attempt to open the device. High voltage inside may be fatal. There are no user-serviceable parts inside. All servicing must be performed by qualified personnel.
12.The installation height of the device must not exceed 2 meters.

Scan QR for safety info / QR-Code für Infos scannen / Scanner le QR pour infos / Escanee QR para info / Scansiona il QR per info / Leia o QR para info / Scan QR-code voor info / Zeskanuj kod QR / Skanna QR för info / QR kodu tara / QRコードをスキャン / 扫码查看安全信息 / 掃碼查看安全資訊 / QR 코드 스캔 / Pindai QR untuk informasi keselamatan / สแกน QR เพื่อดูข้อมูลความปลอดภัย / امسح رمز QR لمعلومات السلامة

ULTIMEA

Product Name: Poseidon D60 5.1 Channel Dolby Atmos Soundbar
Model No.: U2520
HVIN: U2520S3

EC REP
Ultimea GmbH
Buchenring 57, 22359 Hamburg, Germany

UK REP
EVATOST CONSULTING LTD
Office 101 32 Threadneedle Street, London,
United Kingdom, EC2R 8AY

© Ultimea Inc. All rights reserved, registered in the United States and other countries.
801 S. Dupont Ave., Ste G, Ontario, CA, 91761, USA

Made in China
Manufacturer: Ultimea Technology (Shenzhen) Limited
Address: 9th Floor, Building A, Shenzhen Industrial Software Park, Bantian Street, Longgang District, Shenzhen, China 518000

Manufacturer Contact Information:

+1 888-598-8875 (US)
Mon-Fri 9am-5pm (PST)

+49 89-628-25828 (EU)
Mon-Fri 9am-5pm (CET)

support@ultimea.com

support.ultimea.com

If you need our support, kindly reach out to our service team.
We are always glad to help.

Download Ultimea App

GET IT ON Google Play

Available on the App Store

ULTIMEA

Search for “ULTIMEA” on social media.

R 214-240436

FR
Cet appareil, ses accessoires, et cordons se recyclent
REPRISE À LA LIVRAISON
OU
À DÉPOSER EN MAGASIN
OU
À DÉPOSER EN DÉCHÈTERIE
Points de collecte sur www.uefairedemesdechets.fr

Warranty Extension Plan

Regardless of where you purchased your Ultimea product, you can easily opt for this extended warranty.
Scan to check out our extended warranty options.