ULTIMEA

Dolby Atmos

HDMI
HIGH-DEFINITION MULTIMEDIA INTERFACE

Bluetooth®



ユーザーマニュアル


Poseidon M4T


型番: U2522
5.1ch Dolby Atmos サウンドバー

1 重要な安全上の注意


- 1.この取扱説明書をよく読み、大切に保管してください。すべての警告に従い、説明書に従って操作してください。
- 2.水の近く、湿気の多い場所、または雨の中で本機を使用しないでください。液体を本機にこぼしたり、液体の入った物体（花瓶など）を本機の上に置いたりしないでください。
- 3.乾いた布でのみ清掃してください。液体洗浄剤は使用しないでください。
- 4.通気口をふさいだり、本機を密閉された空間に設置したりしないでください。適切な換気を確保し、メーカーの指示に従って本機を設置してください。
- 5.本機をラジエーター、ストーブ、アンプ、その他の発熱機器などの熱源の近くに設置しないでください。新聞紙やカーテンなどで通気口を覆わないでください。
- 6.メーカー指定の付属品、スタンド、またはアクセサリーのみを使用してください。車輪付きの機器を使用する場合は、移動時に転倒を防ぐよう注意してください。
- 7.電源コードを踏んだり、挟んだり、折り曲げたりしないよう保護してください。特にプラグ、コンセント、およびコードが本機から出ている部分に注意してください。
- 8.プラグの極性や接地機能を変更しないでください。プラグがコンセントに合わない場合は、電気工事士に相談してコンセントを交換してください。
- 9.落雷時や長期間使用しない場合は、電源プラグを抜いてください。
- 10.ろうそくの火などの裸火源を本機の上に置かないでください。
- 11.本機を開けようとしないでください。内部には高電圧があり、感電や死亡事故を引き起こす恐れがあります。すべての修理は資格のある技術者に依頼してください。
- 12.本機の設置高さは2メートルを超えてはなりません。

2 付属品一覧

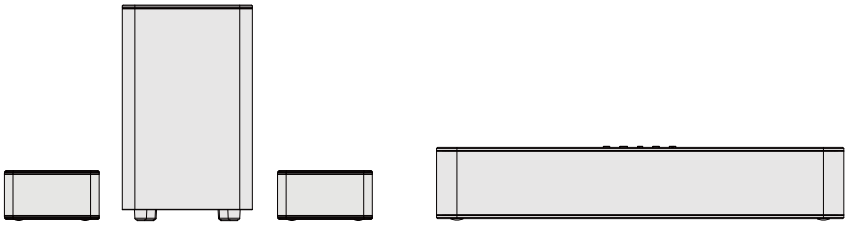





サウンドバー電源アダプター(2m/78")




サブウーファー電源コード(2m/78")



サラウンド接続ケーブル(6m/236")




HDMIケーブル(1.5m/59")




デジタル光ケーブル(1.5m/59")




リモコン



取付ネジ




ブラケット



壁用アンカー

3 サウンドバー操作

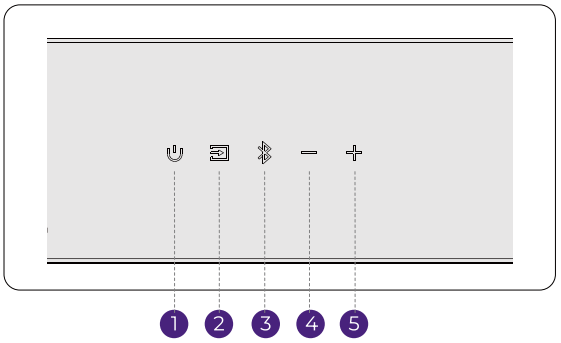

操作パネル

❶ **“⏻”: 電源ボタン**
押して電源オン/オフ

❷ **“⏏”: 入力切替**
押して入力切替：eARC - OPT(OPTICAL) - Bluetooth® - AUX - USB.


❸ **“ᛒ”: Bluetooth®**
押すとBluetooth®モード、自動ペアリング
3秒長押しで切断・再ペアリング（ID: Poseidon M4T）

❹ **“−”: 音量−**

❺ **“+”:音量＋**


4 リモコン

1. “⏻”：**電源ボタン**
押して電源オン/オフ.
2. “▭”: **eARC**
押すとHDMI eARCチャンネルに切り替わります。
3. “⇥”: **SOURCE**
押して入力ソースを切り替えます。
4. “▣”: **OPT**
押すとOPTICALチャンネルに切り替わります。
5. “◎”: **AUX**
押すとAUXチャンネルに切り替わります。
6. “ᛒ”: **Bluetooth®**
Bluetooth®チャンネルに切り替えます。
7. “▭”: **USB**
押すとUSBチャンネルに切り替わります。
8. “▣”: **SUB PAIR**
ボタンを3秒間長押しして、サウンドバーをサブウーファーとのペアリング準備状態にします。
9. “ᛞ”: **XUPMIX**
デフォルト設定は「オン」であり、6つのサウンドエフェクトモードの有効化と無効化を統一的に制御できます。
Xupmix on：サラウンドチャンネルサウンドは、アルゴリズムによって処理されたリッチなマルチチャンネル信号から提供され、より没入感のある聴覚体験を提供します。
Xupmix off：サラウンドチャンネルサウンドは、左右のチャンネル信号に基づいてアルゴリズムで最適化され、より広がりのあるサウンドフィールド効果をもたらします。
10. “＋”: **音量＋**
11. “－”: **音量－**
12. “＜”: **前へ**
Bluetooth® ・USBモード時のみ：前の曲へ。
13. “＞”: **次へ**
Bluetooth®・USBモード時のみ：次の曲へ。
14. “⏯”: **再生／一時停止**
Bluetooth®・USBモード時のみ。
15. “🔇”: MUTE
ミュート。リセットするには5秒間長押ししてください。
16. “💡”: **LED DIMMER**
押すと、ディスプレイの明るさを5段階で調整できます。
長押し（3秒）でディスプレイの表示をオフにします。
17. “BASS ᛞ”: **BASSMX**
押して低音を調整。
18. “MIDRANGE”: **MIDRANGE**
押すとミッドレベルを調整します。
19. “TREBLE”: **TREBLE**
押すとトレブルレベルを調整します。
20. “📹”: **MOVIE**
押すとムービーモードに切り替わり、
ディスプレイに「E91」と表示されます。
21. “♫”: **MUSIC**
押すとミュージックモードに切り替わり、
ディスプレイに「E92」と表示されます。
22. “〰”: **VOICE**
押すとボイスモードに切り替わり、
ディスプレイに「E93」と表示されます。
23. “🏃”: **SPORT**
押すとスポーツモードに切り替わり、
ディスプレイに「E94」と表示されます。
24. “🎮”: **GAME**
押すとゲームモードに切り替わり、
ディスプレイに「E95」と表示されます。
25. “🌙”: **NIGHT**
押すとナイトモードに切り替わり、
ディスプレイに「E96」と表示されます。

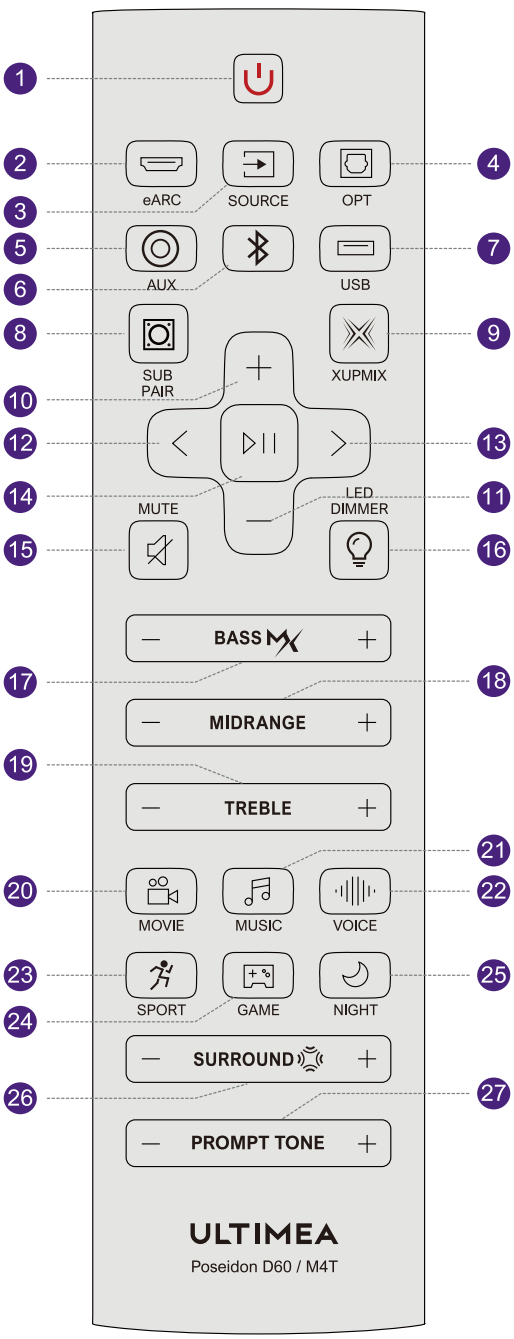


26. “SURROUND”: **SURROUND**
押すとサラウンドレベルを調整します。
27. “PROMPT TONE”: **PROMPT TONE**
押して操作音のレベルを調整します。
ディスプレイには
「Pt 0」、「Pt 1」、「Pt 2」、「Pt 3」
と表示されます。

5 背面パネル

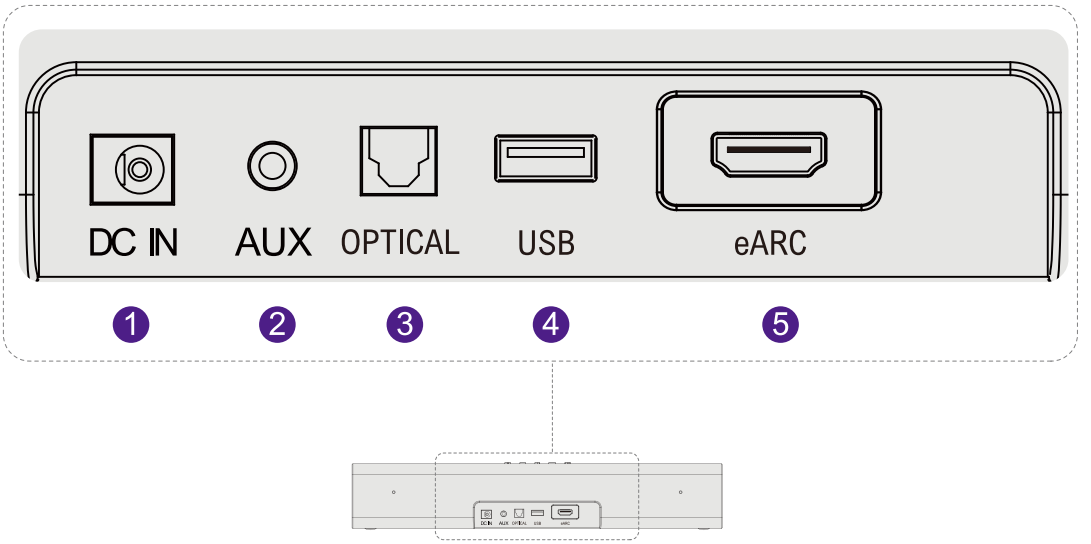


1. **DC IN**
2. **AUX**
3. **OPTICAL**
4. **USB (MP3 / FLACファイル対応)**
5. **HDMI TO TV(EARC)**

6 設置位置

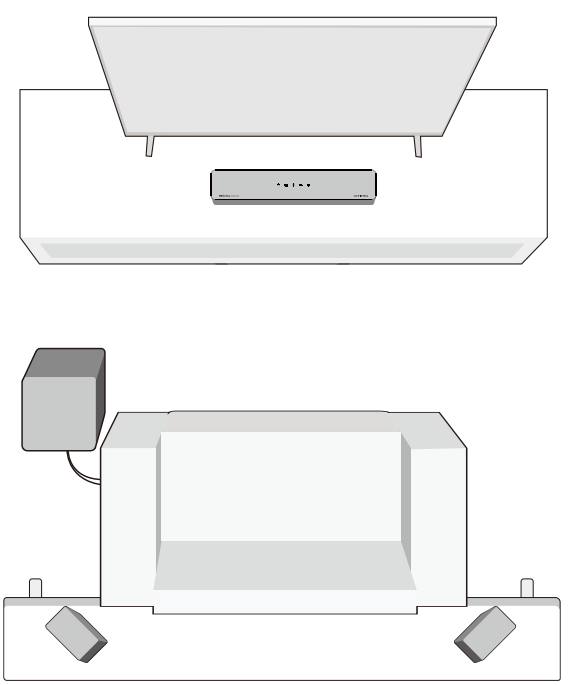

注:最良の音質のため耳の高さに設置してください。


7 壁掛け設置

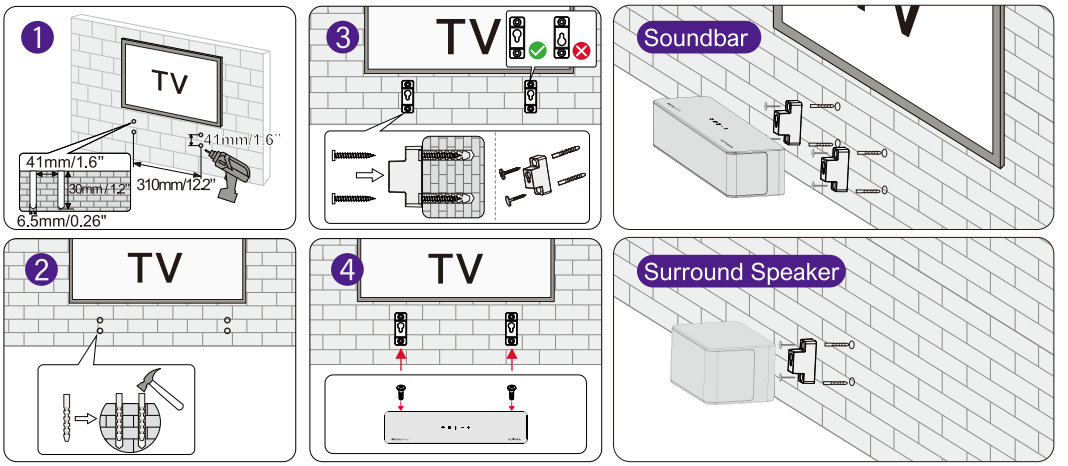


注:サラウンドスピーカーに使用する壁掛けブラケットは、サウンドスピーカーのものと同じです。
そのため、垂直の穴間隔はサウンドバーと同じで、取り付け方法も同じです。

8 接続と電源オン


1 サウンドバーを電源に接続します。

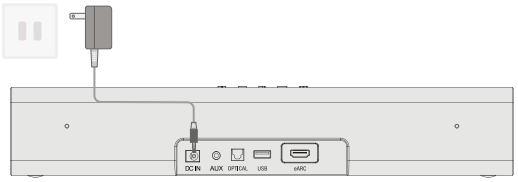


2 サブウーファーを電源に接続します。



3 サブウーファーとサラウンドスピーカーを付属のケーブルで接続します。
右側のサラウンドスピーカーには赤色の端子、左側のサラウンドスピーカーには白色の端子を接続してください。

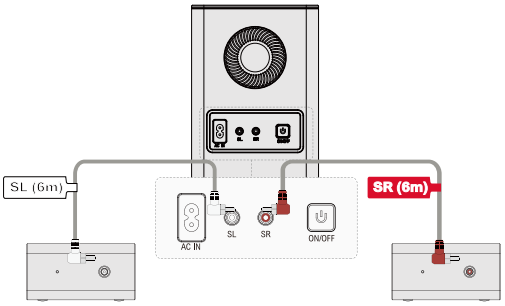


4 リモコンに電池を入れます。
"注：アルカリ電池推奨。
充電式電池は非推奨。"




9 HDMI eARCでTVに接続

1. HDMIケーブルをTV背面のeARC/ARC端子に接続します。
2. もう一方をサウンドバーのeARC端子に接続します。

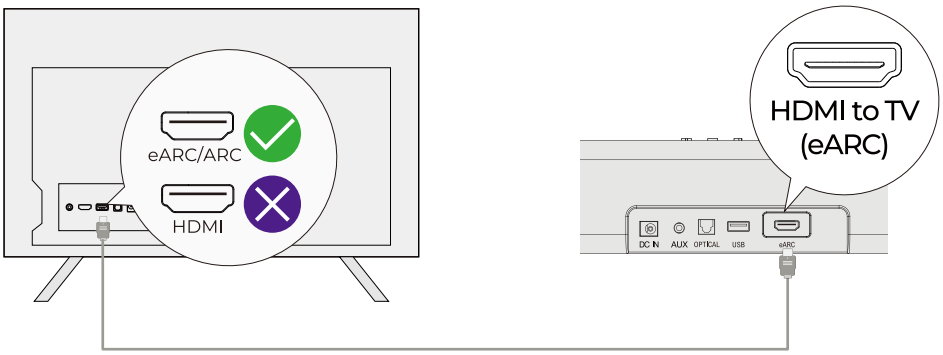

3. サウンドバーまたはリモコンの「Source」ボタンを押して、「eARC」入力を選択してください。

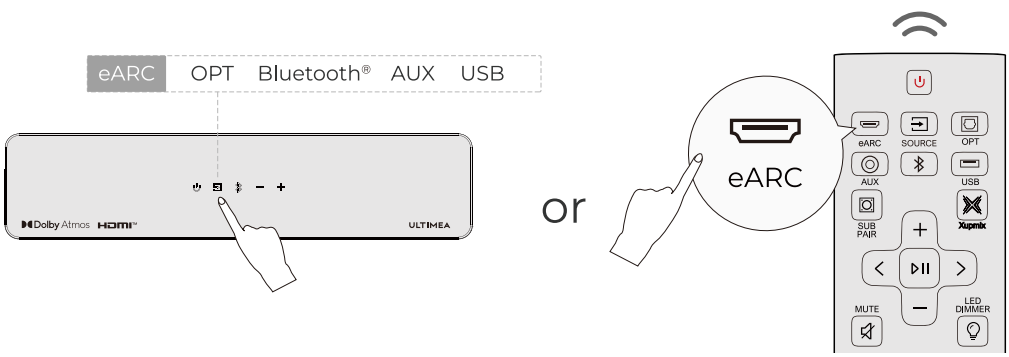

注意：テレビのHDMIポートがeARCに対応していることを確認してください。対応していない場合、Dolby Atmosオーディオ信号を伝送できません。


Dolby Atmos: Dolby Atmos形式のコンテンツを視聴する場合は、テレビの音声出力を「パススルー」に設定してください。
TV設定 > ホーム > 設定 > サウンド > デジタル音声出力 > パススルー

HDMI eARC（Enhanced Audio Return Channel）はARCのアップグレード版であり、Dolby Atmosなどの高品質オーディオフォーマットをサポートします。

注意：テレビの「CEC」機能を有効にしてください。eARCが接続されている場合、テレビのリモコンでサウンドバーとテレビの両方を同時に操作できます：
(1) 電源オン / スタンバイ
(2) 音量調整


10 光デジタルでTV接続

1. テレビにOPTICAL OUT端子があることを確認してください。光デジタルケーブルを使用して、テレビのOPTICAL OUT端子とサウンドバーのOPTICAL IN端子を接続します。

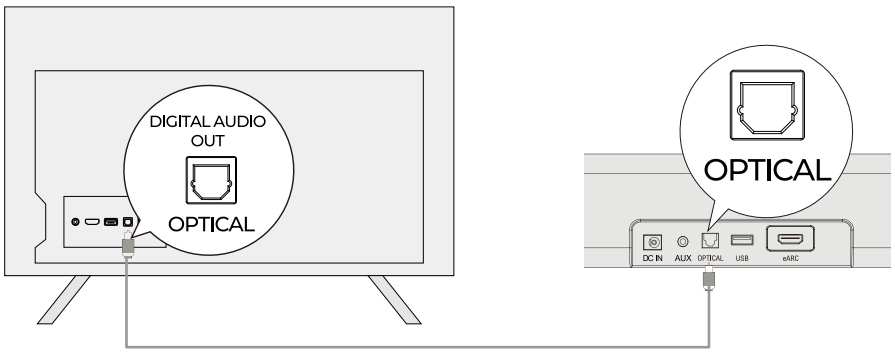

2. 図のように、光デジタルケーブルのプラグが正しい向きで差し込まれていることを確認してください。逆向きに差し込むと光デジタル端子が破損するおそれがあるため、無理に差し込まないでください。


3. TV設定 > ホーム > 設定 > サウンド > デジタル音声出力 > PCM

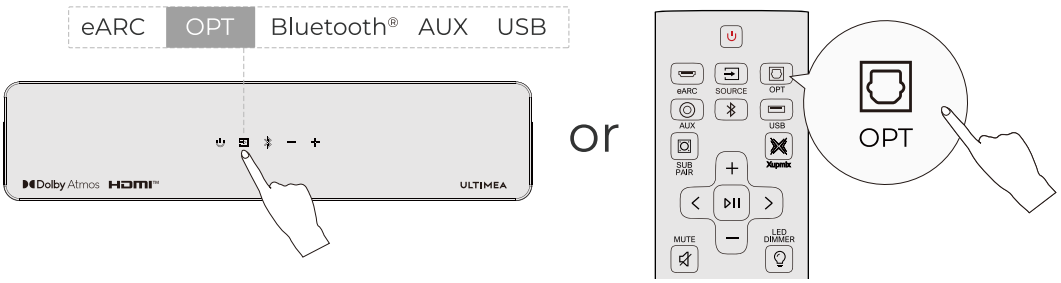

注意：テレビの内蔵スピーカーから音声が出力されている場合は、テレビをミュートにするか、音量を最小まで下げてください。

光デジタル端子はDolby Atmosに対応していません。最高のDolby Atmos体験を得るには、HDMI eARCを使用してください。

11 BLUETOOTH®に接続

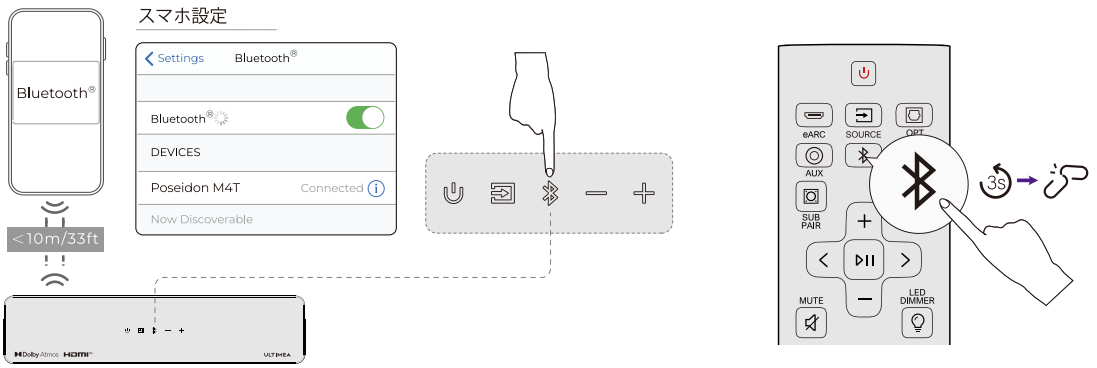


1. 本体またはリモコンの「」ボタンを押してBluetooth®ペアリングモードに入ります。

2. Bluetooth®設定で「Poseidon M4T」を選択します。

3. 注：サウンドバーがすでにBluetoothモードで機器に接続されている場合は、「」ボタンを3秒間長押しして、現在接続中の機器との接続を解除します。その後、スマートフォン、パソコン、またはテレビでサウンドバーを手動で選択し、新しいBluetooth接続を確立してください。

12 サブウーファー再ペアリング

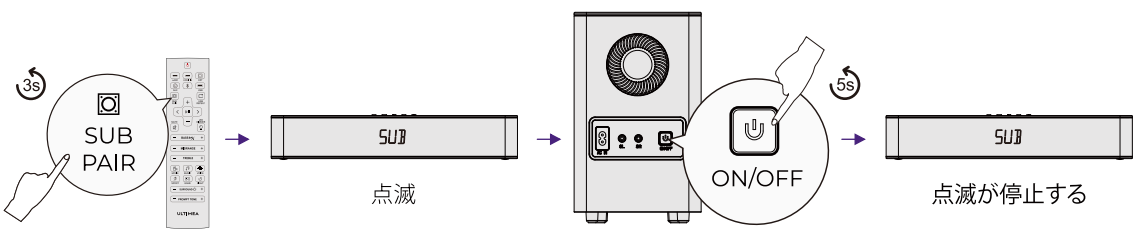

通常、サウンドバーとサブウーファーは事前にペアリングされています。
接続が切れた場合は、以下の手順で再ペアリングしてください。


1. リモコンの「SUB PAIR」を3秒間押し続けます。
本体表示が「SUB」で点滅し、ペアリングモードを示します。

2. サブウーファー背面のペアリングボタンを5秒間押し続けます。

3. ペアリングが成功すると表示の点滅が停止し、インジケーターが点灯します。

13 工場出荷時設定に戻す

MUTEボタンを5秒間押し続けて工場出荷時設定に戻します。

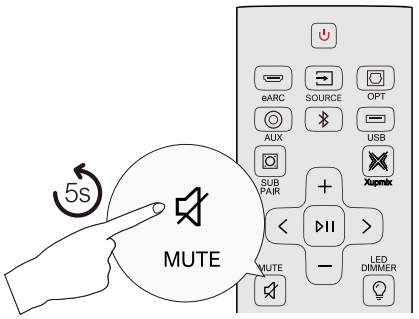


14 プロンプト音量の調整


Download Ultimea App

Available on the App Store

GET IT ON Google Play

ULTIMEA



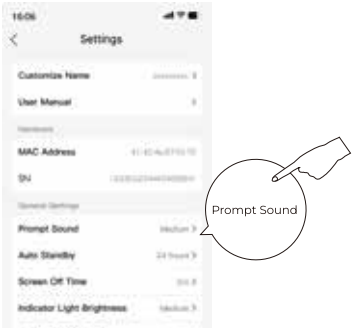

プロンプト音が大きい場合、ULTIMEAアプリで調整できます。

1. QRコードをスキャンしてULTIMEAアプリをダウンロードし、サウンドバーを追加します。
2. デバイス詳細を開き、右上の設定をタップし「Prompt Sound 」を選択して調整します。

15 製品仕様

Model Number	U2522
Power Supply	DC 18V 3A (Soundbar) / AC 100~240V (Subwoofer)
Soundbar Drivers	Soundbar: 2.25" × 3, Surround: 2.25" × 2, Subwoofer: 5.25"
Auto Standby	The soundbar will turn to standby mode if there is no audio signal for 15 minutes. You can set the standby time in the App
Standby Power	＜0.5W
Operating Temperature	-10°C – 40°C / 14°F – 104°F
Bluetooth® Version	5.3

Soundbar	400 x 70x 90 mm/15.7" x 2.8" x 3.5"
Subwoofer	155x244x215mm/6.1"x9.6"×8.5"
Surround	135x70x90mm/5.3"x2.8"x3.5"
Packaging	328x440x190mm/12.9"×17.3" x 7.5"
Packaging Weight	6.35 kg /14 lbs

USB Output	5V 500mA
Operating Altitude	2000 meters above sea level
Wall Mount Screw	4 × 32 mm / 0.16" × 1.26"
Bracket Screws Diameter	3 mm / 0.12"
Remote Control Battery Type	2 × AAA (NOT INCLUDED)
Notice: Risk of fire or explosion if the battery is replaced by an incorrect type.	

PROPER DISPOSAL INSTRUCTIONS



This mark shown on the product or its packaging, indicates that this product should not be disposed of with other household waste at the end of its working life. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources.

For indoor use only



This symbol indicates that the product is intended for indoor use only.

Class II equipment



This symbol indicates that the product is Class II equipment.

Waste Electrical & Electronic Equipment

Household user should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take this item for environmentally safe recycling.
Business users should contact their suppliers and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.

WIRELESS FREQUENCY RANGE AND WIRELESS OUTPUT POWER:

Frequency: 2.402GHz-2.48GHz
The Max. transmit power (Applies only to the EU): 10 dBm

FCC REGULATORY COMPLIANCE

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
This device complies with Part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) This device may not cause harmful interference.
(2) This device must accept any interference received, including interference that may cause undesired operation.
NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.
However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

ISED WARNINGS

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

(1) This device may not cause interference.
(2) This device must accept any interference, including interference that may cause undesired operation of the device.
L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux
CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence.
L'exploitation est autorisée aux deux conditions suivantes :
1) L'appareil ne doit pas produire de brouillage;
2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.
3) The device meets the exemption from the routine evaluation limits in issue6 of RSS 102 and compliance with RSS-102 RF exposure, users can obtain Canadian information on RF exposure and compliance.
Le dispositif rencontre l'exemption des limites courantes d'évaluation dans la numéro 6 de RSS 102 etla conformité à l'exposition de RSS-102 rf, utilisateurs peut obtenir l'information canadienne surl'exposition et la conformité de rf.
This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.
Cet émetteur ne doit pas être Co-placé ou ne fonctionnant en même temps qu'aucune autre antenne ouémetteur. Cet équipement devrait être installé et actionné avec une distance minimum de 20 centimètres entre le radiateur et votre corps.

Wireless Capability Description:

The subwoofer is equipped with a wireless signal reception module, enabling it to receive audio signals from the main device for playback. This device only supports wireless signal reception and cannot relay or forward signals.
The two surround speakers in the system are designed for wired connection and do not have the ability to transmit or receive wireless signals.
The remote control uses infrared (IR) technology for device control and does not support any other wireless signal transmission or reception capabilities.

⚠ **CA WARNING:** Can expose you to BPA, a carcinogen, and BPA, a reproductive. toxicant. See www.P65Warnings.ca.gov.

CE WARNINGS

1) Do not install this equipment in a confined or building-in space such as a book case or similar unit, and remain a well ventilation conditions. The ventilation should not be impeded by covering the ventilation openings with items such as newspaper, table-cloths, curtains etc.
2) WARNING: To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture. The apparatus shall not be exposed to dripping or splashing and that objects filled with liquids, such as vases, shall not be placed on apparatus.
3) WARNING: The adapter plug is used as disconnect device, the disconnect device shall remain readily operable.
4) Frequency: 2.402GHz-2.48GHz
5) The Max. transmit power: 10 dBm

EU Declaration of Conformity

We (Manufacturer is responsible for this declaration)
Ultimea Technology (Shenzhen) Limited
(Company name)

9th Floor, Building A, Shenzhen Industrial Software Park, Bantian Street, Longgang District, Shenzhen, China 518000 (Company address)

Declare under our sole responsibility that the product
Trade Mark: ULTIMEA
Product Name: Poseidon M4T 5.1 Channel Dolby Atmos Soundbar
Model No.: U2522

The product to which this declaration relates is in conformity with the essential requirements set out in the Council Directive on the Approximation of the laws of the Member States relating to the Radio Equipment Directive (2014/53/EU), the Restriction of Hazardous Substances Directive (2011/65/EU), the Electromagnetic Compatibility Directive (2014/30/EU), and the Low Voltage Directive (2014/35/EU). The product is responsible for affixing the CE marking, and the following standards were applied:

EN 55032:2015/A1:2020

EN 55035:2017/A11:2020

EN IEC 61000-3-2:2019/A1:2021

EN 61000-3-3:2013/A2:2021

ETSI EN 301 489-1 V2.2.3 (2019-11)

ETSI EN 301 489-17 V3.3.1 (2024-09)

ETSI EN 300 328 V2.2.2 (2019-07)

EN 50663: 2017

EN IEC 62368-1:2020+A11:2020

IEC 62321-3-1:2013

IEC 62321-4:2013+A1:2017

IEC 62321-5:2013

IEC 62321-6:2015

IEC 62321-7-1:2015

IEC 62321-7-2:2017

IEC 62321-8:2017

Full Name: Yoyo.Yu
Position: Approbation Manager

Signature: yoyo yu

Place/Date: Shenzhen, China / Sep. 13-2024

Trade Marks:

Dolby, Dolby Atmos, and the double-D symbol are registered trademarks of Dolby Laboratories Licensing Corporation. Manufactured under license from Dolby Laboratories. Confidential unpublished works. Copyright © 2012–2024 Dolby Laboratories. All rights reserved.

HIGH-DEFINITION MULTIMEDIA INTERFACE

The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Ultimea Technology (Shenzhen) Limited. is under license. Other trademarks and trade names are those of their respective owners.

General specification (English):

Model: U2522
Sound system: 5.1 channel
Power supply: 18V 3A DC(Soundbar);
100-240V~50/60Hz AC (Subwoofer)
Drivers: 2.25"×3(Soundbar) + 2.25"×2 (Surround)
+5.25"(Subwoofer)
Standby Power: <0.5W
USB Output: 5V 500mA DC
Operating Temperature: -10°C-40°C/14°F-104°F
Operating Altitude: 2000 meters above sea level
Wall Mount Screw: 4 × 32 mm / 0.16" × 1.26"
Bracket Screws Diameter: 3 mm / 0.12"
Remote Control Battery Type: 2 x AAA (NOT INCLUDED)
Notice: Risk of fire or explosion if the battery is replaced by an incorrect type.

Dimensions

・Soundbar dimensions (W x H x D):
400 x 70 x 90 mm / 15.7" x 2.8" x 3.5"
・Subwoofer dimensions (W x H x D):
155 x 244 x 215 mm / 6.1" x 9.6" x 8.5"
・Surround dimensions (W x H x D):
135 x 70 x 90 mm / 5.3" x 2.8" x 3.5"
・Packaging dimensions (W x H x D):
328 x 440 x 190 mm / 12.9" x 17.3" x 7.5"
・Packaging Weight: 6.35 kg / 14 lbs

Power Consumption and Wireless Connection Setup Guide

1. Information on power consumption
This equipment complies with European COMMISSION REGULATION (EU) 2023/826.
・Off: N/A
・Standby (when all wireless connections are deactivated): < 0.5 W
・Networked standby for Soundbar: < 2.0 W
*The duration for the device to enter standby mode can be set in the app. Changing this setting may lead to a significant increase in energy consumption, negatively impacting the environment.
2. The period of time after which the power management function switches the equipment automatically into:

Off	N/A	
Standby	When the soundbar is idle (with no playback or operation) and neither Bluetooth® nor the app is connected.	Switched to standby mode after 15 minutes.
Networked standby	When Bluetooth® or the app is connected.	Switched to networked standby mode after 15 minutes of inactivity in operational mode.

3. If this equipment has the wireless network connections:
How to activate wireless network connections:
・Set up the equipment properly;
・Switch into wireless mode (Bluetooth®);
・Connect with energy using products (e.g. players/ game consoles/ STB (Set-Top Boxes)/ phones/ tablets /PCs). How to deactivate wireless network connections: ・Switch to another channel besides Bluetooth®;
・Then long press on the remote control for more than 3 seconds.

For other languages of the above content (DE, FR, ES, IT, PT, NL, PL, SV, TR, JP, CN, TC, KO, ID, TH, AR), please scan the QR code

IMPORTANT SAFETY INSTRUCTIONS (English):

1.Please read and retain this manual. Follow all warnings and operate according to the instructions.
2.Do not use the device near water sources, in damp environments, or in the rain. Avoid splashing liquids or placing objects containing liquids (such as vases) on the device.
3.Clean only with a dry cloth. Do not use liquid cleaners.
4.Do not block ventilation openings or install the device in an enclosed space. Ensure proper ventilation and install according to the manufacturer's instructions.
5.Do not install the device near heat sources such as radiators, stoves, or amplifiers. Do not cover the ventilation openings with items such as newspapers or curtains.
6.Use only attachments, stands, or accessories specified by the manufacturer. When using a device with wheels, move with care to avoid tipping.
7.Protect the power cord from being pinched, stepped on, or bent, especially at plugs, outlets, and the point where it exits the device.
8.Do not alter the polarized or grounding-type plug. If the plug does not fit into the outlet, consult an electrician to replace the outlet.
9.Unplug the device during lightning storms or when unused for long periods. To fully disconnect power, unplug the device from the wall outlet and ensure the plug is accessible.
10.Do not place any open flame sources (such as lit candles) on or near the device.
11.Do not attempt to open the device. High voltage inside may be fatal. There are no user-serviceable parts inside. All servicing must be performed by qualified personnel.
12.The installation height of the device must not exceed 2 meters.

Scan QR for safety info / QR-Code für Infos scannen / Scanner le QR pour infos / Escanee QR para info / Scansiona il QR per info / Leia o QR para info / Scan QR-code voor info / Zeskanuj kod QR / Skanna QR för info / QR kodu tara / QRコードをスキャン / 扫码查看安全信息 / 掃碼查看安全資訊 / QR 코드 스캔 / Pindai QR untuk informasi keselamatan / สแกน QR เพื่อดูข้อมูลความปลอดภัย / امسح رمز QR لمعلومات السلامة

ULTIMEA

Product Name: Poseidon M4T 5.1 Channel Dolby Atmos Soundbar
Model No.: U2522
HVIN: U2522

EC REP

Ultimea GmbH
Buchenring 57, 22359 Hamburg, Germany

UK REP

EVATOST CONSULTING LTD
Office 101 32 Threadneedle Street, London,
United Kingdom, EC2R 8AY

© Ultimea Inc. All rights reserved, registered in the United States and other countries.
801 S. Dupont Ave., Ste G, Ontario, CA, 91761, USA

Made in China
Manufacturer: Ultimea Technology (Shenzhen) Limited
Address: 9th Floor, Building A, Shenzhen Industrial Software Park, Bantian Street, Longgang District, Shenzhen, China 518000

Manufacturer Contact Information:

+1 888-598-8875 (US)
Mon-Fri 9am-5pm (PST)

+49 89-628-25828 (EU)
Mon-Fri 9am-5pm (CET)

support@ultimea.com

support.ultimea.com

If you need our support, kindly reach out to our service team.
We are always glad to help.

Download Ultimea App

GET IT ON Google Play

Available on the App Store

ULTIMEA

Search for “ULTIMEA” on social media.

RoHS

FR
Cet appareil, ses accessoires, et cordons se recyclent
REPRISE À LA LIVRAISON
OU
À DÉPOSER EN MAGASIN
OU
À DÉPOSER EN DÉCHÈTERIE
Points de collecte sur www.ueferedemesdechets.fr

Warranty Extension Plan

Regardless of where you purchased your Ultimea product,
you can easily opt for this extended warranty.
Scan to check out our extended warranty options.