ULTIMEA

Dolby Atmos

HDMI
HIGH-DEFINITION MULTIMEDIA INTERFACE

Bluetooth®




คู่มือผู้ใช้


Poseidon M4T

หมายเลขรุ่น: U2522
ซาวด์บาร์ Dolby Atmos 5.1 แชนแนล


- 1.โปรดอ่านและเก็บคำแนะนำเหล่านี้ไว้ ปฏิบัติตามคำเตือนทั้งหมดและใช้งานตามคำแนะนำ
- 2.ห้ามใช้อุปกรณ์ใกล้แหล่งน้ำ ในสภาพแวดล้อมที่ชื้น หรือกลางแจ้งท่ามกลางฝน หลีกเลี่ยงการทำของเหลวหกใส่เครื่อง หรือวางวัตถุที่มีของเหลว (เช่น แจกัน) ไว้ด้านบน
- 3.ทำความสะอาดด้วยผ้าแห้งเท่านั้น ห้ามใช้น้ำยาทำความสะอาดชนิดเหลว
- 4.ห้ามปิดกั้นช่องระบายอากาศ หรือติดตั้งเครื่องในพื้นที่อับอากาศ ตรวจสอบให้แน่ใจว่ามีการระบายอากาศที่เหมาะสม และติดตั้งตามคำแนะนำของผู้ผลิต
- 5.ห้ามติดตั้งเครื่องใกล้แหล่งความร้อน เช่น หม้อน้ำ เตา เครื่องขยายเสียง หรืออุปกรณ์อื่นๆ ที่ก่อให้เกิดความร้อน ห้ามปิดช่องระบายอากาศด้วยสิ่งของ เช่น หนังสือพิมพ์หรือผ้าม่าน
- 6.ใช้อุปกรณ์เสริม ขาตั้ง หรืออุปกรณ์ประกอบที่ระบุโดยผู้ผลิตเท่านั้น เมื่อใช้อุปกรณ์ที่มีล้อ ควรใช้ความระมัดระวังในการเคลื่อนย้ายเพื่อป้องกันการล้ม
- 7.ป้องกันสายไฟไม่ให้ถูกเหยียบ หนีบ หรืองอ โดยเฉพาะที่หัวปลั๊ก เต้ารับ และจุดที่สายไฟออกจากตัวเครื่อง
- 8.ห้ามปรับเปลี่ยนขั้วหรือระบบสายดินของปลั๊ก หากปลั๊กไม่พอดีกับเต้ารับ ให้ปรึกษาช่างไฟฟ้าเพื่อเปลี่ยนเต้ารับ
- 9.ถอดปลั๊กไฟในช่วงพายุฟ้าคะนอง หรือเมื่อไม่ได้ใช้งานเป็นเวลานาน
- 10.ห้ามวางแหล่งเปลวไฟ เช่น เทียนที่จุดไว้ บนตัวเครื่อง
- 11.ห้ามพยายามเปิดเครื่อง ภายในมีแรงดันไฟฟ้าสูงซึ่งอาจทำให้เกิดไฟฟ้าช็อตหรือเสียชีวิตได้ การซ่อมแซมทั้งหมดต้องดำเนินการโดยบุคลากรที่ผ่านการรับรอง
- 12.ความสูงในการติดตั้งเครื่องต้องไม่เกิน 2 เมตร

2 รายการอุปกรณ์

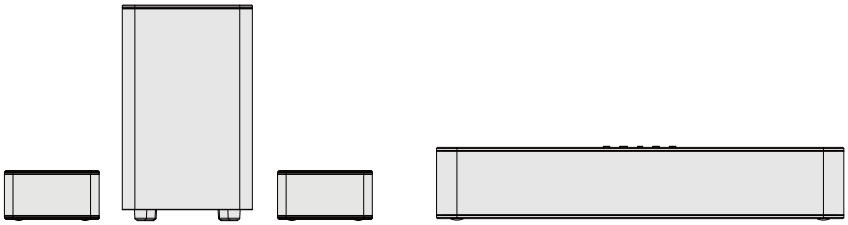





อะแดปเตอร์ไฟซาวด์บาร์
(2m/78")




สายไฟซับวูฟเฟอร์
(2m/78")



สายเชื่อมต่อเซอร์ราวด์
(6m/236")




สาย HDMI(1.5m/59")




สายออปติคอลดิจิทัล
(1.5m/59")




รีโมตคอนโทรล



สกรูขายึด




ขายึดติดผนัง



ปลอกขยายผนัง

3 การควบคุมซาวด์บาร์

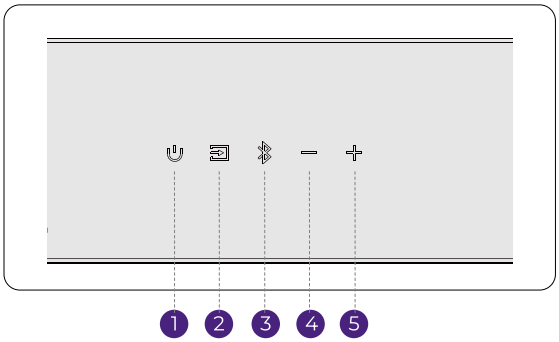

แผงควบคุม

❶ “ ⏻”: ปุ่มเปิด/ปิด
กดเพื่อเปิด/ปิดเครื่อง

❷ “ ⏍”: แหล่งสัญญาณ
กดเพื่อสลับ: eARC - OPT(OPTICAL) - Bluetooth® - AUX - USB.

❸ **“ ᛒ”: Bluetooth®**
กดเพื่อเข้าสู่โหมด Bluetooth® โดยระบบจะเข้าสู่โหมดจับคู่โดยอัตโนมัติ
กดค้าง 3 วินาทีเพื่อจับคู่ใหม่(ID: Poseidon M4T)

❹ “ —”: ลดเสียง

❺ “ +”: เพิ่มเสียง

1 “⏻” : ปุ่มเปิด/ปิด
กดเพื่อเปิด/ปิดเครื่อง

2 “▭”: **eARC**
กดเพื่อสลับไปยังช่อง HDMI eARC

3 “ ⎆”: **SOURCE**
กดเพื่อเปลี่ยนแหล่งสัญญาณเข้า

4 “▣”: **OPT**
กดเพื่อสลับไปยังช่อง OPTICAL

5 “◎”: **AUX**
กดเพื่อสลับไปยังช่อง AUX

6 “ ᛒ ”: **Bluetooth®**
กดเพื่อเปลี่ยนเป็น Bluetooth®

7 “▭”: **USB**
กดเพื่อสลับไปยังช่อง USB

8 “▣”: **SUB PAIR**
กดปุ่มค้างไว้ 3 วินาที เพื่อให้ซาวด์บาร์เข้าสู่สถานะพร้อมจับคู่กับซับวูฟเฟอร์

9 “ ᛪ ”: **XUPMIX**
การตั้งค่าเริ่มต้นคือ "เปิด" ซึ่งช่วยให้สามารถควบคุมการเปิดและปิดโหมดเอฟเฟกต์เสียงทั้ง 6 แบบได้อย่างเป็นเอกภาพ
Xupmix on: เสียงช่องเซอร์ราวด์จะมาจากสัญญาณหลายช่องสัญญาณที่หลากหลายซึ่งผ่านการประมวลผลโดยอัลกอริธึม มอบประสบการณ์การฟังที่สมจริงยิ่งขึ้น
Xupmix off: เสียงช่องเซอร์ราวด์จะถูกปรับให้เหมาะสมตามสัญญาณช่องซ้ายและขวาโดยใช้อัลกอริธึม ส่งผลให้เอฟเฟกต์สนามเสียงกว้างขึ้น

10 “ ＋ ”: เพิ่มเสียง

11 “ — ”: ลดเสียง

12 “ < ”: ก่อนหน้า
เฉพาะ BLUETOOTH®/USB: เพลงก่อนหน้า

13 “ > ”: ถัดไป
เฉพาะ BLUETOOTH®/USB: เพลงถัดไป

14 “▷II”: เล่น / หยุดชั่วคราว
เฉพาะ BLUETOOTH®/USB

15 “🔇”: **MUTE**
ปิดเสียง กดค้างไว้ 5 วินาทีเพื่อรีเซ็ต

16 “ 💡”: **LED DIMMER**
กดเพื่อปรับความสว่างหน้าจอได้ 5 ระดับ กดค้าง 3 วินาทีเพื่อปิดหน้าจอแสดงผล

17 “ BASS ᛪ ”: **BASSMX**
กดเพื่อปรับเบส

18 “ MIDRANGE ”: **MIDRANGE**
กดเพื่อปรับระดับเสียงย่านกลาง

19 “ TREBLE ”: **TREBLE**
กดเพื่อปรับระดับเสียงแหลม

20 “📹”: **MOVIE**
กดเพื่อสลับไปยังโหมดภาพยนตร์ หน้าจอจะแสดง: “ E91 ”.


21 “♫”: **MUSIC**
กดเพื่อสลับไปยังโหมดเพลง หน้าจอจะแสดง: “ E92 ”.

22 “ılıl”: **VOICE**
กดเพื่อสลับไปยังโหมดเสียงพูด หน้าจอจะแสดง: “ E93 ”.

23 “ 🏃”: **SPORT**
กดเพื่อสลับไปยังโหมดกีฬา หน้าจอจะแสดง: “ E94 ”.

24 “🎮”: **GAME**
กดเพื่อสลับไปยังโหมดเกม หน้าจอจะแสดง: “ E95 ”.


25 “ ☾”: **NIGHT**
กดเพื่อสลับไปยังโหมดกลางคืน หน้าจอจะแสดง: “ E96 ”.

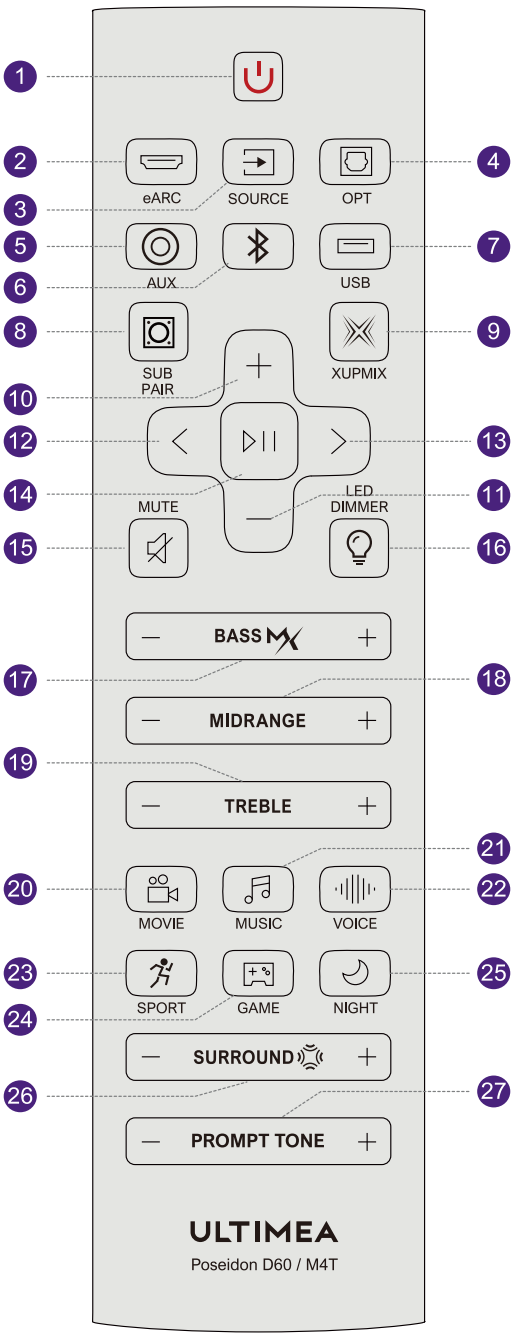

26 “ SURROUND ”: **SURROUND**
กดเพื่อปรับระดับเสียงเซอร์ราวด์

27 “ PROMPT TONE ”: **PROMPT TONE**
กดเพื่อปรับระดับเสียงแจ้งเตือน หน้าจอจะแสดง: “ Pt 0”, “ Pt 1”, “ Pt 2”, “ Pt 3”.

5 พอร์ตเชื่อมต่อแผงด้านหลัง

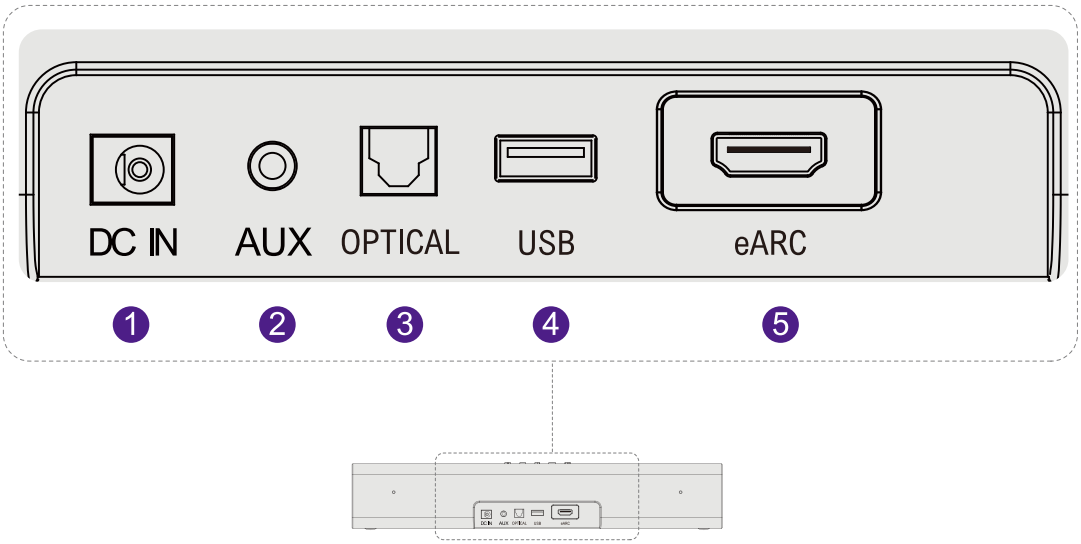

1 **DC IN**


2 **AUX**

3 **OPTICAL**

4 **USB** (รองรับ MP3 หรือ FLAC)


5 **HDMI TO TV(EARC)**

6 การจัดวางระบบ

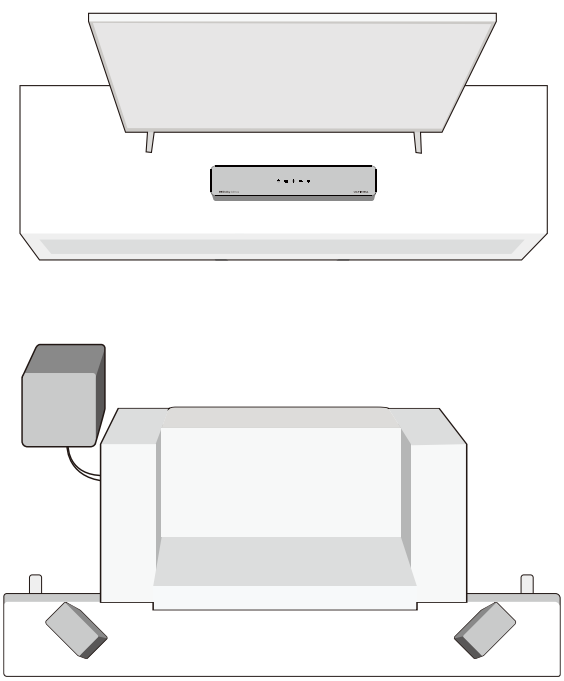

หมายเหตุ: ติดตั้งระดับหู


7 การติดตั้งผนัง

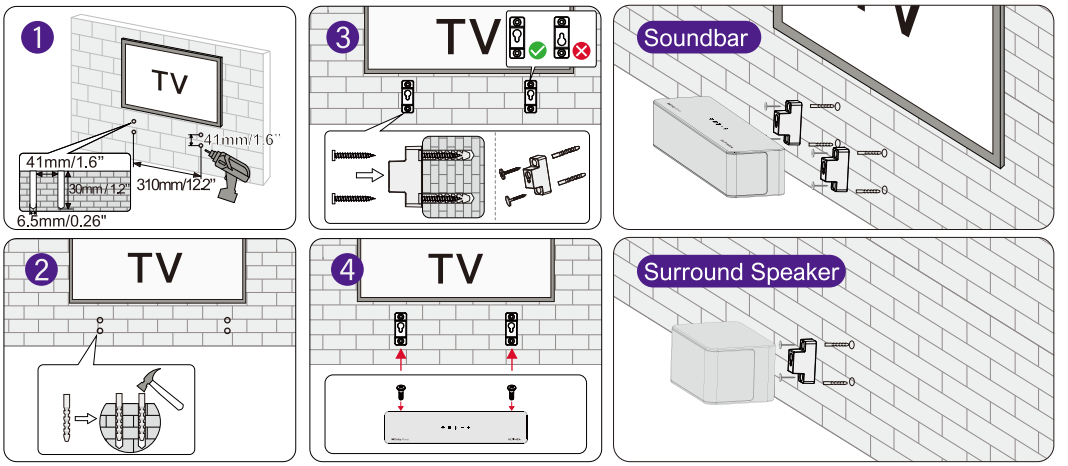


หมายเหตุ: ขายึดติดผนังที่ใช้สำหรับลำโพงเซอร์ราวด์นั้นเหมือนกับที่ใช้สำหรับลำโพงหลัก ดังนั้นระยะห่างของรูแนวตั้งจึงเท่ากับของซาวด์บาร์ และวิธีการติดตั้งก็เหมือนกัน

8 เชื่อมต่อและเปิดเครื่อง


1 เชื่อมต่อซาวด์บาร์เข้ากับแหล่งจ่ายไฟ

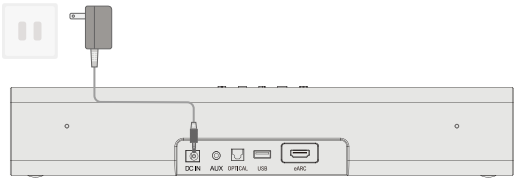


2 เชื่อมต่อซับวูฟเฟอร์เข้ากับแหล่งจ่ายไฟ



3 เชื่อมต่อซับวูฟเฟอร์และลำโพงเซอร์ราวด์โดยใช้สายลำโพงเซอร์ราวด์
ลำโพงเซอร์ราวด์แชทเทลไลท์ทางด้านขวาจะมีอินเทอร์เฟซสีแดง ในขณะที่ลำโพงเซอร์ราวด์แชทเทลไลท์ทางด้านซ้ายจะมีอินเทอร์เฟซสีขาว

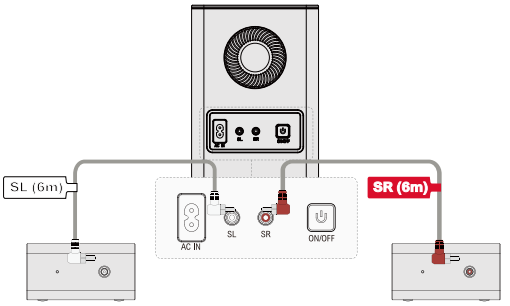


4 ใส่ถ่านในรีโมต
หมายเหตุ: แนะนำถ่านอัลคาไลน์
ไม่แนะนำถ่านชาร์จ




9 เชื่อมต่อทีวีผ่าน HDMI eARC

1. ต่อสาย HDMI เข้าพอร์ต eARC/ARC ด้านหลังทีวี
2. ต่ออีกด้านเข้าพอร์ต eARC ของซาวด์บาร์

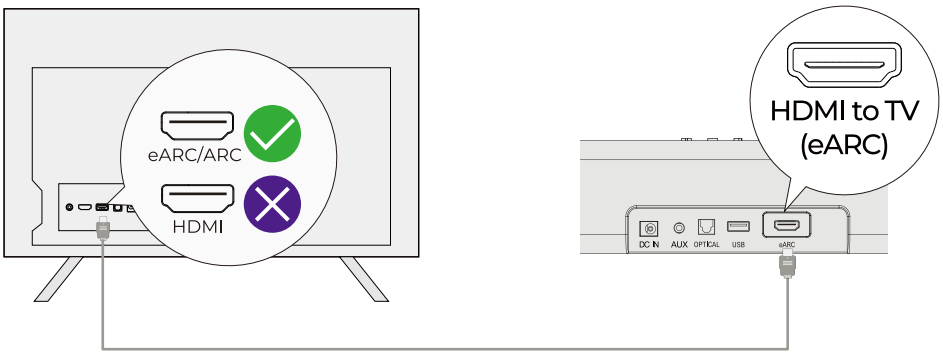

3. กดปุ่ม "Source" บน Soundbar หรือรีโมทคอนโทรลเพื่อเลือกอินพุต "eARC"

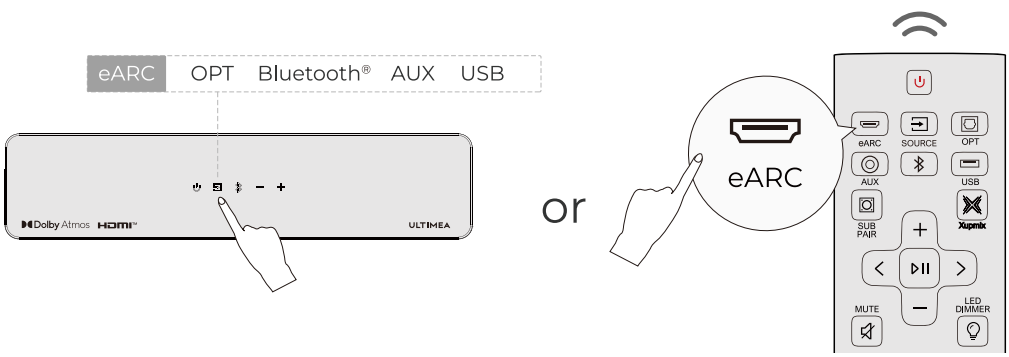

หมายเหตุ: ตรวจสอบให้แน่ใจว่าพอร์ต HDMI ของทีวีของคุณรองรับ eARC มิฉะนั้นสัญญาณเสียง Dolby Atmos จะไม่สามารถส่งได้


Dolby Atmos: หากคุณกำลังรับชมเนื้อหาในรูปแบบ Dolby Atmos ให้ตั้งค่าการส่งออกเสียงของทีวีของคุณเป็น «Pass Through»
การตั้งค่าทีวี > หน้าแรก > การตั้งค่า > เสียง > การส่งออกเสียงดิจิทัล > Pass Through

HDMI eARC (Enhanced Audio Return Channel) เป็นเวอร์ชันที่อัปเกรดของ ARC ที่รองรับรูปแบบเสียงคุณภาพสูง เช่น Dolby Atmos

หมายเหตุ: เปิดใช้งานฟังก์ชัน “CEC” บนทีวีของคุณ เมื่อเชื่อมต่อ eARC แล้ว รีโมททีวีของคุณสามารถควบคุมทั้ง Soundbar และทีวีพร้อมกันได้:
(1) เปิดเครื่อง / สแตนด์บาย
(2) ปรับระดับเสียง


10 เชื่อมต่อทีวีด้วยสายออปติคอล

1. ตรวจสอบให้แน่ใจว่าทีวีของคุณมีพอร์ต OPTICAL OUT ใช้สายสัญญาณเสียงออปติคัลเชื่อมต่อพอร์ต OPTICAL OUT ของทีวีเข้ากับพอร์ต OPTICAL IN ของซาวด์บาร์

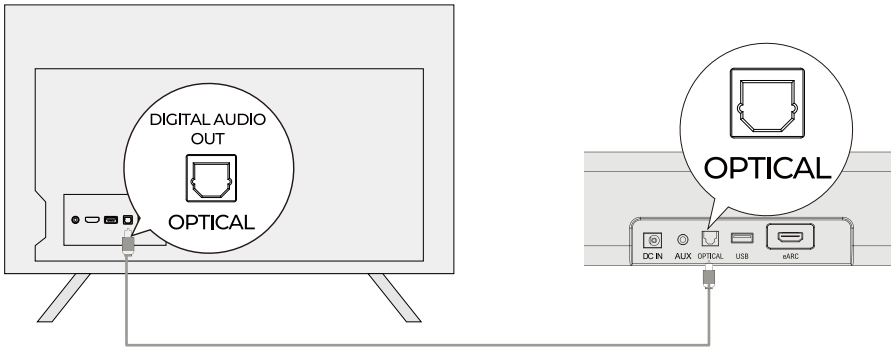


2. ตรวจสอบให้แน่ใจว่าเสียบหัวต่อสายออปติคัลอย่างถูกต้องตามภาพประกอบ ห้ามเสียบหัวต่อกลับด้าน เพราะอาจทำให้พอร์ตออปติคัลเสียหายได้

3. การตั้งค่า TV > Home > Sound > Digital Audio Output > PCM

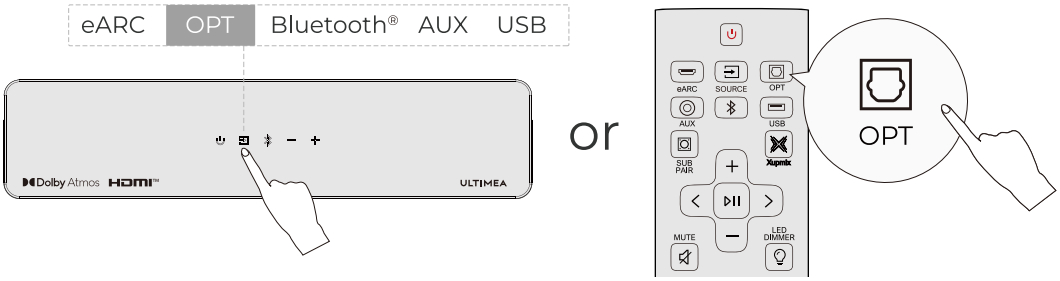

หมายเหตุ: หากเสียงกำลังเล่นผ่านลำโพงในตัวของทีวี ให้ปิดเสียงทีวีหรือลดระดับเสียงลงให้ต่ำที่สุด
การเชื่อมต่อผ่านสายออปติคัลไม่รองรับ Dolby Atmos เพื่อประสบการณ์ Dolby Atmos ที่ดีที่สุด ให้ใช้การเชื่อมต่อ HDMI eARC

11 เชื่อมต่อ BLUETOOTH®

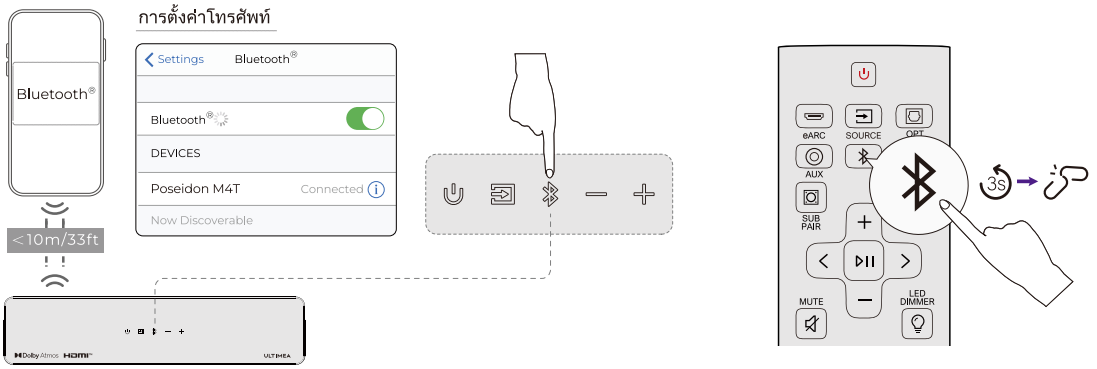


1. กดปุ่ม “ ” บนซาวด์บาร์หรือรีโมตเพื่อเข้าสู่โหมดจับคู่ Bluetooth®

2. ไปที่การตั้งค่า Bluetooth® บนโทรศัพท์ของคุณ ค้นหาและเลือก “Poseidon M4T” เพื่อเชื่อมต่อกับซาวด์บาร์

3. หมายเหตุ: หากซาวด์บาร์อยู่ในโหมด Bluetooth® และเชื่อมต่อกับอุปกรณ์อยู่แล้ว ให้กดปุ่ม “ ” ค้างไว้ 3 วินาที เพื่อตัดการเชื่อมต่อกับอุปกรณ์ปัจจุบัน จากนั้นเลือกซาวด์บาร์ด้วยตนเองบนโทรศัพท์ คอมพิวเตอร์ หรือทีวี เพื่อสร้างการเชื่อมต่อ Bluetooth® ใหม่

12 จับคู่ซับวูฟเฟอร์ใหม่

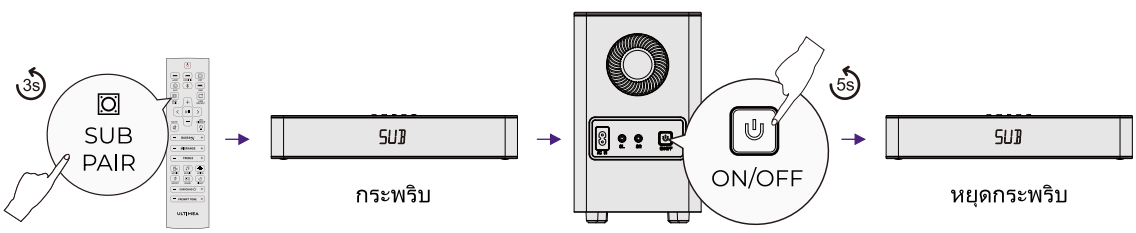


โดยปกติซาวด์บาร์และซับวูฟเฟอร์จะจับคู่มาแล้ว
หากการเชื่อมต่อขาดหาย ให้ทำตามขั้นตอนด้านล่าง

1. กดปุ่ม “SUB PAIR” ค้างไว้ 3 วินาที
   หน้าจอแสดง “SUB” กระพริบเพื่อแสดงโหมดจับคู่
2. กดปุ่มจับคู่ด้านหลังซับวูฟเฟอร์ค้างไว้ 5 วินาที
3. เมื่อจับคู่สำเร็จ หน้าจอจะหยุดกระพริบและไฟติดค้าง

13 คืนค่าโรงงาน

กดปุ่ม MUTE ค้างไว้ 5 วินาทีเพื่อคืนค่าโรงงาน

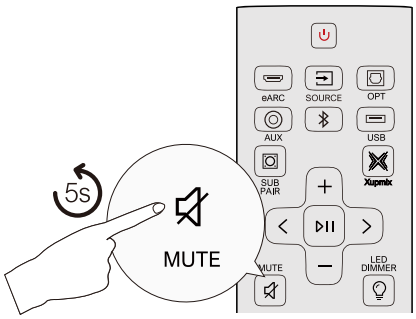


14 ปรับระดับเสียงแจ้งเตือน


Download Ultimea App

Available on the App Store

GET IT ON Google Play

ULTIMEA



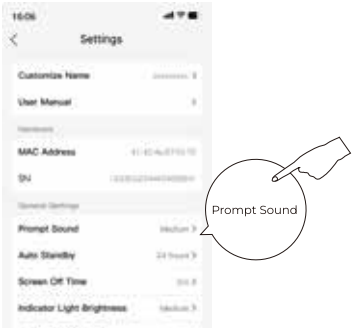

หากเสียงแจ้งเตือนดังเกินไป สามารถปรับผ่านแอป ULTIMEA

1. สแกน QR code เพื่อดาวน์โหลดแอป ULTIMEA แล้วเพิ่มซาวด์บาร์
2. เปิดหน้ารายละเอียดอุปกรณ์ แตะการตั้งค่า แล้วเลือก “Prompt Sound” เพื่อปรับระดับ

Model Number	U2522
Power Supply	DC 18V 3A (Soundbar) / AC 100~240V (Subwoofer)
Soundbar Drivers	Soundbar: 2.25" × 3, Surround: 2.25" × 2, Subwoofer: 5.25"
Auto Standby	The soundbar will turn to standby mode if there is no audio signal for 15 minutes. You can set the standby time in the App
Standby Power	<0.5W
Operating Temperature	-10°C – 40°C / 14°F – 104°F
Bluetooth® Version	5.3

Soundbar	400 x 70x 90 mm/15.7" x 2.8" x 3.5"
Subwoofer	155x244x215mm/6.1"x9.6"×8.5"
Surround	135x70x90mm/5.3"x2.8"x3.5"
Packaging	328x440x190mm/12.9"×17.3" x 7.5"
Packaging Weight	6.35 kg /14 lbs

USB Output	5V 500mA
Operating Altitude	2000 meters above sea level
Wall Mount Screw	4 × 32 mm / 0.16" × 1.26"
Bracket Screws Diameter	3 mm / 0.12"
Remote Control Battery Type	2 × AAA (NOT INCLUDED)
Notice: Risk of fire or explosion if the battery is replaced by an incorrect type.	

PROPER DISPOSAL INSTRUCTIONS



This mark shown on the product or its packaging, indicates that this product should not be disposed of with other household waste at the end of its working life. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources.

For indoor use only



This symbol indicates that the product is intended for indoor use only.

Class II equipment



This symbol indicates that the product is Class II equipment.

Waste Electrical & Electronic Equipment

Household user should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take this item for environmentally safe recycling.
Business users should contact their suppliers and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.

WIRELESS FREQUENCY RANGE AND WIRELESS OUTPUT POWER:

Frequency: 2.402GHz-2.48GHz
The Max. transmit power (Applies only to the EU): 10 dBm

FCC REGULATORY COMPLIANCE

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
This device complies with Part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) This device may not cause harmful interference.
(2) This device must accept any interference received, including interference that may cause undesired operation.
NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.
However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

ISED WARNINGS

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

(1) This device may not cause interference.
(2) This device must accept any interference, including interference that may cause undesired operation of the device.
L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux
CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence.
L'exploitation est autorisée aux deux conditions suivantes :
1) L'appareil ne doit pas produire de brouillage;
2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.
3) The device meets the exemption from the routine evaluation limits in issue6 of RSS 102 and compliance with RSS-102 RF exposure, users can obtain Canadian information on RF exposure and compliance.
Le dispositif rencontre l'exemption des limites courantes d'évaluation dans la numéro 6 de RSS 102 etla conformité à l'exposition de RSS-102 rf, utilisateurs peut obtenir l'information canadienne surl'exposition et la conformité de rf.
This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.
Cet émetteur ne doit pas être Co-placé ou ne fonctionnant en même temps qu'aucune autre antenne ouémetteur. Cet équipement devrait être installé et actionné avec une distance minimum de 20 centimètres entre le radiateur et votre corps.

Wireless Capability Description:

The subwoofer is equipped with a wireless signal reception module, enabling it to receive audio signals from the main device for playback. This device only supports wireless signal reception and cannot relay or forward signals.
The two surround speakers in the system are designed for wired connection and do not have the ability to transmit or receive wireless signals.
The remote control uses infrared (IR) technology for device control and does not support any other wireless signal transmission or reception capabilities.

⚠ **CA WARNING:** Can expose you to BPA, a carcinogen, and BPA, a reproductive. toxicant. See www.P65Warnings.ca.gov.

CE WARNINGS

1) Do not install this equipment in a confined or building-in space such as a book case or similar unit, and remain a well ventilation conditions. The ventilation should not be impeded by covering the ventilation openings with items such as newspaper, table-cloths, curtains etc.
2) WARNING: To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture. The apparatus shall not be exposed to dripping or splashing and that objects filled with liquids, such as vases, shall not be placed on apparatus.
3) WARNING: The adapter plug is used as disconnect device, the disconnect device shall remain readily operable.
4) Frequency: 2.402GHz-2.48GHz
5) The Max. transmit power: 10 dBm

EU Declaration of Conformity

We (Manufacturer is responsible for this declaration)
Ultimea Technology (Shenzhen) Limited
(Company name)

9th Floor, Building A, Shenzhen Industrial Software Park,
Bantian Street, Longgang District, Shenzhen, China 518000
(Company address)

Declare under our sole responsibility that the product
Trade Mark: ULTIMEA
Product Name: Poseidon M4T 5.1 Channel Dolby Atmos Soundbar
Model No.: U2522

The product to which this declaration relates is in conformity with the essential requirements set out in the Council Directive on the Approximation of the laws of the Member States relating to the Radio Equipment Directive (2014/53/EU), the Restriction of Hazardous Substances Directive (2011/65/EU), the Electromagnetic Compatibility Directive (2014/30/EU), and the Low Voltage Directive (2014/35/EU). The product is responsible for affixing the CE marking, and the following standards were applied:

EN 55032:2015/A1:2020

EN 55035:2017/A11:2020

EN IEC 61000-3-2:2019/A1:2021

EN 61000-3-3:2013/A2:2021

ETSI EN 301 489-1 V2.2.3 (2019-11)

ETSI EN 301 489-17 V3.3.1 (2024-09)

ETSI EN 300 328 V2.2.2 (2019-07)

EN 50663: 2017

EN IEC 62368-1:2020+A11:2020

IEC 62321-3-1:2013

IEC 62321-4:2013+A1:2017

IEC 62321-5:2013

IEC 62321-6:2015

IEC 62321-7-1:2015

IEC 62321-7-2:2017

IEC 62321-8:2017

Full Name: Yoyo.Yu
Position: Approbation Manager

Signature: 

Place/Date: Shenzhen, China / Sep. 13-2024

Trade Marks:

Dolby, Dolby Atmos, and the double-D symbol are registered trademarks of Dolby Laboratories Licensing Corporation. Manufactured under license from Dolby Laboratories. Confidential unpublished works. Copyright © 2012–2024 Dolby Laboratories. All rights reserved.

HIGH-DEFINITION MULTIMEDIA INTERFACE

The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Ultimea Technology (Shenzhen) Limited. is under license. Other trademarks and trade names are those of their respective owners.

General specification (English):

Model: U2522
Sound system: 5.1 channel
Power supply: 18V 3A DC(Soundbar);
100-240V~50/60Hz AC (Subwoofer)
Drivers: 2.25"×3(Soundbar) + 2.25"×2 (Surround)
+5.25"(Subwoofer)
Standby Power: <0.5W
USB Output: 5V 500mA DC
Operating Temperature: -10°C-40°C/14°F-104°F
Operating Altitude: 2000 meters above sea level
Wall Mount Screw: 4 × 32 mm / 0.16" × 1.26"
Bracket Screws Diameter: 3 mm / 0.12"
Remote Control Battery Type: 2 x AAA (NOT INCLUDED)
Notice: Risk of fire or explosion if the battery is replaced by an incorrect type.

Dimensions

・Soundbar dimensions (W x H x D):
400 x 70 x 90 mm / 15.7" x 2.8" x 3.5"
・Subwoofer dimensions (W x H x D):
155 x 244 x 215 mm / 6.1" x 9.6" x 8.5"
・Surround dimensions (W x H x D):
135 x 70 x 90 mm / 5.3" x 2.8" x 3.5"
・Packaging dimensions (W x H x D):
328 x 440 x 190 mm / 12.9" x 17.3" x 7.5"
・Packaging Weight: 6.35 kg / 14 lbs

Power Consumption and Wireless Connection Setup Guide

1. Information on power consumption
This equipment complies with European COMMISSION REGULATION (EU) 2023/826.
・Off: N/A
・Standby (when all wireless connections are deactivated): < 0.5 W
・Networked standby for Soundbar: < 2.0 W
*The duration for the device to enter standby mode can be set in the app. Changing this setting may lead to a significant increase in energy consumption, negatively impacting the environment.
2. The period of time after which the power management function switches the equipment automatically into:

Off	N/A	
Standby	When the soundbar is idle (with no playback or operation) and neither Bluetooth® nor the app is connected.	Switched to standby mode after 15 minutes.
Networked standby	When Bluetooth® or the app is connected.	Switched to networked standby mode after 15 minutes of inactivity in operational mode.

3. If this equipment has the wireless network connections:
How to activate wireless network connections:
・Set up the equipment properly;
・Switch into wireless mode (Bluetooth®);
・Connect with energy using products (e.g. players/ game consoles/ STB (Set-Top Boxes)/ phones/ tablets /PCs). How to deactivate wireless network connections: ・Switch to another channel besides Bluetooth®;
・Then long press on the remote control for more than 3 seconds.

For other languages of the above content (DE, FR, ES, IT, PT, NL, PL, SV, TR, JP, CN, TC, KO, ID, TH, AR), please scan the QR code

IMPORTANT SAFETY INSTRUCTIONS (English):

1.Please read and retain this manual. Follow all warnings and operate according to the instructions.
2.Do not use the device near water sources, in damp environments, or in the rain. Avoid splashing liquids or placing objects containing liquids (such as vases) on the device.
3.Clean only with a dry cloth. Do not use liquid cleaners.
4.Do not block ventilation openings or install the device in an enclosed space. Ensure proper ventilation and install according to the manufacturer's instructions.
5.Do not install the device near heat sources such as radiators, stoves, or amplifiers. Do not cover the ventilation openings with items such as newspapers or curtains.
6.Use only attachments, stands, or accessories specified by the manufacturer. When using a device with wheels, move with care to avoid tipping.
7.Protect the power cord from being pinched, stepped on, or bent, especially at plugs, outlets, and the point where it exits the device.
8.Do not alter the polarized or grounding-type plug. If the plug does not fit into the outlet, consult an electrician to replace the outlet.
9.Unplug the device during lightning storms or when unused for long periods. To fully disconnect power, unplug the device from the wall outlet and ensure the plug is accessible.
10.Do not place any open flame sources (such as lit candles) on or near the device.
11.Do not attempt to open the device. High voltage inside may be fatal. There are no user-serviceable parts inside. All servicing must be performed by qualified personnel.
12.The installation height of the device must not exceed 2 meters.

Scan QR for safety info / QR-Code für Infos scannen / Scanner le QR pour infos / Escanee QR para info / Scansiona il QR per info / Leia o QR para info / Scan QR-code voor info / Zeskanuj kod QR / Skanna QR för info / QR kodu tara / QRコードをスキャン / 扫码查看安全信息 / 掃碼查看安全資訊 / QR 코드 스캔 / Pindai QR untuk informasi keselamatan / สแกน QR เพื่อดูข้อมูลความปลอดภัย / امسح رمز QR لمعلومات السلامة

ULTIMEA

Product Name: Poseidon M4T 5.1 Channel Dolby Atmos Soundbar
Model No.: U2522
HVIN: U2522

EC REP

Ultimea GmbH
Buchenring 57, 22359 Hamburg, Germany

UK REP

EVATOST CONSULTING LTD
Office 101 32 Threadneedle Street, London,
United Kingdom, EC2R 8AY

© Ultimea Inc. All rights reserved, registered in the United States and other countries.
801 S. Dupont Ave., Ste G, Ontario, CA, 91761, USA

Made in China
Manufacturer: Ultimea Technology (Shenzhen) Limited
Address: 9th Floor, Building A, Shenzhen Industrial Software Park, Bantian Street, Longgang District, Shenzhen, China 518000

Manufacturer Contact Information:

+1 888-598-8875 (US)
Mon-Fri 9am-5pm (PST)

+49 89-628-25828 (EU)
Mon-Fri 9am-5pm (CET)

support@ultimea.com

support.ultimea.com

If you need our support, kindly reach out to our service team.
We are always glad to help.

Download Ultimea App

GET IT ON Google Play

Available on the App Store

ULTIMEA

Search for “ULTIMEA” on social media.

RoHS

FR
Cet appareil, ses accessoires, et cordons se recyclent
REPRISE À LA LIVRAISON
OU
À DÉPOSER EN MAGASIN
OU
À DÉPOSER EN DÉCHÈTERIE
Points de collecte sur www.uefairedemesdechets.fr

Warranty Extension Plan

Regardless of where you purchased your Ultimea product,
you can easily opt for this extended warranty.
Scan to check out our extended warranty options.