ULTIMEA

Dolby Atmos

HDMI
HIGH-DEFINITION MULTIMEDIA INTERFACE

Bluetooth®



사용자 설명서


Poseidon M4T


모델 번호: U2522
5.1채널 Dolby Atmos 사운드바

1 중요 안전 지침


- 1.이 지침을 읽고 잘 보관하십시오. 모든 경고를 따르고 지침에 따라 작동하십시오.
- 2.물 근처, 습한 환경 또는 비가 오는 곳에서 장치를 사용하지 마십시오. 장치 위에 액체를 흘리거나 액체가 들어 있는 물건(예: 꽃병)을 올려놓지 마십시오.
- 3.마른 천으로만 청소하십시오. 액체 세제를 사용하지 마십시오.
- 4.환기구를 막거나 장치를 밀폐된 공간에 설치하지 마십시오. 적절한 환기를 확보하고 제조업체의 지침에 따라 장치를 설치하십시오.
- 5.라디에이터, 스토브, 증폭기 또는 열을 발생시키는 다른 장치와 같은 열원 근처에 장치를 설치하지 마십시오. 신문이나 커튼 등으로 환기구를 덮지 마십시오.
- 6.제조업체가 지정한 부속품, 스탠드 또는 액세서리만 사용하십시오. 바퀴가 달린 장비를 사용할 때는 이동 시 넘어지지 않도록 주의하십시오.
- 7.전원 코드가 밟히거나 끼이거나 구부러지지 않도록 보호하십시오. 특히 플러그, 콘센트 및 장치에서 나오는 부분에 주의하십시오.
- 8.플러그의 극성 또는 접지 특성을 변경하지 마십시오. 플러그가 콘센트에 맞지 않으면 전기 기술자에게 문의하여 콘센트를 교체하십시오.
- 9.낙뢰가 있을 때나 장시간 사용하지 않을 때는 전원 코드를 뽑으십시오.
- 10.장치 위에 촛불과 같은 개방형 화염을 두지 마십시오.
- 11.장치를 열려고 시도하지 마십시오. 내부의 고전압은 감전 또는 사망을 초래할 수 있습니다. 모든 수리는 자격을 갖춘 전문가가 수행해야 합니다.
- 12.장치의 설치 높이는 2미터를 초과해서는 안 됩니다.

2 구성품 목록

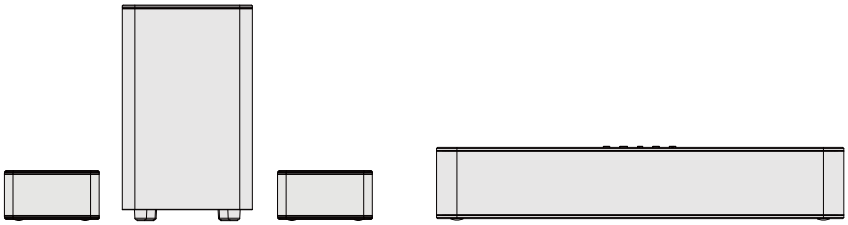





사운드바 전원
어댑터(2m/78")




서브우퍼 전원
코드(2m/78")



서라운드 연결
케이블(6m/236")




HDMI 케이블(1.5m/59")




디지털 광케이블(1.5m/59")




리모컨



브래킷 나사




벽걸이 브래킷



벽면 확장 앵커

3 사운드바 컨트롤

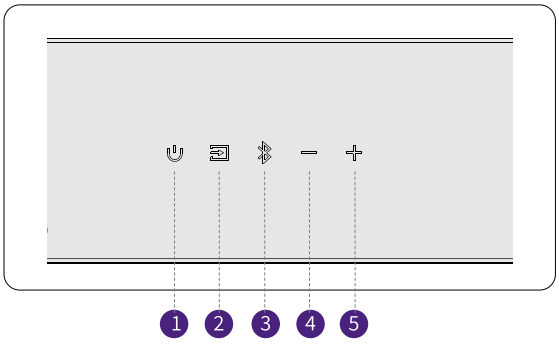

제어 패널

❶ “⏻”: **전원 버튼**
눌러서 전원 켜기/끄기

❷ “⏍”: **입력 소스**
눌러 전환: eARC - OPT(OPTICAL) - Bluetooth® - AUX - USB.

❸ “ᛒ”: **Bluetooth®**
눌러 블루투스 모드, 자동 페어링
3초 길게 눌러 재페어링 (ID: Poseidon M4T)

❹ “−”: **볼륨 −**

❺ “+”: **볼륨 +**

4 리모컨

1 “ ”: **전원 버튼**
눌러서 전원 켜기/끄기

2 “ ”: **eARC**
누르면 HDMI eARC 채널로 전환됩니다.

3 “ ”: **SOURCE**
입력 소스 전환

4 “ ”: **OPT**
누르면 OPTICAL 채널로 전환됩니다.

5 “ ”: **AUX**
누르면 AUX 채널로 전환됩니다.

6 “ ”: **Bluetooth®**
눌러 블루투스 채널로 전환

7 “ ”: **USB**
누르면 USB 채널로 전환됩니다.

8 “ ”: **SUB PAIR**
버튼을 3초 동안 길게 눌러 사운드바를 서브우퍼와 페어링할 준비가 된 상태로 전환하십시오.

9 “ ”: **XUPMIX**
기본 설정은 "on"이며, 6가지 사운드 효과 모드의 활성화 및 비활성화를 통합적으로 제어할 수 있습니다.
Xupmix on: 서라운드 채널 사운드는 알고리즘으로 처리된 풍부한 다채널 신호에 의해 제공되어 더욱 몰입감 있는 청각 경험을 선사합니다.
Xupmix off: 서라운드 채널 사운드는 알고리즘을 사용하여 좌우 채널 신호에 따라 최적화되어 더 넓은 사운드 필드 효과를 제공합니다.

10 “ + ”: 볼륨 올림

11 “ — ”:볼륨 내림

12 “ < ”: 이전
Bluetooth®/USB 전용: 이전 트랙

13 “ > ”: 다음
Bluetooth®/USB 전용: 다음 트랙

14 “ ”: 재생 / 일시정지
Bluetooth®/USB 전용

15 “ ”: **MUTE**
음소거. 재설정하려면 5초 동안 길게 누르세요.

16 “ ”: **LED DIMMER**
누르면 디스플레이 밝기를 5단계로 조절할 수 있습니다.
3초 동안 길게 누르면 디스플레이가 꺼집니다.

17 “ BASS ”: **BASSMX**
눌러 베이스 조절

18 “ MIDRANGE ”: **MIDRANGE**
누르면 중음 레벨을 조절할 수 있습니다.

19 “ TREBLE ”: **TREBLE**
누르면 고음 레벨을 조절할 수 있습니다.

20 “ ”: **MOVIE**
누르면 MOVIE 모드로 전환되고 디스플레이에 " E91"가 표시됩니다.


21 “ ”: **MUSIC**
누르면 MUSIC 모드로 전환되고 디스플레이에 " E92"가 표시됩니다.

22 “ ”: **VOICE**
누르면 VOICE 모드로 전환되고 디스플레이에 " E93 "가 표시됩니다.

23 “ ”: **SPORT**
누르면 SPORT 모드로 전환되고 디스플레이에 " E94 "가 표시됩니다.

24 “ ”: **GAME**
누르면 GAME 모드로 전환되고 디스플레이에 " E95 "이 표시됩니다.


25 “ ”: **NIGHT**
누르면 NIGHT 모드로 전환되고 디스플레이에 " E96 "가 표시됩니다.

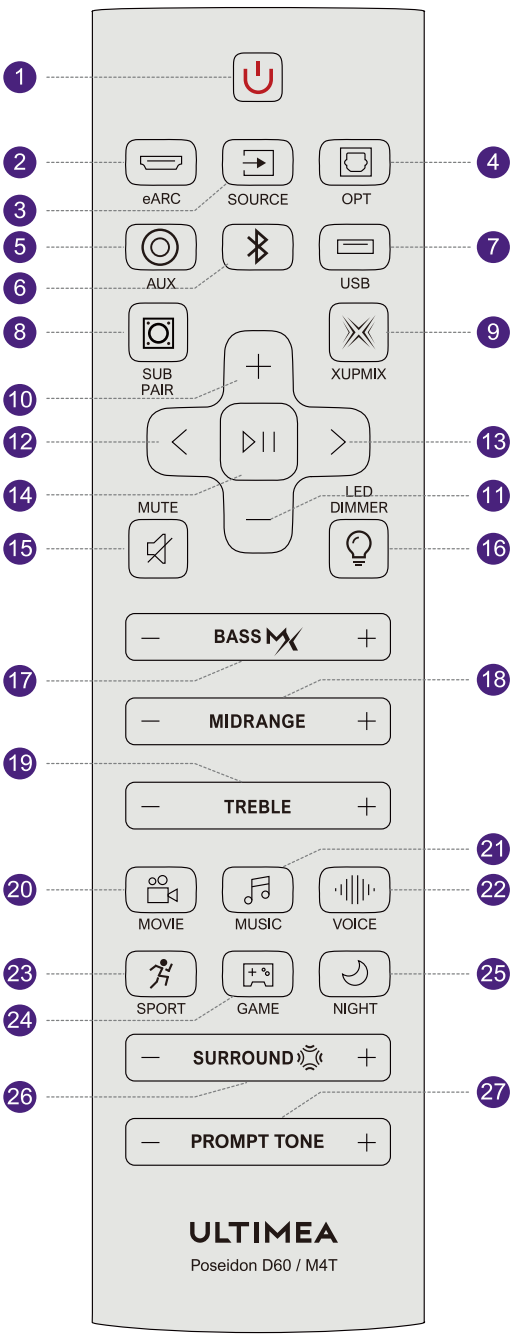

26 “ SURROUND ”: **SURROUND**
누르면 서라운드 사운드 레벨을 조절할 수 있습니다.

27 “ PROMPT TONE ”: **PROMPT TONE**
눌러서 알림음 레벨을 조정하면 디스플레이에 다음과 같이 표시됩니다: “Pt 0”, “Pt 1”, “Pt 2”, “Pt 3”.

5 후면 패널 연결 단자

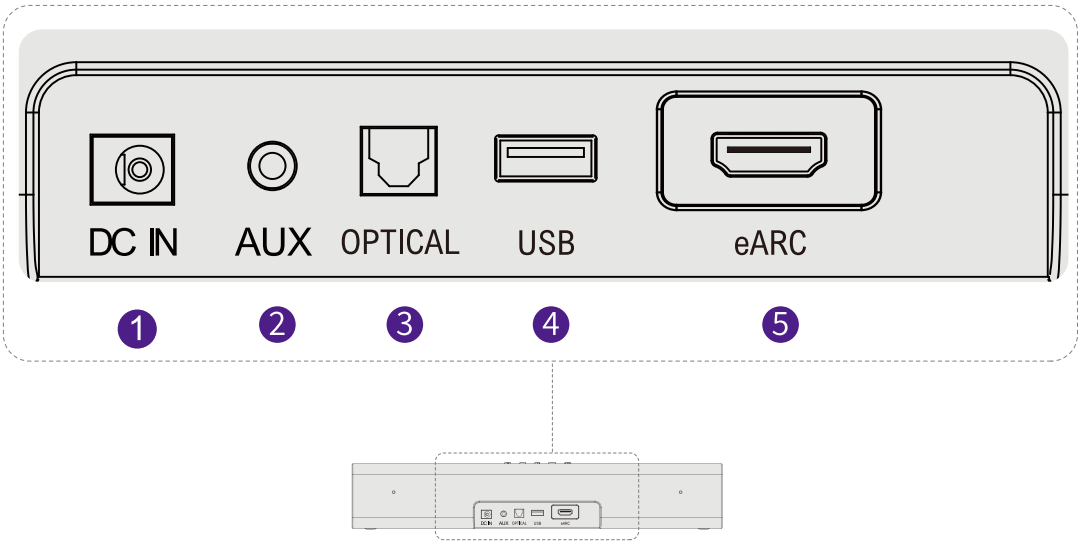

1 **DC IN**


2 **AUX**


3 **OPTICAL**

4 **USB (** MP3 또는 FLAC 지원 **)**

5 **HDMI TO TV(EARC)**


6 시스템 배치

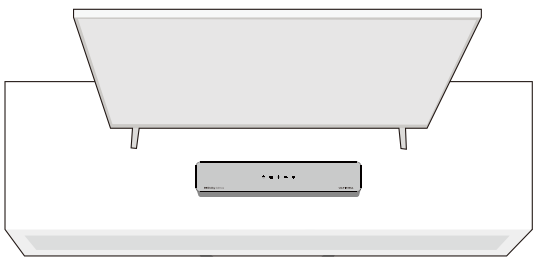

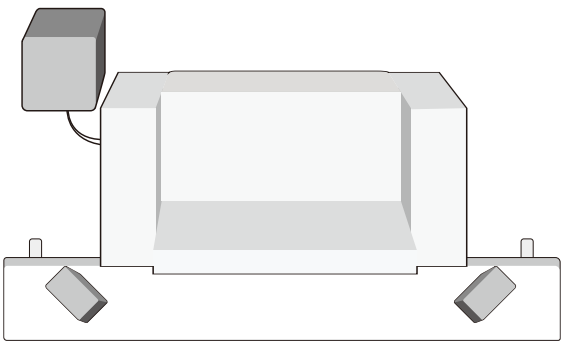

참고: 귀 높이에 설치


7 벽걸이 설치

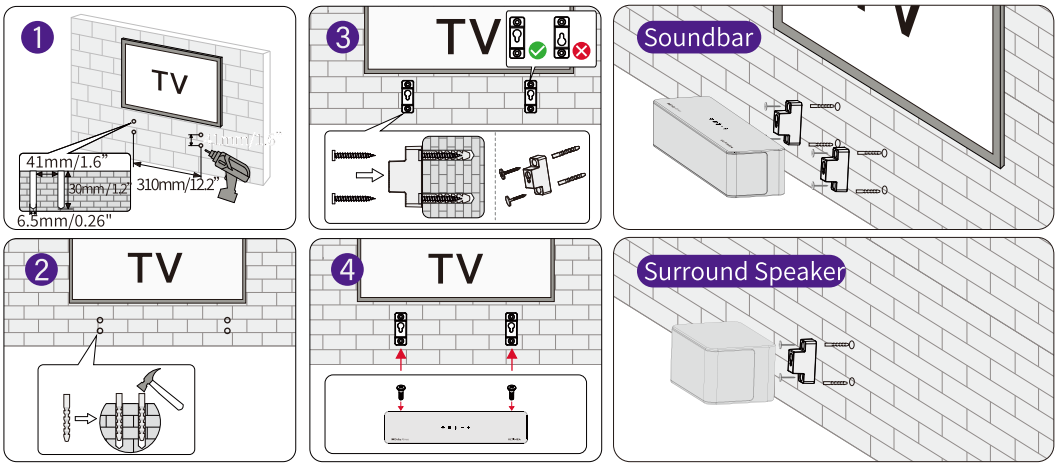


참고: 서라운드 스피커에 사용되는 벽걸이 브래킷은 사운드 스피커의 브래킷과 동일하므로 수직 구멍 간격이 사운드바와 동일하고 설치 방법도 동일합니다.

8 연결 및 전원 켜기


1 사운드바를 전원에 연결합니다.

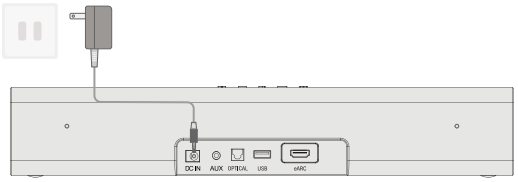


2 서브우퍼를 전원에 연결합니다.



3 서라운드 스피커 케이블을 사용하여 서브우퍼와 서라운드 스피커를 연결하십시오.
오른쪽의 서라운드 위성 스피커에는 빨간색 연결 단자가 있고 왼쪽의 서라운드 위성 스피커에는 흰색 인터페이스가 있습니다.

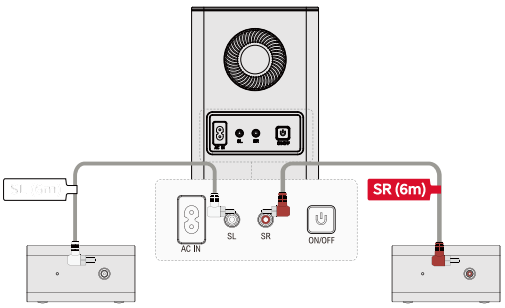


4 리모컨에 배터리 삽입
참고: 알카라인 배터리 권장
충전식 배터리 비권장




9 HDMI eARC로 TV 연결

1 HDMI 케이블 한쪽을 TV eARC/ARC 포트에 연결

2 다른 쪽을 사운드바 eARC 포트에 연결

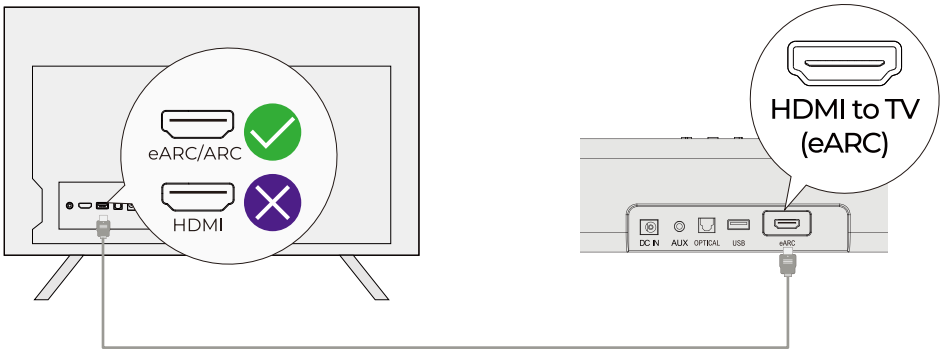

3 사운드바 또는 리모컨의 "Source" 버튼을 눌러 "eARC" 입력을 선택하세요.

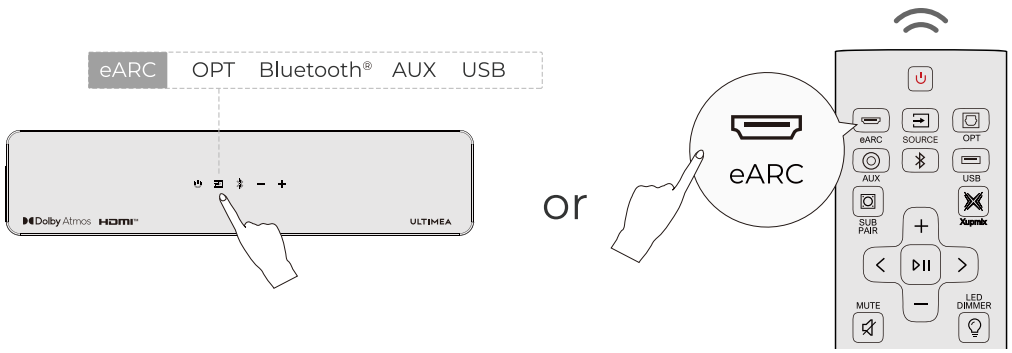


参考: TVの HDMI 포트가 eARC를 지원하는지 확인하십시오. 그렇지 않으면 Dolby Atmos 오디오 신호를 전송할 수 없습니다.
Dolby Atmos: Dolby Atmos 형식의 콘텐츠를 시청 중인 경우 TV의 오디오 출력을 «Pass Through»로 설정하세요.
TV 설정 > 홈 > 설정 > 사운드 > 디지털 오디오 출력 > Pass Through

HDMI eARC(Enhanced Audio Return Channel)는 ARC의 업그레이드 버전으로 Dolby Atmos와 같은 고품질 오디오 형식을 지원합니다.

참고: TV에서 “CEC” 기능을 활성화하세요. eARC가 연결되면 TV 리모컨으로 사운드바와 TV를 동시에 제어할 수 있습니다:
(1) 전원 켜기 / 대기
(2) 볼륨 조정


10 광케이블로 TV 연결

1. TV에 OPTICAL OUT 단자가 있는지 확인하세요. 광케이블을 사용하여 TV의 OPTICAL OUT 단자와 사운드바의 OPTICAL IN 단자를 연결합니다.

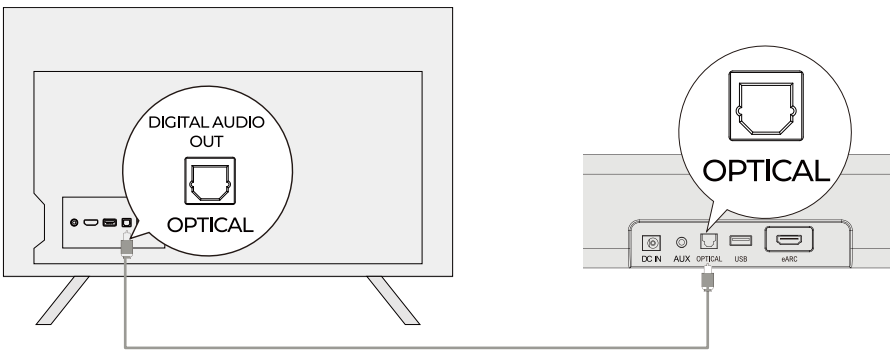


2. 그림과 같이 광케이블 커넥터가 올바른 방향으로 삽입되었는지 확인하세요. 커넥터를 거꾸로 삽입하면 광단자가 손상될 수 있으므로 주의하세요.

3. TV 설정 > 홈 > 설정 > 사운드 > 디지털 오디오 출력 > PCM

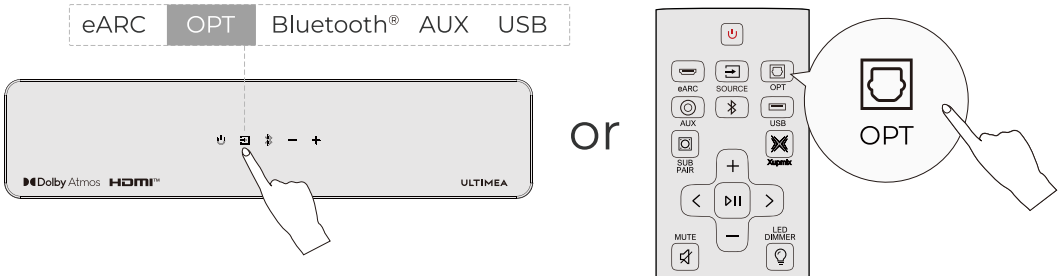

참고: TV 내장 스피커에서 오디오가 재생 중인 경우 TV를 음소거하거나 볼륨을 최소로 낮추세요.
광 포트는 Dolby Atmos를 지원하지 않습니다. 최상의 Dolby Atmos 경험을 위해 HDMI eARC를 사용하세요.

11 블루투스 연결

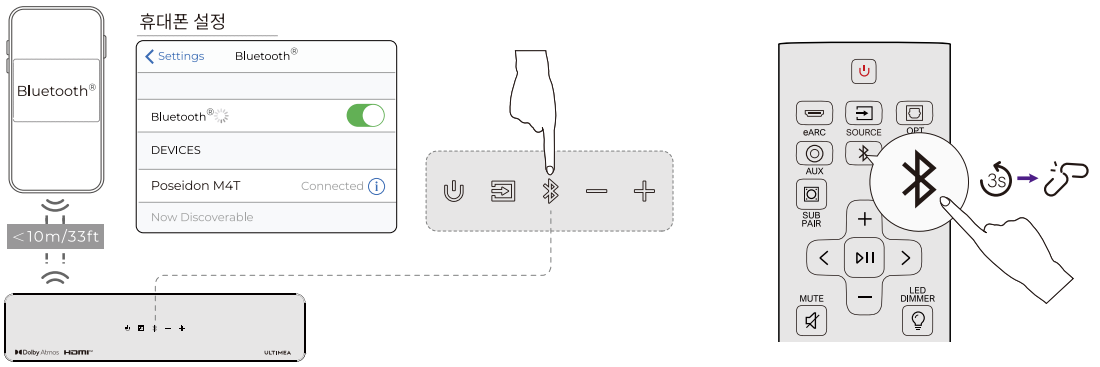


1. 사운드바 또는 리모컨의 " " 버튼을 눌러 블루투스 페어링 모드 진입

2. 휴대폰의 Bluetooth® 설정으로 이동하여 "Poseidon M4T"을 찾아 선택하면 사운드바에 연결됩니다.

3. 참고: 사운드바가 이미 Bluetooth® 모드에서 기기에 연결되어 있는 경우, " " 버튼을 3초 동안 길게 눌러 현재 연결된 기기의 연결을 해제합니다. 그런 다음 휴대폰, PC 또는 TV에서 사운드바를 수동으로 선택하여 새로운 Bluetooth® 연결을 설정하세요.

12 서브우퍼 재페어링

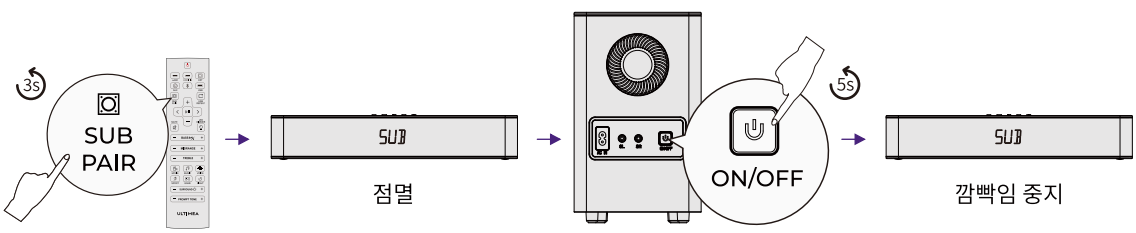

일반적으로 사운드바와 서브우퍼는 페어링됨
연결이 끊어지면 아래 단계를 따르십시오


1. 리모컨의 “SUB PAIR” 버튼을 3초간 누르세요
   본체 디스플레이에 “SUB”가 점멸되어 페어링 모드 표시

2. 서브우퍼 후면의 페어링 버튼을 5초간 누르세요

3. 페어링이 완료되면 사운드바 디스플레이의 깜빡임이 멈추고 서브우퍼의 표시등이 계속 켜져 있습니다.

13 공장 초기화

MUTE 버튼을 5초간 길게 눌러 공장 초기화

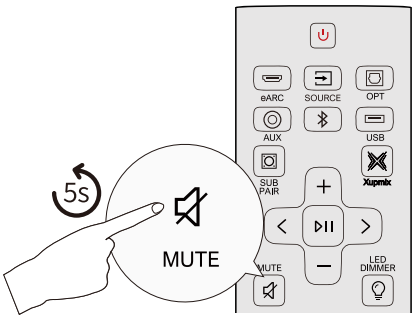


14 안내음 볼륨 조절


Download Ultimea App

Available on the App Store

GET IT ON Google Play

ULTIMEA



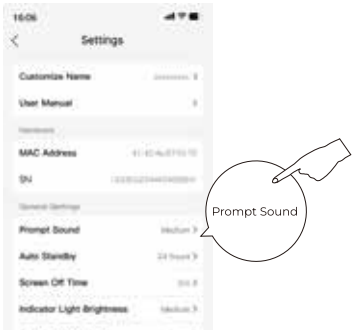

안내음이 너무 크면 ULTIMEA 앱에서 조절할 수 있습니다

1. QR 코드를 스캔해 ULTIMEA 앱을 다운로드하고 사운드바를 추가하세요
2. 기기 상세 페이지에서 설정을 눌러 “Prompt Sound ” 을 선택해 조절

15 제품 사양

Model Number	U2522
Power Supply	DC 18V 3A (Soundbar) / AC 100~240V (Subwoofer)
Soundbar Drivers	Soundbar: 2.25" × 3, Surround: 2.25" × 2, Subwoofer: 5.25"
Auto Standby	The soundbar will turn to standby mode if there is no audio signal for 15 minutes. You can set the standby time in the App
Standby Power	<0.5W
Operating Temperature	-10°C – 40°C / 14°F – 104°F
Bluetooth® Version	5.3

Soundbar	400 x 70x 90 mm/15.7" x 2.8" x 3.5"
Subwoofer	155x244x215mm/6.1"x9.6"×8.5"
Surround	135x70x90mm/5.3"x2.8"x3.5"
Packaging	328x440x190mm/12.9"×17.3" x 7.5"
Packaging Weight	6.35 kg /14 lbs

USB Output	5V 500mA
Operating Altitude	2000 meters above sea level
Wall Mount Screw	4 × 32 mm / 0.16" × 1.26"
Bracket Screws Diameter	3 mm / 0.12"
Remote Control Battery Type	2 × AAA (NOT INCLUDED)
Notice: Risk of fire or explosion if the battery is replaced by an incorrect type.	

PROPER DISPOSAL INSTRUCTIONS



This mark shown on the product or its packaging, indicates that this product should not be disposed of with other household waste at the end of its working life. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources.

For indoor use only



This symbol indicates that the product is intended for indoor use only.

Class II equipment



This symbol indicates that the product is Class II equipment.

Waste Electrical & Electronic Equipment

Household user should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take this item for environmentally safe recycling.
Business users should contact their suppliers and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.

WIRELESS FREQUENCY RANGE AND WIRELESS OUTPUT POWER:

Frequency: 2.402GHz-2.48GHz
The Max. transmit power (Applies only to the EU): 10 dBm

FCC REGULATORY COMPLIANCE

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
This device complies with Part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) This device may not cause harmful interference.
(2) This device must accept any interference received, including interference that may cause undesired operation.
NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.
However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

ISED WARNINGS

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

(1) This device may not cause interference.
(2) This device must accept any interference, including interference that may cause undesired operation of the device.
L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux
CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence.
L'exploitation est autorisée aux deux conditions suivantes :
1) L'appareil ne doit pas produire de brouillage;
2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.
3) The device meets the exemption from the routine evaluation limits in issue6 of RSS 102 and compliance with RSS-102 RF exposure, users can obtain Canadian information on RF exposure and compliance.
Le dispositif rencontre l'exemption des limites courantes d'évaluation dans la numéro 6 de RSS 102 etla conformité à l'exposition de RSS-102 rf, utilisateurs peut obtenir l'information canadienne surl'exposition et la conformité de rf.
This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.
Cet émetteur ne doit pas être Co-placé ou ne fonctionnant en même temps qu'aucune autre antenne ouémetteur. Cet équipement devrait être installé et actionné avec une distance minimum de 20 centimètres entre le radiateur et votre corps.

Wireless Capability Description:

The subwoofer is equipped with a wireless signal reception module, enabling it to receive audio signals from the main device for playback. This device only supports wireless signal reception and cannot relay or forward signals.
The two surround speakers in the system are designed for wired connection and do not have the ability to transmit or receive wireless signals.
The remote control uses infrared (IR) technology for device control and does not support any other wireless signal transmission or reception capabilities.

⚠ **CA WARNING:** Can expose you to BPA, a carcinogen, and BPA, a reproductive. toxicant. See www.P65Warnings.ca.gov.

CE WARNINGS

1) Do not install this equipment in a confined or building-in space such as a book case or similar unit, and remain a well ventilation conditions. The ventilation should not be impeded by covering the ventilation openings with items such as newspaper, table-cloths, curtains etc.
2) WARNING: To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture. The apparatus shall not be exposed to dripping or splashing and that objects filled with liquids, such as vases, shall not be placed on apparatus.
3) WARNING: The adapter plug is used as disconnect device, the disconnect device shall remain readily operable.
4) Frequency: 2.402GHz-2.48GHz
5) The Max. transmit power: 10 dBm

EU Declaration of Conformity

We (Manufacturer is responsible for this declaration)
Ultimea Technology (Shenzhen) Limited
(Company name)

9th Floor, Building A, Shenzhen Industrial Software Park, Bantian Street, Longgang District, Shenzhen, China 518000 (Company address)

Declare under our sole responsibility that the product
Trade Mark: ULTIMEA
Product Name: Poseidon M4T 5.1 Channel Dolby Atmos Soundbar
Model No.: U2522

The product to which this declaration relates is in conformity with the essential requirements set out in the Council Directive on the Approximation of the laws of the Member States relating to the Radio Equipment Directive (2014/53/EU), the Restriction of Hazardous Substances Directive (2011/65/EU), the Electromagnetic Compatibility Directive (2014/30/EU), and the Low Voltage Directive (2014/35/EU). The product is responsible for affixing the CE marking, and the following standards were applied:

EN 55032:2015/A1:2020

EN 55035:2017/A11:2020

EN IEC 61000-3-2:2019/A1:2021

EN 61000-3-3:2013/A2:2021

ETSI EN 301 489-1 V2.2.3 (2019-11)

ETSI EN 301 489-17 V3.3.1 (2024-09)

ETSI EN 300 328 V2.2.2 (2019-07)

EN 50663: 2017

EN IEC 62368-1:2020+A11:2020

IEC 62321-3-1:2013

IEC 62321-4:2013+A1:2017

IEC 62321-5:2013

IEC 62321-6:2015

IEC 62321-7-1:2015

IEC 62321-7-2:2017

IEC 62321-8:2017

Full Name: Yoyo.Yu
Position: Approbation Manager

Signature: yoyo yu

Place/Date: Shenzhen, China / Sep. 13-2024

Trade Marks:

Dolby Atmos

Dolby, Dolby Atmos, and the double-D symbol are registered trademarks of Dolby Laboratories Licensing Corporation. Manufactured under license from Dolby Laboratories. Confidential unpublished works. Copyright © 2012–2024 Dolby Laboratories. All rights reserved.

HDMI™ HIGH-DEFINITION MULTIMEDIA INTERFACE

The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

Bluetooth®

The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Ultimea Technology (Shenzhen) Limited. is under license. Other trademarks and trade names are those of their respective owners.

General specification (English):

Model: U2522
Sound system: 5.1 channel
Power supply: 18V 3A DC(Soundbar);
100-240V~50/60Hz AC (Subwoofer)
Drivers: 2.25"×3(Soundbar) + 2.25"×2 (Surround)
+5.25"(Subwoofer)
Standby Power: <0.5W
USB Output: 5V 500mA DC
Operating Temperature: -10°C-40°C/14°F-104°F
Operating Altitude: 2000 meters above sea level
Wall Mount Screw: 4 × 32 mm / 0.16" × 1.26"
Bracket Screws Diameter: 3 mm / 0.12"
Remote Control Battery Type: 2 x AAA (NOT INCLUDED)
Notice: Risk of fire or explosion if the battery is replaced by an incorrect type.

Dimensions

・Soundbar dimensions (W x H x D):
400 x 70 x 90 mm / 15.7" x 2.8" x 3.5"
・Subwoofer dimensions (W x H x D):
155 x 244 x 215 mm / 6.1" x 9.6" x 8.5"
・Surround dimensions (W x H x D):
135 x 70 x 90 mm / 5.3" x 2.8" x 3.5"
・Packaging dimensions (W x H x D):
328 x 440 x 190 mm / 12.9" x 17.3" x 7.5"
・Packaging Weight: 6.35 kg / 14 lbs

Power Consumption and Wireless Connection Setup Guide

1. Information on power consumption
This equipment complies with European COMMISSION REGULATION (EU) 2023/826.
・Off: N/A
・Standby (when all wireless connections are deactivated): < 0.5 W
・Networked standby for Soundbar: < 2.0 W
*The duration for the device to enter standby mode can be set in the app. Changing this setting may lead to a significant increase in energy consumption, negatively impacting the environment.
2. The period of time after which the power management function switches the equipment automatically into:

Off	N/A	
Standby	When the soundbar is idle (with no playback or operation) and neither Bluetooth® nor the app is connected.	Switched to standby mode after 15 minutes.
Networked standby	When Bluetooth® or the app is connected.	Switched to networked standby mode after 15 minutes of inactivity in operational mode.

3. If this equipment has the wireless network connections:
How to activate wireless network connections:
・Set up the equipment properly;
・Switch into wireless mode (Bluetooth®);
・Connect with energy using products (e.g. players/ game consoles/ STB (Set-Top Boxes)/ phones/ tablets /PCs). How to deactivate wireless network connections: ・Switch to another channel besides Bluetooth®;
・Then long press on the remote control for more than 3 seconds.

For other languages of the above content
(DE, FR, ES, IT, PT, NL, PL, SV, TR, JP, CN, TC, KO, ID, TH, AR),
please scan the QR code

IMPORTANT SAFETY INSTRUCTIONS (English):

1.Please read and retain this manual. Follow all warnings and operate according to the instructions.
2.Do not use the device near water sources, in damp environments, or in the rain. Avoid splashing liquids or placing objects containing liquids (such as vases) on the device.
3.Clean only with a dry cloth. Do not use liquid cleaners.
4.Do not block ventilation openings or install the device in an enclosed space. Ensure proper ventilation and install according to the manufacturer's instructions.
5.Do not install the device near heat sources such as radiators, stoves, or amplifiers. Do not cover the ventilation openings with items such as newspapers or curtains.
6.Use only attachments, stands, or accessories specified by the manufacturer. When using a device with wheels, move with care to avoid tipping.
7.Protect the power cord from being pinched, stepped on, or bent, especially at plugs, outlets, and the point where it exits the device.
8.Do not alter the polarized or grounding-type plug. If the plug does not fit into the outlet, consult an electrician to replace the outlet.
9.Unplug the device during lightning storms or when unused for long periods. To fully disconnect power, unplug the device from the wall outlet and ensure the plug is accessible.
10.Do not place any open flame sources (such as lit candles) on or near the device.
11.Do not attempt to open the device. High voltage inside may be fatal. There are no user-serviceable parts inside. All servicing must be performed by qualified personnel.
12.The installation height of the device must not exceed 2 meters.

Scan QR for safety info / QR-Code für Infos scannen / Scanner le QR pour infos / Escanee QR para info / Scansiona il QR per info / Leia o QR para info / Scan QR-code voor info / Zeskanuj kod QR / Skanna QR för info / QR kodu tara / QRコードをスキャン / 扫码查看安全信息 / 掃碼查看安全資訊 / QR 코드 스캔 / Pindai QR untuk informasi keselamatan / สแกน QR เพื่อดูข้อมูลความปลอดภัย / امسح رمز QR لمعلومات السلامة

ULTIMEA

Product Name: Poseidon M4T 5.1 Channel Dolby Atmos Soundbar
Model No.: U2522
HVIN: U2522

EC REP
Ultimea GmbH
Buchenring 57, 22359 Hamburg, Germany

UK REP
EVATOST CONSULTING LTD
Office 101 32 Threadneedle Street, London,
United Kingdom, EC2R 8AY

© Ultimea Inc. All rights reserved, registered in the United States and other countries.
801 S. Dupont Ave., Ste G, Ontario, CA, 91761, USA

Made in China
Manufacturer: Ultimea Technology (Shenzhen) Limited
Address: 9th Floor, Building A, Shenzhen Industrial Software Park, Bantian Street, Longgang District, Shenzhen, China 518000

Manufacturer Contact Information:

+1 888-598-8875 (US)
Mon-Fri 9am-5pm (PST)

+49 89-628-25828 (EU)
Mon-Fri 9am-5pm (CET)

support@ultimea.com

support.ultimea.com

If you need our support, kindly reach out to our service team.
We are always glad to help.

Download Ultimea App

GET IT ON Google Play

Available on the App Store

ULTIMEA

Search for “ULTIMEA” on social media.

RoHS

FR Cet appareil, ses accessoires, et cordons se recyclent
REPRISE À LA LIVRAISON OU À DÉPOSER EN MAGASIN OU À DÉPOSER EN DÉCHÈTERIE
Points de collecte sur www.uefairedemesdechets.fr

Warranty Extension Plan

Regardless of where you purchased your Ultimea product, you can easily opt for this extended warranty.
Scan to check out our extended warranty options.