ULTIMEA



# Instrukcja obsługi


## Poseidon M4T


Nr modelu: U2522
Soundbar Dolby Atmos 5.1

## 1 WAŻNE INSTRUKCJE BEZPIECZEŃSTWA


- 1.Przeczytaj i zachowaj te instrukcje. Przestrzegaj wszystkich ostrzeżeń i obsługuj urządzenie zgodnie z instrukcjami.
- 2.Nie używaj urządzenia w pobliżu wody, w wilgotnym środowisku ani na deszczu. Unikaj rozlewania płynów na urządzenie lub umieszczania na nim przedmiotów zawierających płyny (np. wazonów).
- 3.Czyść tylko suchą szmatką. Nie używaj płynnych środków czyszczących.
- 4.Nie blokuj otworów wentylacyjnych ani nie instaluj urządzenia w zamkniętej przestrzeni. Zapewnij odpowiednią wentylację i instaluj urządzenie zgodnie z instrukcjami producenta.
- 5.Nie instaluj urządzenia w pobliżu źródeł ciepła, takich jak grzejniki, piece, wzmacniacze lub inne urządzenia wytwarzające ciepło. Nie zakrywaj otworów wentylacyjnych gazetami ani zasłonami.
- 6.Używaj tylko akcesoriów, stojaków lub uchwytów określonych przez producenta. Podczas korzystania ze sprzętu na kółkach zachowaj ostrożność podczas przemieszczania, aby zapobiec przewróceniu.
- 7.Chroń przewód zasilający przed deptaniem, zgnieceniem lub zagięciem, szczególnie przy wtyczkach, gniazdkach i miejscu wyjścia z urządzenia.
- 8.Nie modyfikuj polaryzacji ani uziemienia wtyczki. Jeśli wtyczka nie pasuje do gniazdka, skonsultuj się z elektrykiem w celu wymiany gniazdka.
- 9.Odłącz przewód zasilający podczas burz lub gdy nie jest używany przez dłuższy czas.
- 10.Nie umieszczaj żadnych źródeł otwartego ognia, takich jak zapalone świece, na urządzeniu.
- 11.Nie próbuj otwierać urządzenia. Wewnątrz panuje wysokie napięcie, które może spowodować porażenie prądem lub śmierć. Wszelkie naprawy muszą być wykonywane przez wykwalifikowany personel.
- 12.Wysokość montażu urządzenia nie może przekraczać 2 metrów.

## 2 LISTA AKCESORIÓW

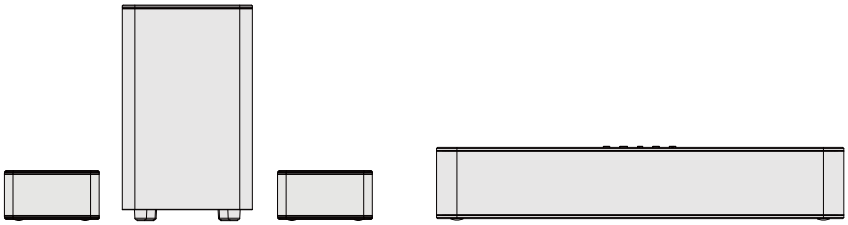





Zasilacz soundbara(2m/78")




Przewód zasilający subwoofera(2m/78")



Przewód połączeniowy surround(6m/236")




Kabel HDMI (1.5m/59")




Cyfrowy kabel optyczny(1.5m/59")




Pilot zdalnego sterowania



Śruba mocująca




Uchwyt ścienny



Kołek rozporowy do ściany

## 3 STEROWANIE SOUNDBAREM

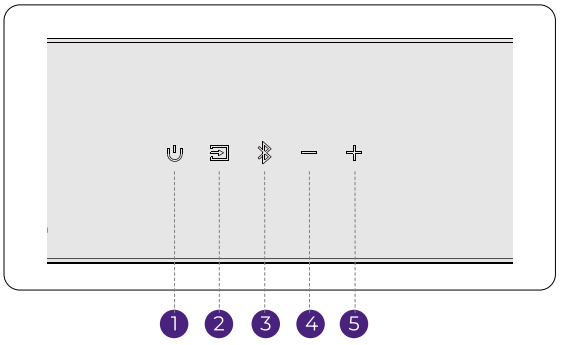


### PANEL STEROWANIA

1. **“⏻”:Przycisk zasilania**
   Naciśnij, aby włączyć / wyłączyć.


2. **“⏏”: Źródło**
   Naciśnij, aby przełączyć: eARC - OPT(OPTICAL) - Bluetooth®- AUX - USB.

3. **“ᛒ”: Bluetooth®**
   Naciśnij, aby przejść do Bluetooth®, automatyczne parowanie.
   Przytrzymaj 3 s, aby sparować nowe urządzenie. (ID: Poseidon M4T)

4. **“−”: Głośność –**


5. **“+”: Głośność +**

# 4 PILOT ZDALNEGO STEROWANIA

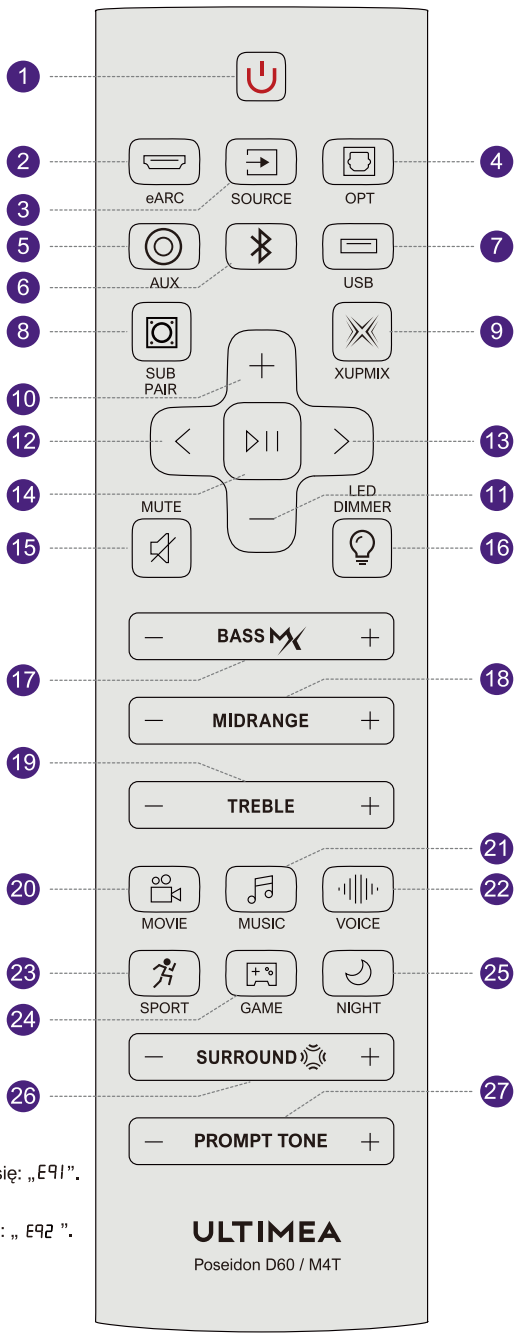



1. “⏻” : **Przycisk zasilania**
   Naciśnij, aby włączyć / wyłączyć.
2. “▭”: **eARC**
   Naciśnij, aby przełączyć na kanał HDMI eARC.
3. “⇥”: **SOURCE**
   Naciśnij, aby zmienić źródło sygnału.
4. “▣”: **OPT**
   Naciśnij, aby przełączyć na kanał OPTYCZNY.
5. “◎”: **AUX**
   Naciśnij, aby przełączyć na kanał AUX.
6. “ᛒ”: **Bluetooth®**
   Naciśnij, aby przełączyć na Bluetooth®.
7. “▭”: **USB**
   Naciśnij, aby przełączyć na kanał USB.
8. “▣”: **SUB PAIR**
   Naciśnij i przytrzymaj przycisk przez 3 sekundy, aby przełączyć Soundbar w stan gotowości do parowania z subwooferem.
9. “ᛯ”: **XUPMIX**
   Ustawienie domyślne to „on”, co umożliwia jednolitą kontrolę aktywacji i dezaktywacji 6 trybów efektów dźwiękowych.
   Xupmix on: Dźwięk kanału surround będzie dostarczany przez bogaty sygnał wielokanałowy przetwarzany przez algorytm, oferując bardziej immersyjne doświadczenia słuchowe.
   Xupmix off: Dźwięk kanału surround będzie optymalizowany na podstawie sygnałów kanałów lewego i prawego za pomocą algorytmu, co daje szerszy efekt sceny dźwiękowej.
10. “＋”: **Głośność +**
11. “—”: **Głośność –**
12. “<”: **Poprzedni**
    Tylko BLUETOOTH® i USB: poprzedni utwór.
13. “>”: **Następny**
    Tylko BLUETOOTH® i USB: następny utwór.
14. “⏯”: **Odtwarzanie / Pauza**
    Tylko BLUETOOTH® i USB.
15. “🔇”: **MUTE**
    Wycisz. Naciśnij i przytrzymaj przez 5 sekund, aby zresetować.
16. “💡”: **LED DIMMER**
    Naciśnij, aby dostosować jasność wyświetlacza w 5 poziomach.
    Naciśnij i przytrzymaj przez 3 sekundy, aby wyłączyć wyświetlacz.
17. “BASS ᛯ”: **BASSMX**
    Naciśnij, aby regulować bas.
18. “MIDRANGE”: **MIDRANGE**
    Naciśnij, aby dostosować poziom tonów średnich.
19. “TREBLE”: **TREBLE**
    Naciśnij, aby wyregulować poziom wysokich tonów.
20. “🎬”: **MOVIE**
    Naciśnij, aby przełączyć na tryb FILMOWY, na wyświetlaczu pojawi się: „E91”.
21. “♫”: **MUSIC**
    Naciśnij, aby przełączyć na tryb MUZYKI, na wyświetlaczu pojawi się: „ E92 ”.
22. “▁▂▃▂▁”: **VOICE**
    Naciśnij, aby przełączyć na tryb GŁOSOWY, na wyświetlaczu pojawi się: „ E93 ”.
23. “🏃”: **SPORT**
    Naciśnij, aby przełączyć na tryb SPORTOWY, na wyświetlaczu pojawi się: „ E94 ”.
24. “🎮”: **GAME**
    Naciśnij, aby przełączyć na tryb GRY, na wyświetlaczu pojawi się: „ E95 ”.
25. “🌙”: **NIGHT**
    Naciśnij, aby przełączyć na tryb NOCNY, na wyświetlaczu pojawi się: „ E96 ”.
26. “SURROUND”: **SURROUND**
    Naciśnij, aby wyregulować poziom dźwięku przestrzennego.
27. “PROMPT TONE”: **PROMPT TONE**
    Naciśnij, aby dostosować poziom tonu powiadomień, wyświetlacz pokaże: “PE 0”, “PE 1”, “PE 2”, “PE 3”.

## 5 ZŁĄCZA NA TYLNYM PANELU

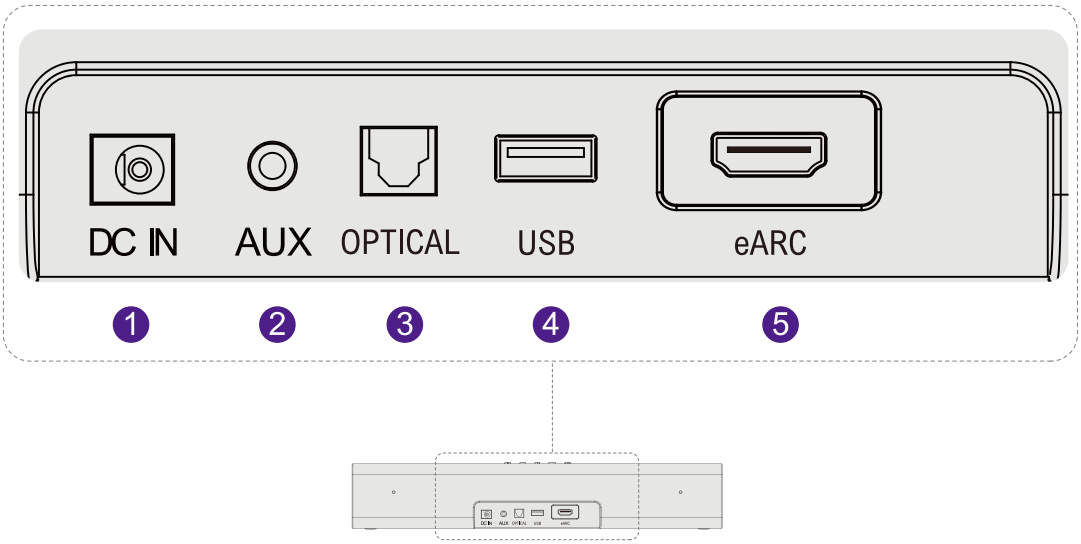



1. **DC IN**
2. **AUX**
3. **OPTICAL**
4. **USB (Obsługuje MP3 lub FLAC)**
5. **HDMI to TV(eARC)**

## 6USTAWIENIE SYSTEMU

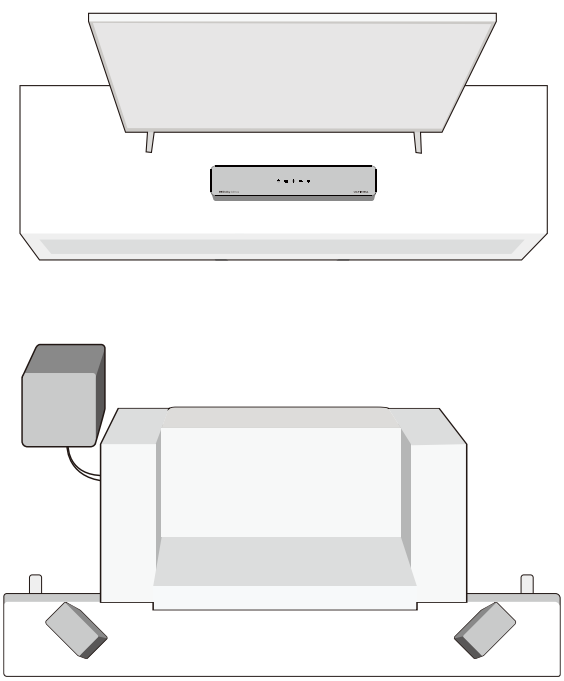

Uwaga: Umieść soundbar na wysokości uszu.


## 7 MONTAŻ NA ŚCIANIE

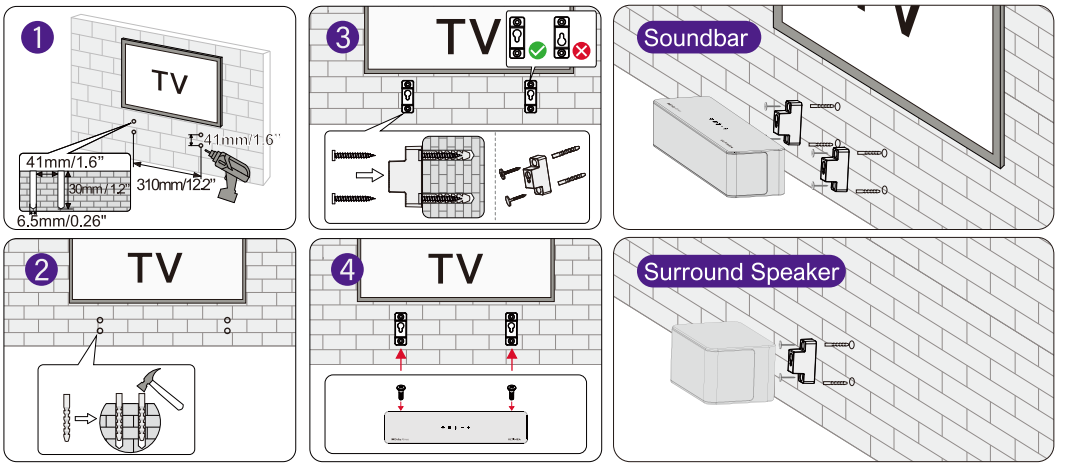



Uwaga: Uchwyt ścienny używany do głośników surround jest identyczny z uchwytem głośnika dźwiękowego, więc pionowy rozstaw otworów jest taki sam jak w przypadku soundbara, a metoda instalacji jest również taka sama.

## 8 PODŁĄCZ I WŁĄCZ


1 Podłącz soundbar do zasilania.

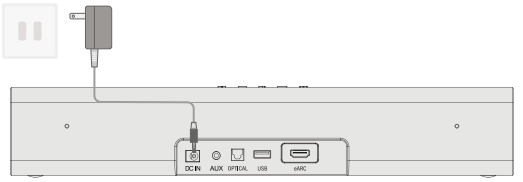



2 Podłącz subwoofer do zasilania.



3 **Podłącz subwoofer i głośniki surround za pomocą kabla głośnikowego surround.**
Satelitarne głośniki surround po prawej stronie będą miały czerwone interfejsy, podczas gdy satelitarne głośniki surround po lewej stronie będą miały białe interfejsy.

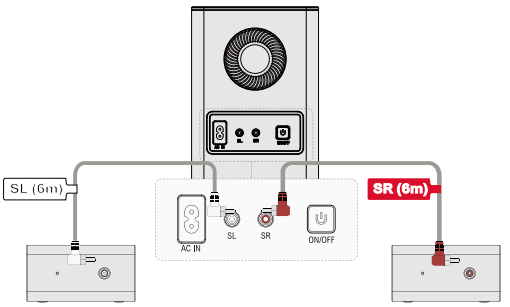



4 **Włóż baterie do pilota.**
Uwaga: Zalecane baterie alkaliczne. Baterie akumulatorowe niezalecane.




## 9. PODŁĄCZENIE DO TV PRZEZ HDMI eARC

1. Podłącz jeden koniec kabla HDMI do portu eARC/ARC w TV.

2. Podłącz drugi koniec do portu eARC soundbara.

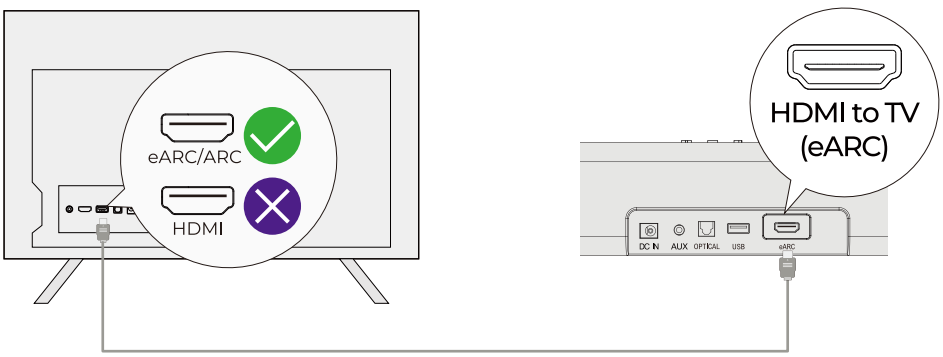


3. Naciśnij przycisk "Source" na soundbarze lub pilocie zdalnego sterowania, aby wybrać wejście "eARC".

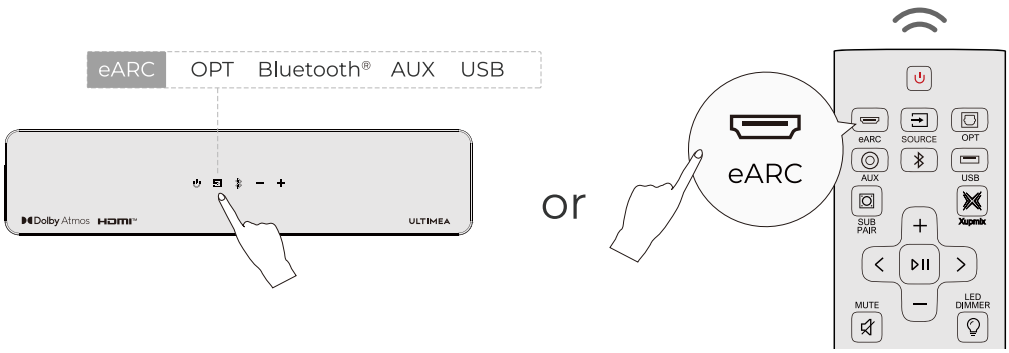


**Uwaga: Upewnij się, że port HDMI w telewizorze obsługuje eARC; w przeciwnym razie sygnał audio Dolby Atmos nie może być przesyłany.**

**Dolby Atmos:** Jeśli oglądasz treści w formacie Dolby Atmos, ustaw wyjście audio w telewizorze na „Pass Through".
Ustawienia TV > Strona główna > Ustawienia > Dźwięk > Cyfrowe wyjście audio > Pass Through

**HDMI eARC** (Enhanced Audio Return Channel) to ulepszona wersja ARC, która obsługuje wyższej jakości formaty audio, takie jak Dolby Atmos.


**Uwaga: Włącz funkcję „CEC" w telewizorze. Gdy eARC jest podłączony, pilot telewizyjny może jednocześnie sterować soundbarem i telewizorem:**

(1) Włączanie / Tryb czuwania


(2) Regulacja głośności

## 10. PODŁĄCZENIE DO TV PRZEZ KABEL OPTYCZNY

1. Upewnij się, że telewizor jest wyposażony w złącze OPTICAL OUT. Użyj kabla optycznego, aby połączyć złącze OPTICAL OUT telewizora ze złączem OPTICAL IN soundbara.

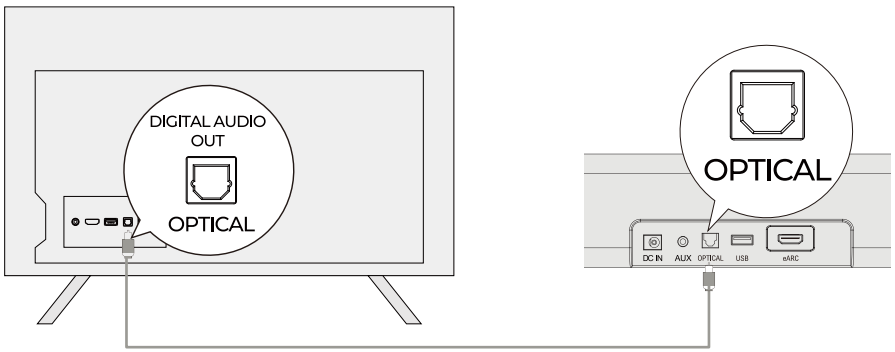



2. Upewnij się, że wtyk kabla optycznego jest prawidłowo włożony, jak pokazano na ilustracji. Nie wkładaj wtyku odwrotnie, ponieważ może to spowodować uszkodzenie portu optycznego.
3. Ustawienia TV > Home > Dźwięk > Wyjście cyfrowe > PCM

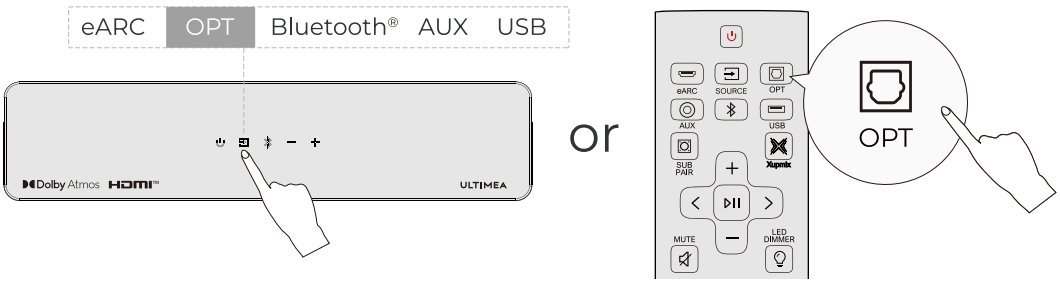


**Uwaga: Jeśli dźwięk jest odtwarzany przez wewnętrzne głośniki telewizora, wycisz telewizor lub zmniejsz głośność do minimum.**


Port optyczny nie obsługuje Dolby Atmos. Aby uzyskać najlepsze wrażenia z Dolby Atmos, użyj HDMI eARC.

## 11. POŁĄCZENIE BLUETOOTH®

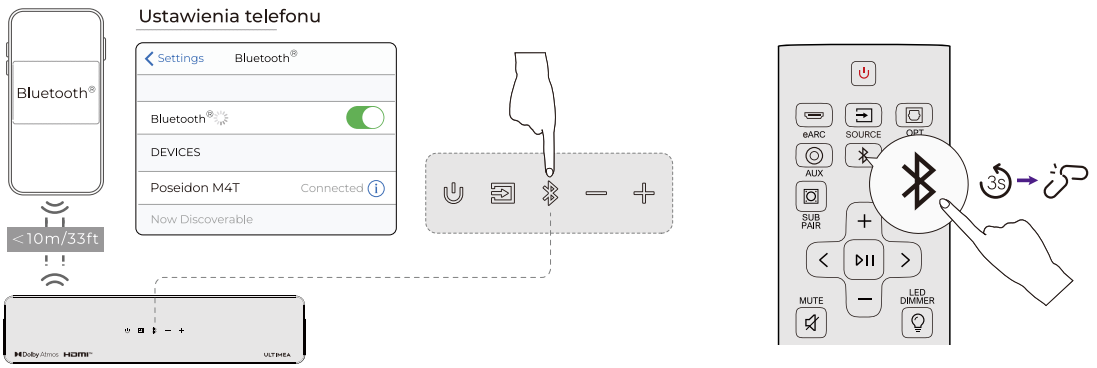


1. Naciśnij przycisk „ ” na soundbarze lub pilocie, aby wejść w tryb parowania Bluetooth®.
2. Otwórz ustawienia Bluetooth® w telefonie, znajdź i wybierz „Poseidon M4T”, aby połączyć się z soundbarem.
3. Uwaga: Jeśli soundbar jest już w trybie Bluetooth® i jest połączony z urządzeniem, naciśnij i przytrzymaj przycisk „ ” przez 3 sekundy, aby rozłączyć aktualnie połączone urządzenie. Następnie ręcznie wybierz soundbar na telefonie, komputerze lub telewizorze, aby nawiązać nowe połączenie Bluetooth®.

## 12 PONOWNE PAROWANIE SUBWOOFERA

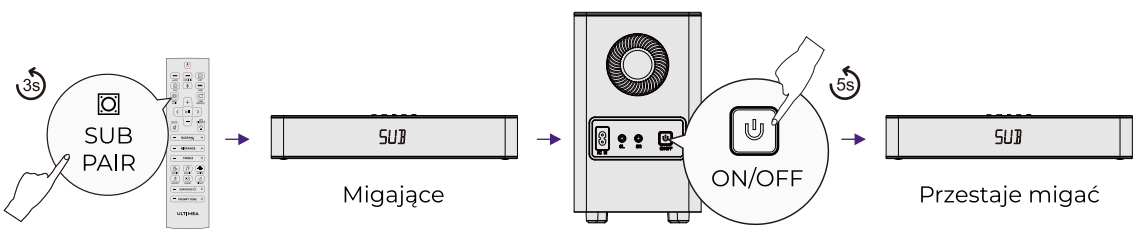



**Zazwyczaj soundbar i subwoofer są sparowane fabrycznie.**
**Jeśli połączenie zostanie utracone, wykonaj poniższe kroki.**

1. Przytrzymaj przycisk „SUB PAIR” przez 3 sekund.
   Wyświetlacz miga “ SUB ”, wskazując tryb parowania.
2. Przytrzymaj przycisk parowania z tyłu subwoofera przez 5 sekund.
3. Po pomyślnym sparowaniu wyświetlacz przestaje migać, a wskaźnik świeci ciągle.

## 13 PRZYWRACANIE USTAWIEŃ FABRYCZNYCH

Przytrzymaj przycisk MUTE przez 5 sekund, aby przywrócić ustawienia fabryczne.

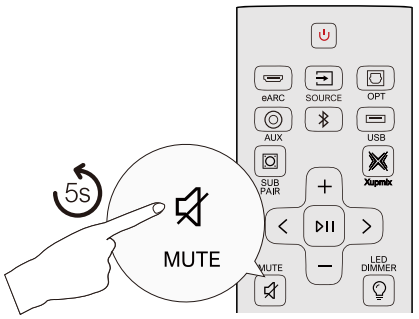



## 14 REGULACJA GŁOŚNOŚCI DŹWIĘKU KOMUNIKATU


Download Ultimea App

Available on the App Store

GET IT ON Google Play

ULTIMEA



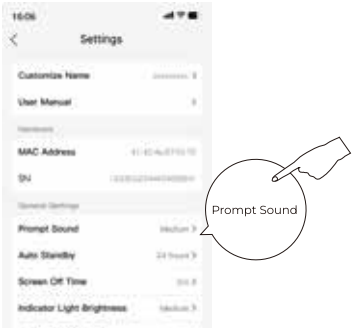
Jeśli dźwięk komunikatu jest zbyt głośny, można go regulować w aplikacji ULTIMEA.

1. Zeskanuj kod QR, aby pobrać aplikację ULTIMEA i dodać soundbar.
2. Otwórz szczegóły urządzenia, stuknij Ustawienia i wybierz “Prompt Sound ”, aby dostosować.

## 15 DANE TECHNICZNE

| | |
|---|---|
| **Model Number** | U2522 |
| **Power Supply** | DC 18V 3A (Soundbar) / AC 100~240V (Subwoofer) |
| **Soundbar Drivers** | Soundbar: 2.25" × 3, Surround: 2.25" × 2, Subwoofer: 5.25" |
| **Auto Standby** | The soundbar will turn to standby mode if there is no audio signal for 15 minutes. You can set the standby time in the App |
| **Standby Power** | <0.5W |
| **Operating Temperature** | -10°C – 40°C / 14°F – 104°F |
| **Bluetooth® Version** | 5.3 |

| | |
|---|---|
| **Soundbar** | 400 x 70x 90 mm/15.7" x 2.8" x 3.5" |
| **Subwoofer** | 155x244x215mm/6.1"x9.6"×8.5" |
| **Surround** | 135x70x90mm/5.3"x2.8"x3.5" |
| **Packaging** | 328x440x190mm/12.9"×17.3" x 7.5" |
| **Packaging Weight** | 6.35 kg /14 lbs |

| | |
|---|---|
| **USB Output** | 5V 500mA |
| **Operating Altitude** | 2000 meters above sea level |
| **Wall Mount Screw** | 4 × 32 mm / 0.16" × 1.26" |
| **Bracket Screws Diameter** | 3 mm / 0.12" |
| **Remote Control Battery Type** | 2 × AAA (NOT INCLUDED) |
| Notice: Risk of fire or explosion if the battery is replaced by an incorrect type. | |

## PROPER DISPOSAL INSTRUCTIONS



This mark shown on the product or its packaging, indicates that this product should not be disposed of with other household waste at the end of its working life. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources.

### For indoor use only



This symbol indicates that the product is intended for indoor use only.

### Class II equipment



This symbol indicates that the product is Class II equipment.

### Waste Electrical & Electronic Equipment

Household user should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take this item for environmentally safe recycling.
Business users should contact their suppliers and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.

### WIRELESS FREQUENCY RANGE AND WIRELESS OUTPUT POWER:

Frequency: 2.402GHz-2.48GHz
The Max. transmit power (Applies only to the EU): 10 dBm

### FCC REGULATORY COMPLIANCE

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
This device complies with Part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) This device may not cause harmful interference.
(2) This device must accept any interference received, including interference that may cause undesired operation.
NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.
However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

### ISED WARNINGS

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

(1) This device may not cause interference.
(2) This device must accept any interference, including interference that may cause undesired operation of the device.
L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux
CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence.
L'exploitation est autorisée aux deux conditions suivantes :
1) L'appareil ne doit pas produire de brouillage;
2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.
3) The device meets the exemption from the routine evaluation limits in issue6 of RSS 102 and compliance with RSS-102 RF exposure, users can obtain Canadian information on RF exposure and compliance.
Le dispositif rencontre l'exemption des limites courantes d'évaluation dans la numéro 6 de RSS 102 etla conformité à l'exposition de RSS-102 rf, utilisateurs peut obtenir l'information canadienne surl'exposition et la conformité de rf.
This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.
Cet émetteur ne doit pas être Co-placé ou ne fonctionnant en même temps qu'aucune autre antenne ouémetteur. Cet équipement devrait être installé et actionné avec une distance minimum de 20 centimètres entre le radiateur et votre corps.

### Wireless Capability Description:

The subwoofer is equipped with a wireless signal reception module, enabling it to receive audio signals from the main device for playback. This device only supports wireless signal reception and cannot relay or forward signals.
The two surround speakers in the system are designed for wired connection and do not have the ability to transmit or receive wireless signals.
The remote control uses infrared (IR) technology for device control and does not support any other wireless signal transmission or reception capabilities.

⚠ **CA WARNING:** Can expose you to BPA, a carcinogen, and BPA, a reproductive. toxicant. See www.P65Warnings.ca.gov.

### CE WARNINGS

1) Do not install this equipment in a confined or building-in space such as a book case or similar unit, and remain a well ventilation conditions. The ventilation should not be impeded by covering the ventilation openings with items such as newspaper, table-cloths, curtains etc.
2) WARNING: To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture. The apparatus shall not be exposed to dripping or splashing and that objects filled with liquids, such as vases, shall not be placed on apparatus.
3) WARNING: The adapter plug is used as disconnect device, the disconnect device shall remain readily operable.
4) Frequency: 2.402GHz-2.48GHz
5) The Max. transmit power: 10 dBm

## EU Declaration of Conformity

We (Manufacturer is responsible for this declaration)
Ultimea Technology (Shenzhen) Limited
(Company name)

9th Floor, Building A, Shenzhen Industrial Software Park, Bantian Street, Longgang District, Shenzhen, China 518000 (Company address)

Declare under our sole responsibility that the product
Trade Mark: ULTIMEA
Product Name: Poseidon M4T 5.1 Channel Dolby Atmos Soundbar
Model No.: U2522

The product to which this declaration relates is in conformity with the essential requirements set out in the Council Directive on the Approximation of the laws of the Member States relating to the Radio Equipment Directive (2014/53/EU), the Restriction of Hazardous Substances Directive (2011/65/EU), the Electromagnetic Compatibility Directive (2014/30/EU), and the Low Voltage Directive (2014/35/EU). The product is responsible for affixing the CE marking, and the following standards were applied:

EN 55032:2015/A1:2020

EN 55035:2017/A11:2020

EN IEC 61000-3-2:2019/A1:2021

EN 61000-3-3:2013/A2:2021

ETSI EN 301 489-1 V2.2.3 (2019-11)

ETSI EN 301 489-17 V3.3.1 (2024-09)

ETSI EN 300 328 V2.2.2 (2019-07)

EN 50663: 2017

EN IEC 62368-1:2020+A11:2020

IEC 62321-3-1:2013

IEC 62321-4:2013+A1:2017

IEC 62321-5:2013

IEC 62321-6:2015

IEC 62321-7-1:2015

IEC 62321-7-2:2017

IEC 62321-8:2017

Full Name: Yoyo.Yu
Position: Approbation Manager

Signature: yoyo yu

Place/Date: Shenzhen, China / Sep. 13-2024

## Trade Marks:

Dolby, Dolby Atmos, and the double-D symbol are registered trademarks of Dolby Laboratories Licensing Corporation. Manufactured under license from Dolby Laboratories. Confidential unpublished works. Copyright © 2012–2024 Dolby Laboratories. All rights reserved.

The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Ultimea Technology (Shenzhen) Limited. is under license. Other trademarks and trade names are those of their respective owners.

## General specification (English):

Model: U2522
Sound system: 5.1 channel
Power supply: 18V 3A DC(Soundbar);
100-240V~50/60Hz AC (Subwoofer)
Drivers: 2.25"×3(Soundbar) + 2.25"×2 (Surround)
+5.25"(Subwoofer)
Standby Power: <0.5W
USB Output: 5V 500mA DC
Operating Temperature: -10°C-40°C/14°F-104°F
Operating Altitude: 2000 meters above sea level
Wall Mount Screw: 4 × 32 mm / 0.16" × 1.26"
Bracket Screws Diameter: 3 mm / 0.12"
Remote Control Battery Type: 2 x AAA (NOT INCLUDED)
Notice: Risk of fire or explosion if the battery is replaced by an incorrect type.

**Dimensions**

・Soundbar dimensions (W x H x D):
400 x 70 x 90 mm / 15.7" x 2.8" x 3.5"
・Subwoofer dimensions (W x H x D):
155 x 244 x 215 mm / 6.1" x 9.6" x 8.5"
・Surround dimensions (W x H x D):
135 x 70 x 90 mm / 5.3" x 2.8" x 3.5"
・Packaging dimensions (W x H x D):
328 x 440 x 190 mm / 12.9" x 17.3" x 7.5"
・Packaging Weight: 6.35 kg / 14 lbs

**Power Consumption and Wireless Connection Setup Guide**

1. Information on power consumption
This equipment complies with European COMMISSION REGULATION (EU) 2023/826.
・Off: N/A
・Standby (when all wireless connections are deactivated): < 0.5 W
・Networked standby for Soundbar: < 2.0 W
*The duration for the device to enter standby mode can be set in the app. Changing this setting may lead to a significant increase in energy consumption, negatively impacting the environment.
2. The period of time after which the power management function switches the equipment automatically into:

| | | |
|---|---|---|
| Off | N/A | |
| Standby | When the soundbar is idle (with no playback or operation) and neither Bluetooth® nor the app is connected. | Switched to standby mode after 15 minutes. |
| Networked standby | When Bluetooth® or the app is connected. | Switched to networked standby mode after 15 minutes of inactivity in operational mode. |

3. If this equipment has the wireless network connections:
How to activate wireless network connections:
・Set up the equipment properly;
・Switch into wireless mode (Bluetooth®);
・Connect with energy using products (e.g. players/ game consoles/ STB (Set-Top Boxes)/ phones/ tablets /PCs). How to deactivate wireless network connections: ・Switch to another channel besides Bluetooth®;
・Then long press on the remote control for more than 3 seconds.

For other languages of the above content
(DE, FR, ES, IT, PT, NL, PL, SV, TR, JP, CN, TC, KO, ID, TH, AR),
please scan the QR code

## IMPORTANT SAFETY INSTRUCTIONS (English):

1.Please read and retain this manual. Follow all warnings and operate according to the instructions.
2.Do not use the device near water sources, in damp environments, or in the rain. Avoid splashing liquids or placing objects containing liquids (such as vases) on the device.
3.Clean only with a dry cloth. Do not use liquid cleaners.
4.Do not block ventilation openings or install the device in an enclosed space. Ensure proper ventilation and install according to the manufacturer's instructions.
5.Do not install the device near heat sources such as radiators, stoves, or amplifiers. Do not cover the ventilation openings with items such as newspapers or curtains.
6.Use only attachments, stands, or accessories specified by the manufacturer. When using a device with wheels, move with care to avoid tipping.
7.Protect the power cord from being pinched, stepped on, or bent, especially at plugs, outlets, and the point where it exits the device.
8.Do not alter the polarized or grounding-type plug. If the plug does not fit into the outlet, consult an electrician to replace the outlet.
9.Unplug the device during lightning storms or when unused for long periods. To fully disconnect power, unplug the device from the wall outlet and ensure the plug is accessible.
10.Do not place any open flame sources (such as lit candles) on or near the device.
11.Do not attempt to open the device. High voltage inside may be fatal. There are no user-serviceable parts inside. All servicing must be performed by qualified personnel.
12.The installation height of the device must not exceed 2 meters.

Scan QR for safety info / QR-Code für Infos scannen / Scanner le QR pour infos / Escanee QR para info / Scansiona il QR per info / Leia o QR para info / Scan QR-code voor info / Zeskanuj kod QR / Skanna QR för info / QR kodu tara / QRコードをスキャン / 扫码查看安全信息 / 掃碼查看安全資訊 / QR 코드 스캔 / Pindai QR untuk informasi keselamatan / สแกน QR เพื่อดูข้อมูลความปลอดภัย / امسح رمز QR لمعلومات السلامة

ULTIMEA

Product Name: Poseidon M4T 5.1 Channel Dolby Atmos Soundbar
Model No.: U2522
HVIN: U2522

EC REP

Ultimea GmbH
Buchenring 57, 22359 Hamburg, Germany

UK REP

EVATOST CONSULTING LTD
Office 101 32 Threadneedle Street, London,
United Kingdom, EC2R 8AY

© Ultimea Inc. All rights reserved, registered in the United States and other countries.
801 S. Dupont Ave., Ste G, Ontario, CA, 91761, USA

Made in China
Manufacturer: Ultimea Technology (Shenzhen) Limited
Address: 9th Floor, Building A, Shenzhen Industrial Software Park, Bantian Street, Longgang District, Shenzhen, China 518000

Manufacturer Contact Information:

+1 888-598-8875 (US)
Mon-Fri 9am-5pm (PST)

+49 89-628-25828 (EU)
Mon-Fri 9am-5pm (CET)

support@ultimea.com

support.ultimea.com

If you need our support, kindly reach out to our service team.
We are always glad to help.

Download Ultimea App

GET IT ON Google Play

Available on the App Store

ULTIMEA

Search for “ULTIMEA” on social media.

RoHS

FR Cet appareil, ses accessoires, et cordons se recyclent

REPRISE À LA LIVRAISON ou À DÉPOSER EN MAGASIN ou À DÉPOSER EN DÉCHÈTERIE

Points de collecte sur www.uefairedemesdechets.fr

Warranty Extension Plan

Regardless of where you purchased your Ultimea product,
you can easily opt for this extended warranty.
Scan to check out our extended warranty options.