ULTIMEA

Dolby Atmos

HDMI
HIGH-DEFINITION MULTIMEDIA INTERFACE

Bluetooth®



使用者手冊


Poseidon M4T


型號: U2522

5.1 聲道 Dolby Atmos 聲霸


- 1.請閱讀並妥善保管本說明書。遵守所有警告，並按照說明操作。
- 2.請勿在水邊、潮濕環境或雨中使用本設備。避免將液體灑在設備上，或將裝有液體的物品（如花瓶）放在設備上。
- 3.僅使用乾布清潔。請勿使用液體清潔劑。
- 4.請勿堵塞通風口，或將設備安裝在密閉空間內。確保通風良好，並按照製造商的說明安裝設備。
- 5.請勿將設備安裝在熱源附近，如散熱器、爐灶、擴大機或其他發熱設備。請勿用報紙或窗簾等物品遮蓋通風口。
- 6.僅使用製造商指定的附件、支架或配件。使用附有輪子的設備時，移動時請小心，以防傾倒。
- 7.保護電源線不被踩踏、擠壓或彎折，尤其是在插頭、插座及電源線從設備引出的部位。
- 8.請勿修改插頭的極性或接地特性。如果插頭與插座不匹配，請諮詢電工更換插座。
- 9.雷雨天氣或長時間不使用時，請拔下電源線。
- 10.請勿在設備上放置任何明火源，如點燃的蠟燭。
- 11.請勿嘗試打開設備。內部高壓可能導致觸電或死亡。所有維修必須由合格人員進行。
- 12.設備的安裝高度不得超過 2 米。

2 配件清單

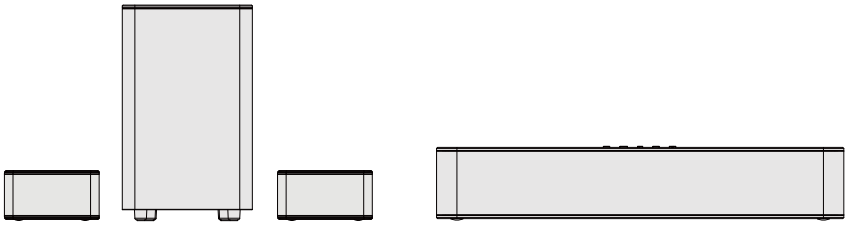





音響電源適配器
(2m/78")




低音炮電源線
(2m/78")



環繞連接電纜
(6m/236")




HDMI線
(1.5m/59")




數位光纖線
(1.5m/59")




遙控器



支架螺絲




掛牆支架



牆體膨脹管

3 音響控制

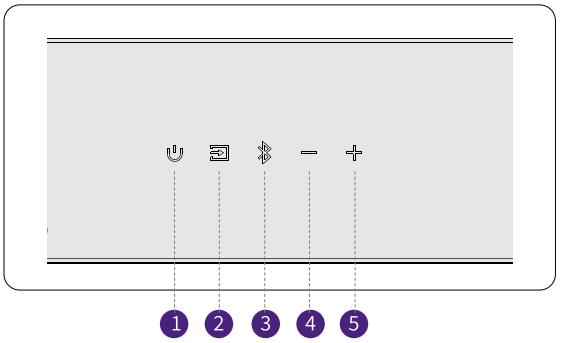

控制面板

❶ “⏻”：**電源鍵**
按下開機 / 關機

❷ “⏍”：**訊號源**
按下切換：eARC - OPT(OPTICAL) - Bluetooth® - AUX - USB.


❸ “”：**Bluetooth®**
按下進入藍牙模式，自動配對
長按3秒中斷並重新配對（ID：Poseidon M4T）

❹ “—”：**音量–**

❺ “+”：**音量＋**


4 遙控器

1. “ ”: **電源鍵**
按下開機/關機
2. “ ”: **eARC**
按下切換到 HDMI eARC 通道。
3. “ ”: **SOURCE**
按下切換頻道
4. “ ”: **OPT**
按下切換到光纖通道。
5. “ ”: **AUX**
按下切換到 AUX 通道。
6. “ ”: **Bluetooth®**
按下切換至藍牙通道
7. “ ”: **USB**
按下切換到 USB 通道。
8. “ ”: **SUB PAIR**
按住按鈕 3 秒鐘，讓 Soundbar 進入準備與重低音音箱配對的狀態。
9. “ ”: **XUPMIX**
預設設定為「開」，可統一控制 6 種音效模式的開啟和關閉。
Xupmix on：環繞聲道聲音將由演算法處理的豐富多聲道訊號提供，帶來更具沉浸感的聽覺體驗。
Xupmix off：環繞聲道聲音將基於左右聲道訊號透過演算法進行優化，產生更寬闊的聲場效果。
10. “ + ”: 音量加
11. “ — ”:音量減
12. “ < ”: 上一曲
仅限Bluetooth®和USB模式：上一曲
13. “ > ”: 下一曲
仅限Bluetooth®和USB模式：下一曲
14. “ ”: 播放／暫停
仅限Bluetooth®和USB模式
15. “ ”: **MUTE**
靜音。長按5秒可重置。
16. “ ”: **LED DIMMER**
按下可調節顯示屏亮度，共5級。
長按3秒可關閉顯示屏。
17. “ BASS ”: **BASSMX**
按下可調整低音等級。
18. “ MIDRANGE ”: **MIDRANGE**
按下可調節中音等級。
19. “ TREBLE ”: **TREBLE**
按下可調節高音等級。
20. “ ”: **MOVIE**
按下切換到電影模式，顯示屏將顯示：「E91」。
21. “ ”: **MUSIC**
按下切換到音樂模式，顯示屏將顯示：「E92」。
22. “ ”: **VOICE**
按下切換到語音模式，顯示屏將顯示：「E93」。
23. “ ”: **SPORT**
按下切換到運動模式，顯示屏將顯示：「E94」。
24. “ ”: **GAME**
按下切換到遊戲模式，顯示屏將顯示：「E95」。
25. “ ”: **NIGHT**
按下切換到夜間模式，顯示屏將顯示：「E96」。

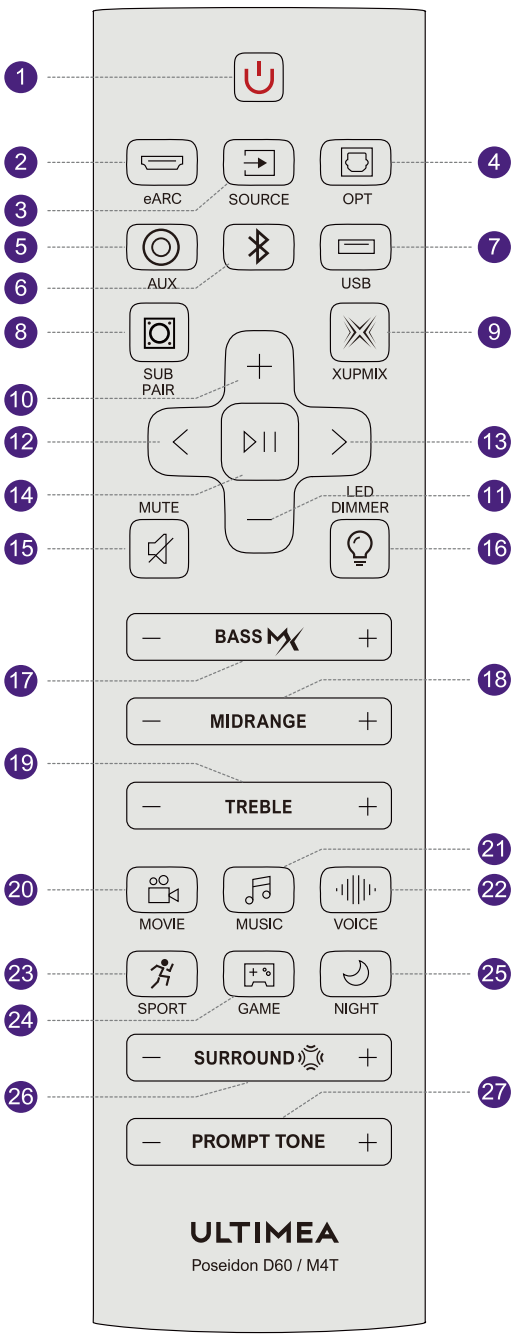


26. “ SURROUND ”: **SURROUND**
按下可調節環繞聲音等級。
27. “ PROMPT TONE ”: **PROMPT TONE**
按下可調節提示音級別，顯示屏將顯示：「Pt 0」、「Pt 1」、「Pt 2」、「Pt 3」.

5 背板接口

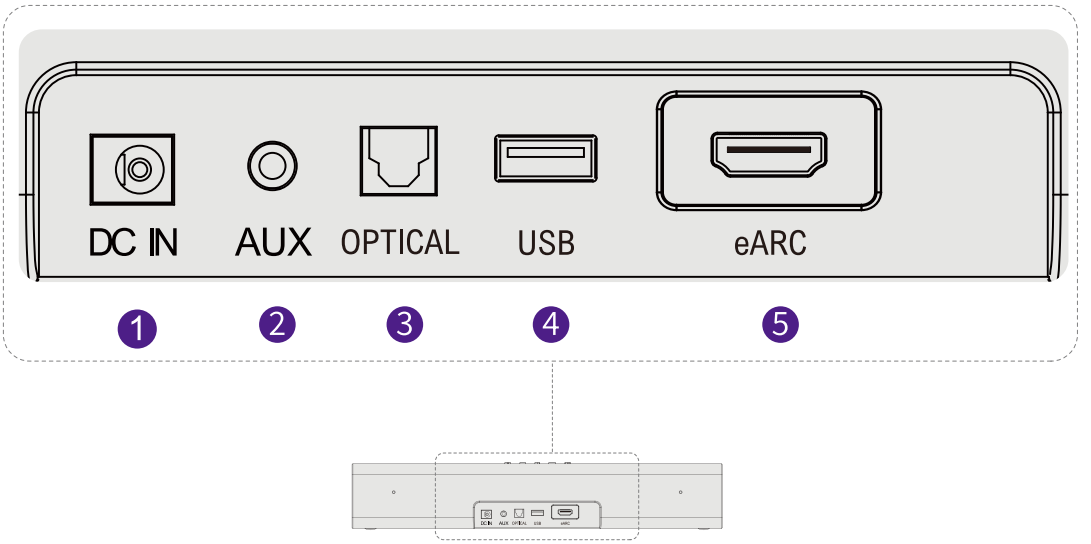


1. **DC IN**
2. **AUX**
3. **OPTICAL**
4. **USB (** 支援MP3或FLAC檔案**)**
5. **HDMI TO TV(EARC)**

6 系統擺放

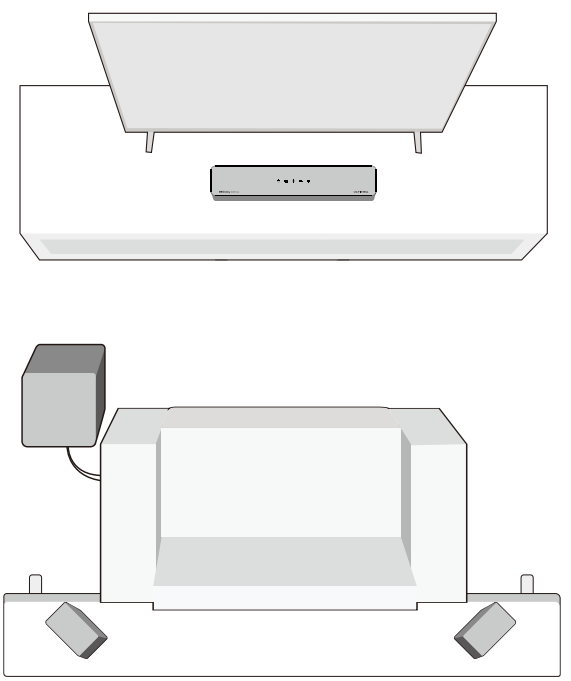

注:建議與耳朵高度一致


7 壁掛安裝

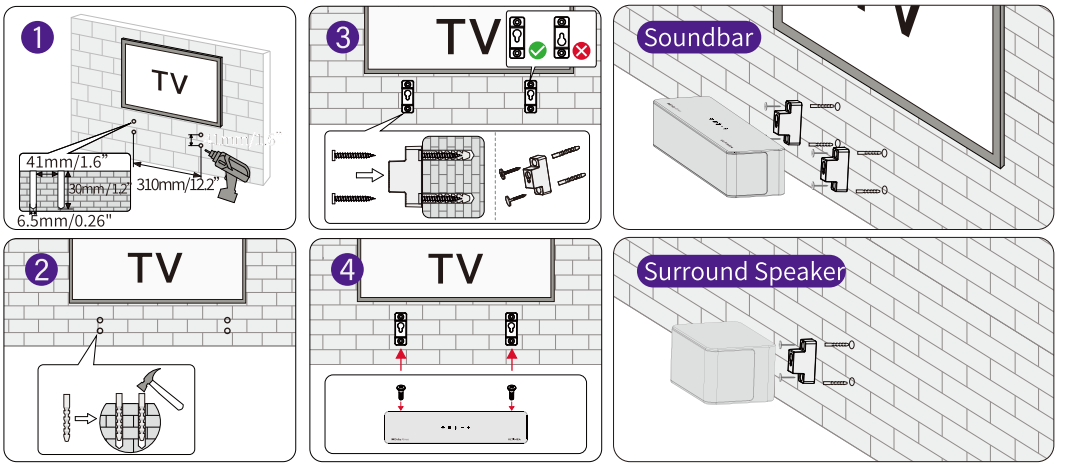


注意：用於環繞聲揚聲器的掛牆支架與主揚聲器的支架相同，因此垂直孔間距與聲霸相同，安裝方法也相同。

8 連接並開機

1 連接音響電源

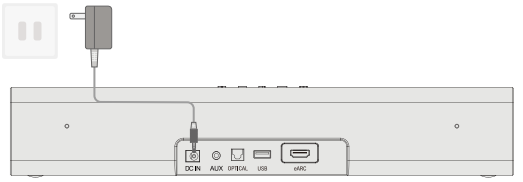


2 連接低音音箱電源。




3 使用環繞線纜連接低音炮和環繞箱。

右側的環繞箱將配備紅色接口，而左側的環繞箱將配備白色接口。

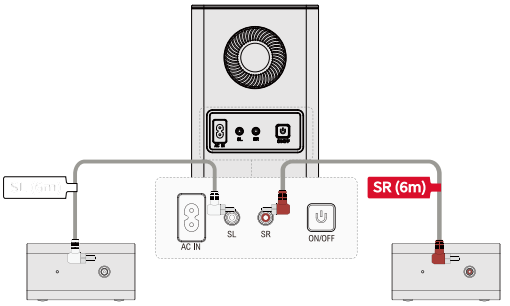

4 將電池裝入遙控器


注：建議使用鹼性電池
不建議使用充電電池




9 透過HDMI eARC連接電視

1 将HDMI线一端连接到电视背面的eARC/ARC接口

2 再将另一端连接到音响的eARC接口

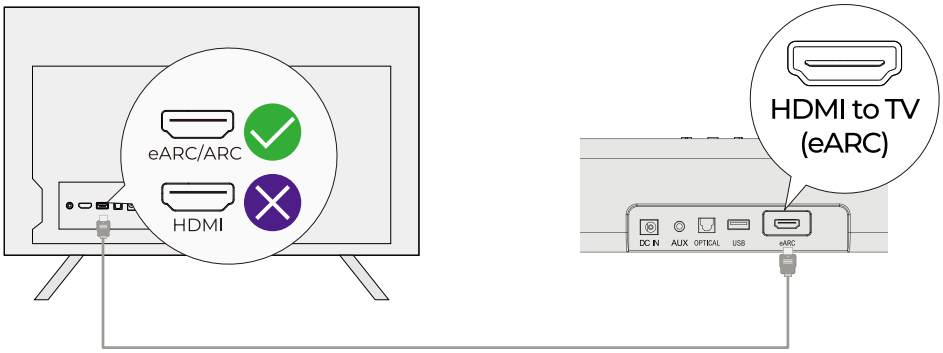

3 按下 Soundbar 或遙控器上的「Source」按鈕，選擇「eARC」輸入。

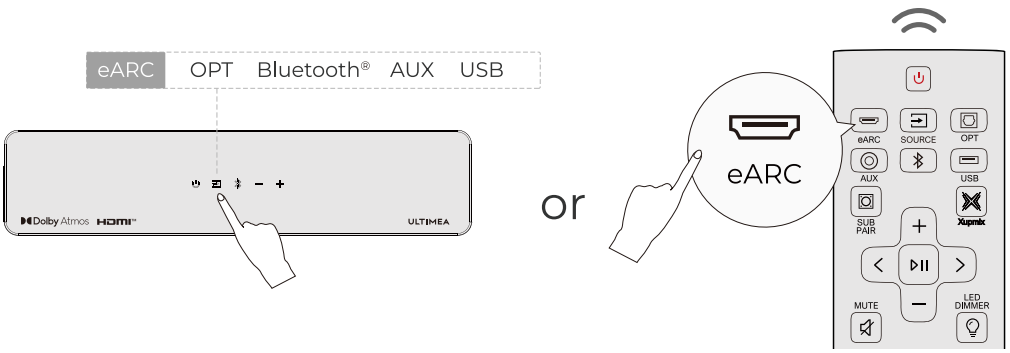

注意：請確保您的電視HDMI連接埠支援eARC，否則無法傳輸杜比全景聲（Dolby Atmos）音訊訊號。


Dolby Atmos：如果您正在觀看 Dolby Atmos 格式的內容，請將電視的音訊輸出設定為「Pass Through」。
電視設定 > 首頁 > 設定 > 聲音 > 數位音訊輸出 > Pass Through

HDMI eARC是ARC的升級版本，支援Dolby Atmos等更高品質的音頻格式。

注意：請在電視上啟用「CEC」功能。當連接eARC後，電視遙控器可同時控制Soundbar和電視：
（1）開機 / 待機
（2）調節音量


10 透過光纖連接電視

1. 確認電視配備 OPTICAL OUT 連接埠。使用光纖音訊線將電視的 OPTICAL OUT 連接埠連接至 Soundbar 的 OPTICAL IN 連接埠。

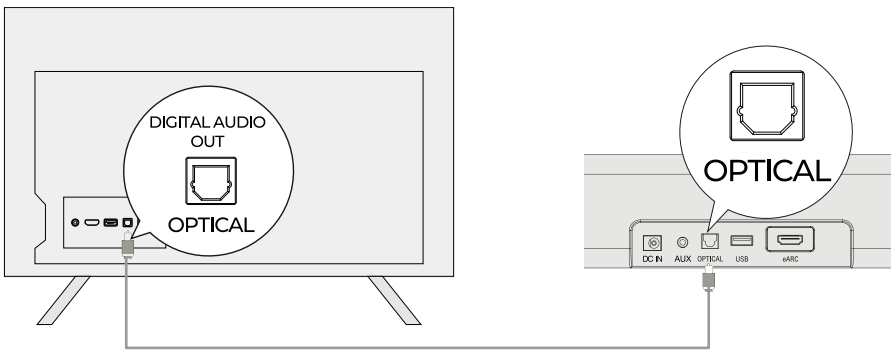


2. 請按照圖示方向正確插入光纖音訊線插頭。請勿將插頭反向插入，以免損壞光纖連接埠。

3. 電視設定 > 主頁 > 設定 > 聲音 > 數位音訊輸出 > PCM

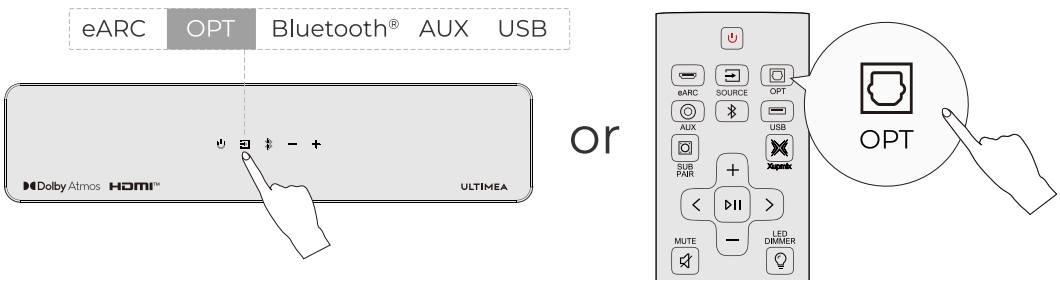

注意：如果音訊透過電視內建揚聲器播放，請將電視靜音或將音量調至最低。
光纖連接埠不支援Dolby Atmos。要獲得最佳Dolby Atmos體驗，請使用HDMI eARC。

11 連接藍牙

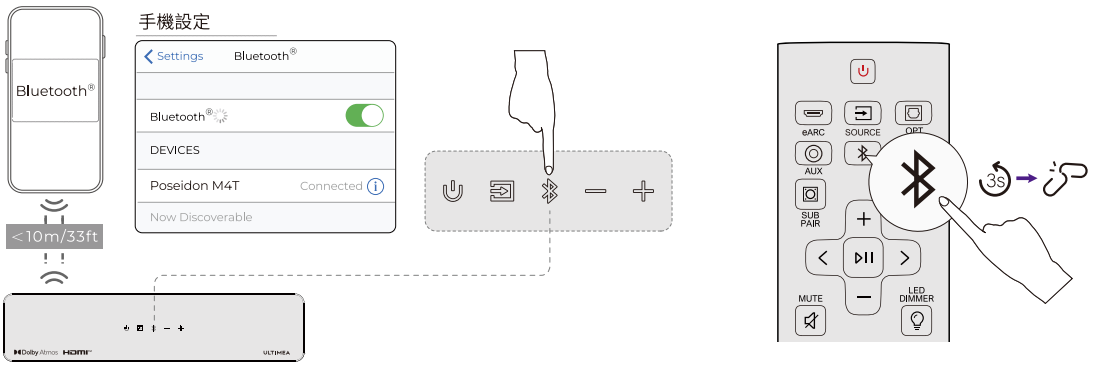


1. 按音響或遙控器上的「 ᛒ 」鍵進入藍牙配對模式

2. 開啟手機的藍牙設定，找到並選擇「Poseidon M4T」，連接 Soundbar。

3. 如果 Soundbar 已處於藍牙模式並連接了裝置，請長按「ᛒ」按鍵 3 秒，斷開目前裝置的連線。然後在手機、電腦或電視上手動選擇 Soundbar，建立新的藍牙連線。

12 重新配對低音炮

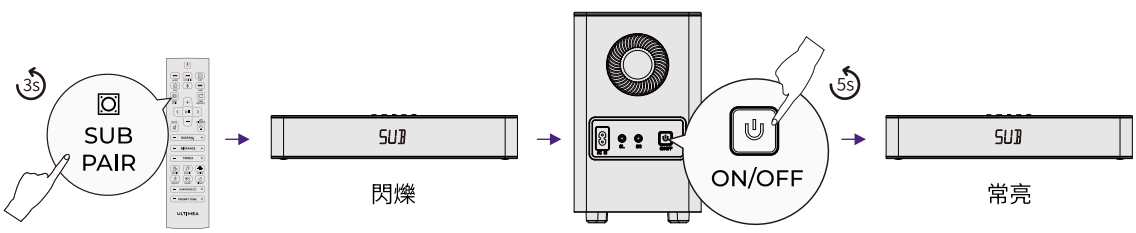


通常，音響與低音炮已預先配對
如果連接中斷，請依照以下步驟重新配對

1. 長按遙控器上的「SUB PAIR」鍵3秒
   主機顯示「SUB」閃爍，表示進入配對模式
2. 長按低音炮背面的配对键5秒
3. 配對成功後，主機顯示停止閃爍，低音炮指示燈保持常亮

13 恢復出廠設定

長按MUTE鍵5秒恢復出廠設定

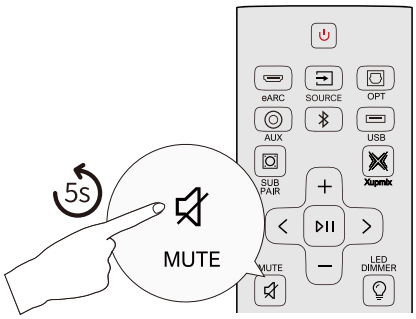


14 調節提示音音量


Download Ultimea App

Available on the App Store

GET IT ON Google Play

ULTIMEA



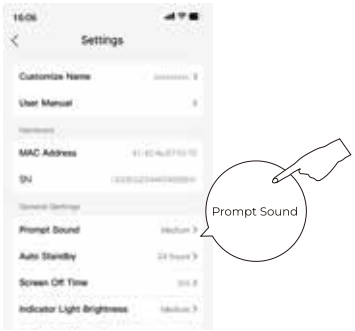

如果提示音過大，可透過ULTIMEA App調節

1. 掃描二維碼下載ULTIMEA App並新增音響
2. 打開裝置詳細頁，點擊右上角設定，選擇「Prompt Sound 」調節

15 技術規格

Model Number	U2522
Power Supply	DC 18V 3A (Soundbar) / AC 100~240V (Subwoofer)
Soundbar Drivers	Soundbar: 2.25" × 3, Surround: 2.25" × 2, Subwoofer: 5.25"
Auto Standby	The soundbar will turn to standby mode if there is no audio signal for 15 minutes. You can set the standby time in the App
Standby Power	<0.5W
Operating Temperature	-10°C – 40°C / 14°F – 104°F
Bluetooth® Version	5.3

Soundbar	400 x 70x 90 mm/15.7" x 2.8" x 3.5"
Subwoofer	155x244x215mm/6.1"x9.6"×8.5"
Surround	135x70x90mm/5.3"x2.8"x3.5"
Packaging	328x440x190mm/12.9"×17.3" x 7.5"
Packaging Weight	6.35 kg /14 lbs

USB Output	5V 500mA
Operating Altitude	2000 meters above sea level
Wall Mount Screw	4 × 32 mm / 0.16" × 1.26"
Bracket Screws Diameter	3 mm / 0.12"
Remote Control Battery Type	2 × AAA (NOT INCLUDED)
Notice: Risk of fire or explosion if the battery is replaced by an incorrect type.	

PROPER DISPOSAL INSTRUCTIONS



This mark shown on the product or its packaging, indicates that this product should not be disposed of with other household waste at the end of its working life. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources.

For indoor use only



This symbol indicates that the product is intended for indoor use only.

Class II equipment



This symbol indicates that the product is Class II equipment.

Waste Electrical & Electronic Equipment

Household user should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take this item for environmentally safe recycling.
Business users should contact their suppliers and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.

WIRELESS FREQUENCY RANGE AND WIRELESS OUTPUT POWER:

Frequency: 2.402GHz-2.48GHz
The Max. transmit power (Applies only to the EU): 10 dBm

FCC REGULATORY COMPLIANCE

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
This device complies with Part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) This device may not cause harmful interference.
(2) This device must accept any interference received, including interference that may cause undesired operation.
NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.
However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

ISED WARNINGS

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

(1) This device may not cause interference.
(2) This device must accept any interference, including interference that may cause undesired operation of the device.
L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux
CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence.
L'exploitation est autorisée aux deux conditions suivantes :
1) L'appareil ne doit pas produire de brouillage;
2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.
3) The device meets the exemption from the routine evaluation limits in issue6 of RSS 102 and compliance with RSS-102 RF exposure, users can obtain Canadian information on RF exposure and compliance.
Le dispositif rencontre l'exemption des limites courantes d'évaluation dans la numéro 6 de RSS 102 etla conformité à l'exposition de RSS-102 rf, utilisateurs peut obtenir l'information canadienne surl'exposition et la conformité de rf.
This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.
Cet émetteur ne doit pas être Co-placé ou ne fonctionnant en même temps qu'aucune autre antenne ouémetteur. Cet équipement devrait être installé et actionné avec une distance minimum de 20 centimètres entre le radiateur et votre corps.

Wireless Capability Description:

The subwoofer is equipped with a wireless signal reception module, enabling it to receive audio signals from the main device for playback. This device only supports wireless signal reception and cannot relay or forward signals.
The two surround speakers in the system are designed for wired connection and do not have the ability to transmit or receive wireless signals.
The remote control uses infrared (IR) technology for device control and does not support any other wireless signal transmission or reception capabilities.

⚠ **CA WARNING:** Can expose you to BPA, a carcinogen, and BPA, a reproductive. toxicant. See www.P65Warnings.ca.gov.

CE WARNINGS

1) Do not install this equipment in a confined or building-in space such as a book case or similar unit, and remain a well ventilation conditions. The ventilation should not be impeded by covering the ventilation openings with items such as newspaper, table-cloths, curtains etc.
2) WARNING: To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture. The apparatus shall not be exposed to dripping or splashing and that objects filled with liquids, such as vases, shall not be placed on apparatus.
3) WARNING: The adapter plug is used as disconnect device, the disconnect device shall remain readily operable.
4) Frequency: 2.402GHz-2.48GHz
5) The Max. transmit power: 10 dBm

EU Declaration of Conformity

We (Manufacturer is responsible for this declaration)
Ultimea Technology (Shenzhen) Limited
(Company name)

9th Floor, Building A, Shenzhen Industrial Software Park, Bantian Street, Longgang District, Shenzhen, China 518000
(Company address)

Declare under our sole responsibility that the product
Trade Mark: ULTIMEA
Product Name: Poseidon M4T 5.1 Channel Dolby Atmos Soundbar
Model No.: U2522

The product to which this declaration relates is in conformity with the essential requirements set out in the Council Directive on the Approximation of the laws of the Member States relating to the Radio Equipment Directive (2014/53/EU), the Restriction of Hazardous Substances Directive (2011/65/EU), the Electromagnetic Compatibility Directive (2014/30/EU), and the Low Voltage Directive (2014/35/EU). The product is responsible for affixing the CE marking, and the following standards were applied:

EN 55032:2015/A1:2020
EN 55035:2017/A11:2020
EN IEC 61000-3-2:2019/A1:2021
EN 61000-3-3:2013/A2:2021
ETSI EN 301 489-1 V2.2.3 (2019-11)
ETSI EN 301 489-17 V3.3.1 (2024-09)
ETSI EN 300 328 V2.2.2 (2019-07)
EN 50663: 2017
EN IEC 62368-1:2020+A11:2020
IEC 62321-3-1:2013
IEC 62321-4:2013+A1:2017
IEC 62321-5:2013
IEC 62321-6:2015
IEC 62321-7-1:2015
IEC 62321-7-2:2017
IEC 62321-8:2017

Full Name: Yoyo.Yu
Position: Approbation Manager

Signature: yoyo yu

Place/Date: Shenzhen, China / Sep. 13-2024

Trade Marks:

Dolby, Dolby Atmos, and the double-D symbol are registered trademarks of Dolby Laboratories Licensing Corporation. Manufactured under license from Dolby Laboratories. Confidential unpublished works. Copyright © 2012–2024 Dolby Laboratories. All rights reserved.

HIGH-DEFINITION MULTIMEDIA INTERFACE

The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Ultimea Technology (Shenzhen) Limited. is under license. Other trademarks and trade names are those of their respective owners.

General specification (English):

Model: U2522
Sound system: 5.1 channel
Power supply: 18V 3A DC(Soundbar);
100-240V~50/60Hz AC (Subwoofer)
Drivers: 2.25"×3(Soundbar) + 2.25"×2 (Surround)
+5.25"(Subwoofer)
Standby Power: <0.5W
USB Output: 5V 500mA DC
Operating Temperature: -10°C-40°C/14°F-104°F
Operating Altitude: 2000 meters above sea level
Wall Mount Screw: 4 × 32 mm / 0.16" × 1.26"
Bracket Screws Diameter: 3 mm / 0.12"
Remote Control Battery Type: 2 x AAA (NOT INCLUDED)
Notice: Risk of fire or explosion if the battery is replaced by an incorrect type.

Dimensions

・Soundbar dimensions (W x H x D):
400 x 70 x 90 mm / 15.7" x 2.8" x 3.5"
・Subwoofer dimensions (W x H x D):
155 x 244 x 215 mm / 6.1" x 9.6" x 8.5"
・Surround dimensions (W x H x D):
135 x 70 x 90 mm / 5.3" x 2.8" x 3.5"
・Packaging dimensions (W x H x D):
328 x 440 x 190 mm / 12.9" x 17.3" x 7.5"
・Packaging Weight: 6.35 kg / 14 lbs

Power Consumption and Wireless Connection Setup Guide

1. Information on power consumption
This equipment complies with European COMMISSION REGULATION (EU) 2023/826.
・Off: N/A
・Standby (when all wireless connections are deactivated): < 0.5 W
・Networked standby for Soundbar: < 2.0 W
*The duration for the device to enter standby mode can be set in the app. Changing this setting may lead to a significant increase in energy consumption, negatively impacting the environment.
2. The period of time after which the power management function switches the equipment automatically into:

Off	N/A	
Standby	When the soundbar is idle (with no playback or operation) and neither Bluetooth® nor the app is connected.	Switched to standby mode after 15 minutes.
Networked standby	When Bluetooth® or the app is connected.	Switched to networked standby mode after 15 minutes of inactivity in operational mode.

3. If this equipment has the wireless network connections:
How to activate wireless network connections:
・Set up the equipment properly;
・Switch into wireless mode (Bluetooth®);
・Connect with energy using products (e.g. players/ game consoles/ STB (Set-Top Boxes)/ phones/ tablets /PCs). How to deactivate wireless network connections: ・Switch to another channel besides Bluetooth®;
・Then long press on the remote control for more than 3 seconds.

For other languages of the above content
(DE, FR, ES, IT, PT, NL, PL, SV, TR, JP, CN, TC, KO, ID, TH, AR), please scan the QR code

IMPORTANT SAFETY INSTRUCTIONS (English):

1.Please read and retain this manual. Follow all warnings and operate according to the instructions.
2.Do not use the device near water sources, in damp environments, or in the rain. Avoid splashing liquids or placing objects containing liquids (such as vases) on the device.
3.Clean only with a dry cloth. Do not use liquid cleaners.
4.Do not block ventilation openings or install the device in an enclosed space. Ensure proper ventilation and install according to the manufacturer's instructions.
5.Do not install the device near heat sources such as radiators, stoves, or amplifiers. Do not cover the ventilation openings with items such as newspapers or curtains.
6.Use only attachments, stands, or accessories specified by the manufacturer. When using a device with wheels, move with care to avoid tipping.
7.Protect the power cord from being pinched, stepped on, or bent, especially at plugs, outlets, and the point where it exits the device.
8.Do not alter the polarized or grounding-type plug. If the plug does not fit into the outlet, consult an electrician to replace the outlet.
9.Unplug the device during lightning storms or when unused for long periods. To fully disconnect power, unplug the device from the wall outlet and ensure the plug is accessible.
10.Do not place any open flame sources (such as lit candles) on or near the device.
11.Do not attempt to open the device. High voltage inside may be fatal. There are no user-serviceable parts inside. All servicing must be performed by qualified personnel.
12.The installation height of the device must not exceed 2 meters.

Scan QR for safety info / QR-Code für Infos scannen / Scanner le QR pour infos / Escanee QR para info / Scansiona il QR per info / Leia o QR para info / Scan QR-code voor info / Zeskanuj kod QR / Skanna QR för info / QR kodu tara / QRコードをスキャン / 扫码查看安全信息 / 掃碼查看安全資訊 / QR 코드 스캔 / Pindai QR untuk informasi keselamatan / สแกน QR เพื่อดูข้อมูลความปลอดภัย / امسح رمز QR لمعلومات السلامة

ULTIMEA

Product Name: Poseidon M4T 5.1 Channel Dolby Atmos Soundbar
Model No.: U2522
HVIN: U2522

EC REP

Ultimea GmbH
Buchenring 57, 22359 Hamburg, Germany

UK REP

EVATOST CONSULTING LTD
Office 101 32 Threadneedle Street, London,
United Kingdom, EC2R 8AY

© Ultimea Inc. All rights reserved, registered in the United States and other countries.
801 S. Dupont Ave., Ste G, Ontario, CA, 91761, USA

Made in China
Manufacturer: Ultimea Technology (Shenzhen) Limited
Address: 9th Floor, Building A, Shenzhen Industrial Software Park, Bantian Street, Longgang District, Shenzhen, China 518000

Manufacturer Contact Information:

+1 888-598-8875 (US)
Mon-Fri 9am-5pm (PST)

+49 89-628-25828 (EU)
Mon-Fri 9am-5pm (CET)

support@ultimea.com

support.ultimea.com

If you need our support, kindly reach out to our service team.
We are always glad to help.

Download Ultimea App

GET IT ON Google Play

Available on the App Store

ULTIMEA

Search for “ULTIMEA” on social media.

RoHS

FR Cet appareil, ses accessoires, et cordons se recyclent

REPRISE À LA LIVRAISON OU À DÉPOSER EN MAGASIN OU À DÉPOSER EN DÉCHÈTERIE

Points de collecte sur www.uefairedemesdechets.fr

Warranty Extension Plan

Regardless of where you purchased your Ultimea product, you can easily opt for this extended warranty.
Scan to check out our extended warranty options.