ULTIMEA

Dolby Atmos

HDMI
HIGH-DEFINITION MULTIMEDIA INTERFACE

Bluetooth®



Manual do utilizador


Poseidon M4T


N° do modelo: U2522
Soundbar Dolby Atmos 5.1

1 INSTRUÇÕES IMPORTANTES DE SEGURANÇA


- 1.Leia e guarde estas instruções. Siga todos os avisos e opere de acordo com as instruções.
- 2.Não utilize o dispositivo perto de água, em ambientes húmidos ou à chuva. Evite derramar líquidos sobre o dispositivo ou colocar objetos que contenham líquidos (como vasos) sobre ele.
- 3.Limpe apenas com um pano seco. Não use produtos de limpeza líquidos.
- 4.Não bloqueie as aberturas de ventilação nem instale o dispositivo num espaço confinado. Garanta ventilação adequada e instale o dispositivo de acordo com as instruções do fabricante.
- 5.Não instale o dispositivo perto de fontes de calor como radiadores, fogões, amplificadores ou outros dispositivos que produzam calor. Não cubra as aberturas de ventilação com jornais ou cortinas.
- 6.Utilize apenas acessórios, suportes ou aparelhos especificados pelo fabricante. Ao utilizar equipamentos com rodas, tenha cuidado ao movê-los para evitar quedas.
- 7.Proteja o cabo de alimentação para que não seja pisado, comprimido ou dobrado, especialmente nas fichas, tomadas e no ponto de saída do dispositivo.
- 8.Não modifique a polarização ou as características de aterramento da ficha. Se a ficha não encaixar na tomada, consulte um eletricista para substituir a tomada.
- 9.Desligue o cabo de alimentação durante tempestades ou quando não for utilizado por longos períodos.
- 10.Não coloque fontes de chama aberta, como velas acesas, sobre o dispositivo.
- 11.Não tente abrir o dispositivo. No interior existe alta tensão que pode causar choques elétricos ou morte. Todas as reparações devem ser realizadas por pessoal qualificado.
- 12.A altura de instalação do dispositivo não deve exceder 2 metros.

2 LISTA DE ACESSÓRIOS

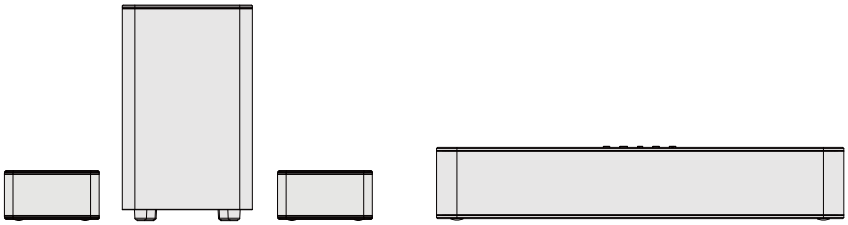





Adaptador de energia da soundbar(2m/78")




Cabo de alimentação do subwoofer(2m/78")



Cabo de conexão surround(6m/236")




Cabo HDMI (1.5m/59")




Cabo óptico digital(1.5m/59")




Comando à distância



Parafusos e buchas de parede




Suporte de parede



Parafuso de fixação do suporte

3 CONTROLES DA SOUNDBAR

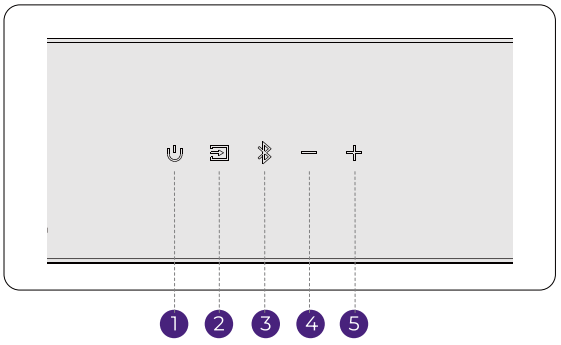

PAINEL DE CONTROLO

1. **"⏻": Botão de energia**
   Pressione para ligar / desligar.

2. **"⏏": Fonte**
   Pressione para alternar: eARC - OPT(OPTICAL) - Bluetooth® - AUX - USB.

3. **"ᛒ": Bluetooth®**
   Pressione para modo Bluetooth®, emparelhamento automático.
   Segure 3 s para desconectar e emparelhar. (ID: Poseidon M4T)

4. **"−": Volume −**

5. **"+": Volume +**

4 Comando à distância

1 “⏻” : **Botão de energia**
Pressione para ligar / desligar.

2 “▭”: **eARC**
Pressione para mudar para o canal HDMI eARC.

3 “⇥”: **SOURCE**
Prima para mudar de canal.

4 “▣”: **OPT**
Pressione para mudar para o canal ÓTICO.

5 “◎”: **AUX**
Pressione para mudar para o canal AUX.

6 “ᛒ”: **Bluetooth®**
Prima para mudar para o canal Bluetooth®.

7 “▭”: **USB**
Prima para mudar para o canal USB.

8 “▣”: **SUB PAIR**
Mantenha pressionado o botão por 3 segundos para colocar a Soundbar em um estado pronto para emparelhar com o subwoofer.

9 “ ✕ ”: **XUPMIX**
A configuração padrão é "on", permitindo controle unificado sobre a ativação e desativação dos 6 modos de efeito sonoro.
Xupmix on: O som do canal surround será fornecido por um sinal multicanal rico processado pelo algoritmo, oferecendo uma experiência auditiva mais imersiva.
Xupmix off: O som do canal surround será otimizado com base nos sinais dos canais esquerdo e direito usando um algoritmo, resultando em um efeito de campo sonoro mais amplo.

10 “ + ”: **Aumentar volume**

11 “ — ”: **Diminuir volume**

12 “ < ”: **Anterior**
Apenas BLUETOOTH® e USB: faixa anterior.

13 “ > ”: **Seguinte**
Apenas BLUETOOTH® e USB: faixa seguinte.

14 “▷II”: **Reproduzir / Pausa**
Apenas BLUETOOTH® e USB.

15 “🔇”: **MUTE**
Silenciar. Pressione e segure por 5 segundos para redefinir.

16 “💡”: **LED DIMMER**
Prima para ajustar o brilho do ecrã em 5 níveis. Mantenha premido durante 3 segundos para desligar o ecrã.

17 “ BASS ✕ ”: **BASSMX**
Prima para ajustar os graves.

18 “ MIDRANGE ”: **MIDRANGE**
Prima para ajustar o nível das frequências médias.

19 “ TREBLE ”: **TREBLE**
Prima para ajustar o nível de agudos.

20 “🎬”: **MOVIE**
Prima para mudar para o modo FILME, o ecrã mostrará: " E91 ".


21 “♫”: **MUSIC**
Prima para mudar para o modo MÚSICA, o ecrã mostrará: "E92".

22 “▁▂▃▂▁”: **VOICE**
Prima para mudar para o modo VOZ, o ecrã mostrará: " E93 ".

23 “🏃”: **SPORT**
Prima para mudar para o modo DESPORTO, o ecrã mostrará: " E94 ".

24 “🎮”: **GAME**
Prima para mudar para o modo JOGO, o ecrã mostrará: " E95 ".


25 “☾”: **NIGHT**
Prima para mudar para o modo NOTURNO, o ecrã mostrará: " E96 ".

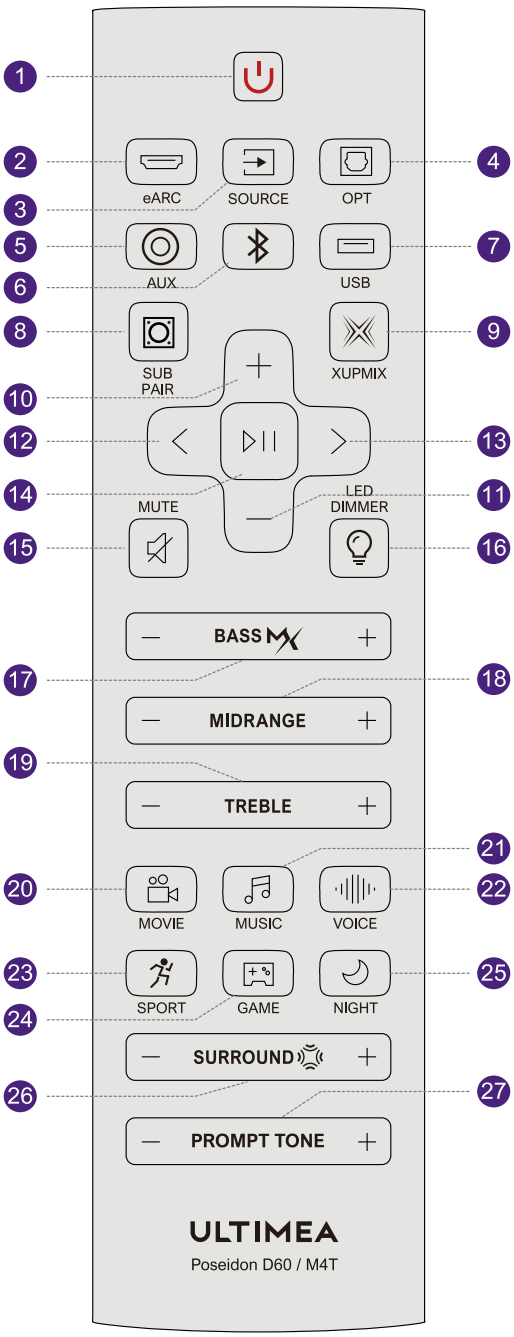

26 “ SURROUND ”: **SURROUND**
Pressione para ajustar o nível do som surround.


27 “ PROMPT TONE ”: **PROMPT TONE**
Pressione para ajustar o nível do tom de aviso, o display mostrará: “Pt 0”, “Pt 1”, “Pt 2”, “Pt 3”.

5 LIGAÇÕES DO PAINEL TRASEIRO

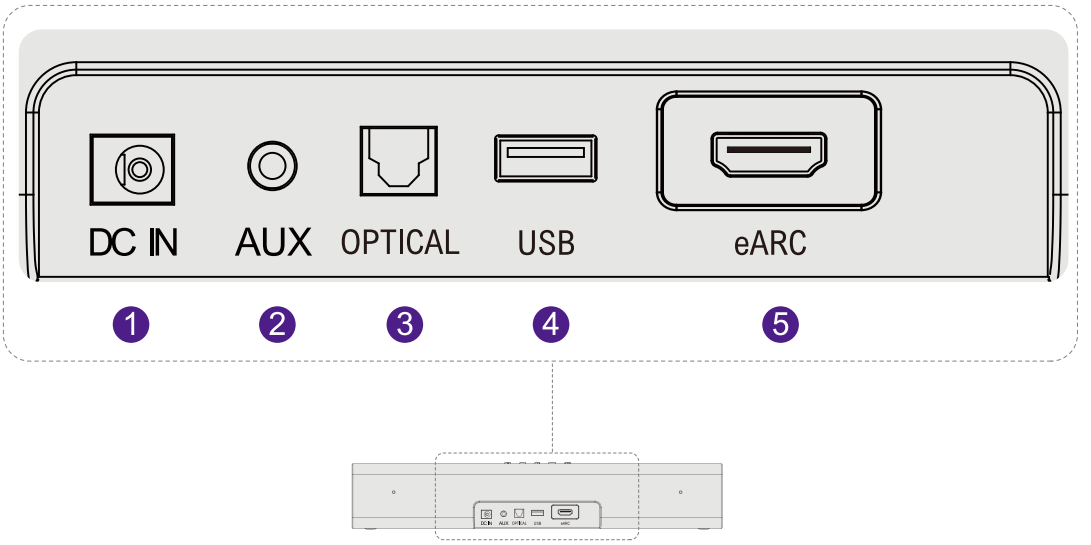


1. **DC IN**
2. **AUX**
3. **OPTICAL**
4. **USB (Suporta MP3 ou FLAC)**
5. **HDMI to TV(eARC)**

6 POSICIONAMENTO DO SISTEMA

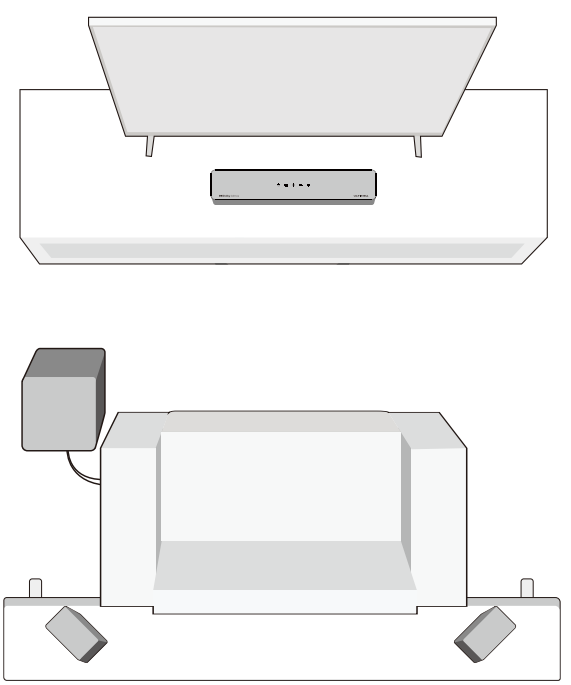

Nota: Coloque a soundbar ao nível dos ouvidos.


7 INSTALAÇÃO NA PAREDE

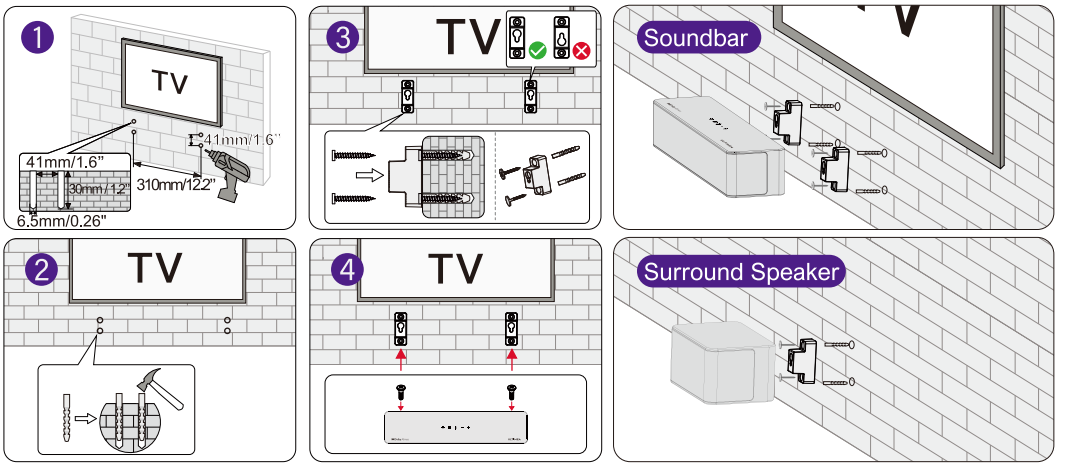


Nota: O suporte de parede usado para as colunas surround é idêntico ao da coluna principal, portanto, o espaçamento vertical dos furos é o mesmo da soundbar e o método de instalação também é o mesmo.

8 CONECTAR E LIGAR

1 Ligue a soundbar à alimentação elétrica.

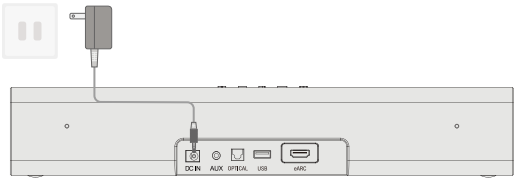


2 Ligue o subwoofer à alimentação elétrica.




3 Conecte o subwoofer e as colunas surround usando o cabo de coluna surround.

As colunas satélite surround no lado direito terão interfaces vermelhas, enquanto as colunas satélite surround no lado esquerdo terão interfaces brancas.

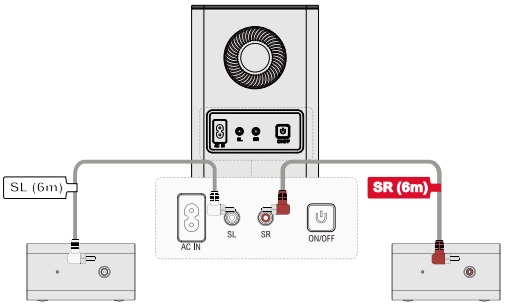

4 Insira as pilhas no controle remoto.


Nota: Pilhas alcalinas recomendadas. Pilhas recarregáveis não recomendadas.




9. CONECTAR À TV VIA HDMI eARC

1. Ligue uma extremidade do cabo HDMI à porta eARC/ARC da TV.

2. Conecte a outra extremidade à porta eARC da soundbar.

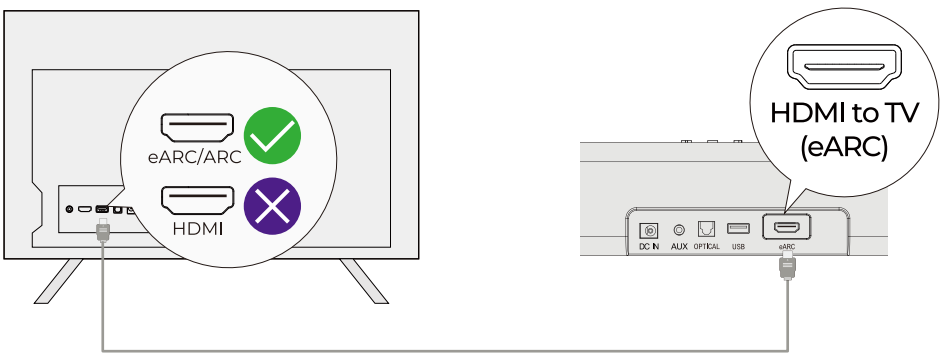

3. Pressione o botão "Source" na Soundbar ou no controle remoto para selecionar a entrada "eARC".

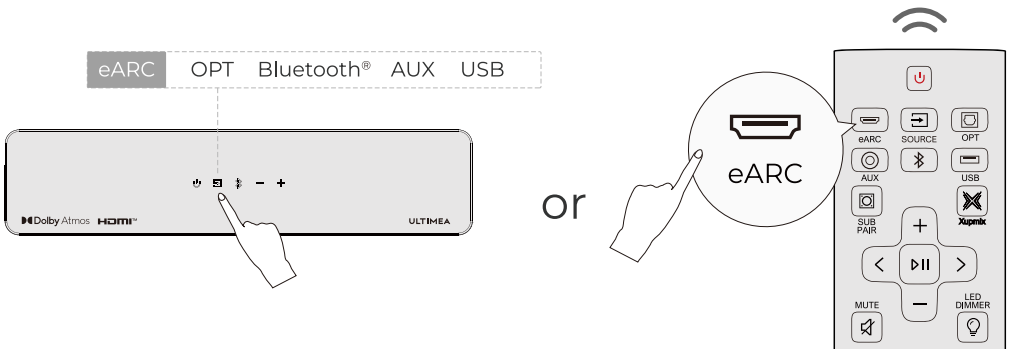

Nota: Certifique-se de que a porta HDMI da sua TV suporta eARC; caso contrário, o sinal de áudio Dolby Atmos não pode ser transmitido.

Dolby Atmos: Se estiver a ver conteúdo em formato Dolby Atmos, defina a saída de áudio da sua TV para «Pass Through».
Definições da TV > Início > Definições > Som > Saída de áudio digital > Pass Through

HDMI eARC (Enhanced Audio Return Channel) é uma versão atualizada do ARC que suporta formatos de áudio de maior qualidade, como Dolby Atmos.


Nota: Ative a função “CEC” na sua TV. Quando o eARC estiver ligado, o seu controlo remoto da TV pode controlar simultaneamente a Soundbar e a TV:

(1) Ligar / Modo de espera

(2) Ajustar volume


10. CONECTAR À TV VIA CABO ÓPTICO

1. Certifique-se de que o seu televisor possui uma porta OPTICAL OUT. Utilize um cabo ótico para ligar a porta OPTICAL OUT do televisor à porta OPTICAL IN da soundbar.

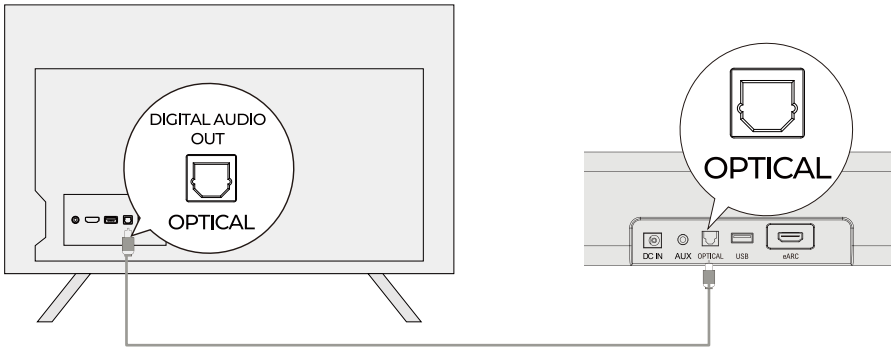

2. Certifique-se de que o conector do cabo ótico está inserido corretamente, conforme ilustrado na figura. Não o insira ao contrário, pois poderá danificar a porta ótica.


3. Definições TV > Home > Som > Saída digital > PCM

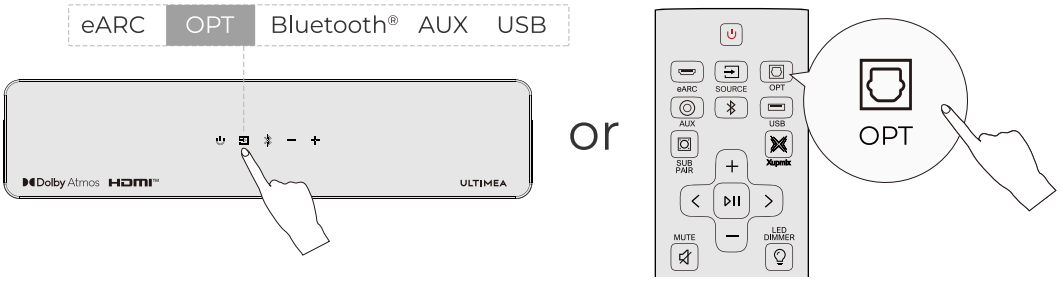

Nota: Se o áudio estiver a ser reproduzido através das colunas internas da TV, silencie a TV ou reduza o volume ao mínimo.


A porta óptica não suporta Dolby Atmos. Para a melhor experiência Dolby Atmos, use HDMI eARC.

11. CONECTAR VIA BLUETOOTH®

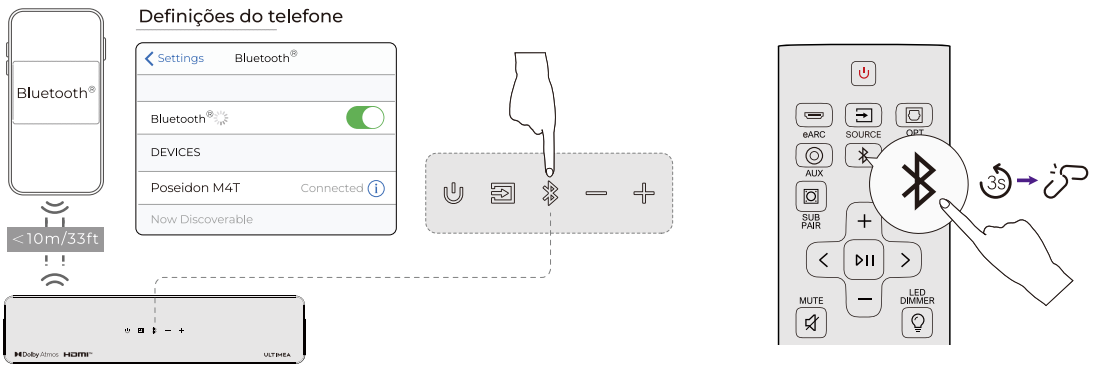

1. Prima o botão “ ” na soundbar ou no controle remoto para entrar no modo de emparelhamento Bluetooth®.
2. Aceda às definições de Bluetooth do seu telemóvel, procure e selecione « Poseidon M4T » para estabelecer ligação à soundbar.
3. Nota: Se a soundbar já estiver no modo Bluetooth e ligada a um dispositivo, prima sem soltar o botão « » durante 3 segundos para desligar o dispositivo atual. Em seguida, selecione manualmente a soundbar no seu telemóvel, PC ou televisor para estabelecer uma nova ligação Bluetooth.

12 REEMPARELHAR O SUBWOOFER

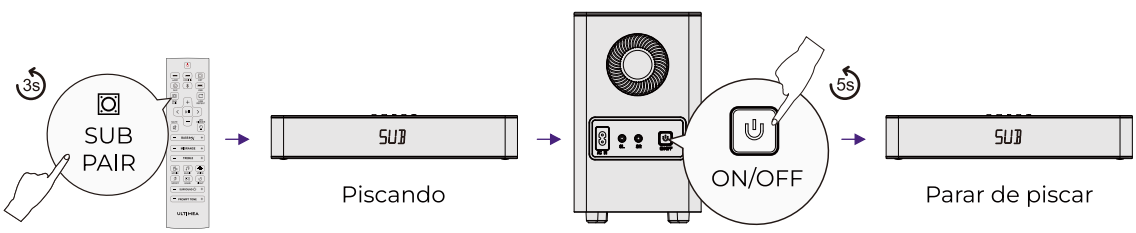


Normalmente, a soundbar e o subwoofer vêm pré-emparelhados.
Se a conexão for perdida, siga os passos abaixo.

1. Mantenha pressionado “SUB PAIR” por 3 segundos.
   O visor piscará “SUB” indicando o modo de emparelhamento.
2. Mantenha pressionado o botão de emparelhamento do subwoofer por 5 segundos.
3. Quando o emparelhamento for bem-sucedido, o visor para de piscar e a luz permanece acesa.

13 RESTAURAR AS CONFIGURAÇÕES DE FÁBRICA

Mantenha pressionado o botão MUTE por 5 segundos para restaurar as configurações de fábrica.

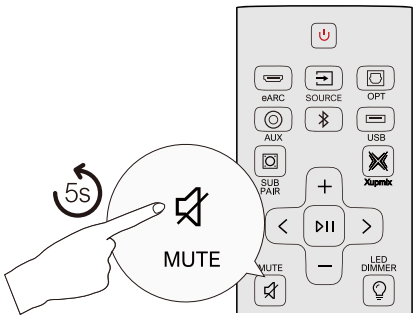


14 AJUSTAR O VOLUME DO SOM DE AVISO


Download Ultimea App

Available on the App Store

GET IT ON Google Play

ULTIMEA



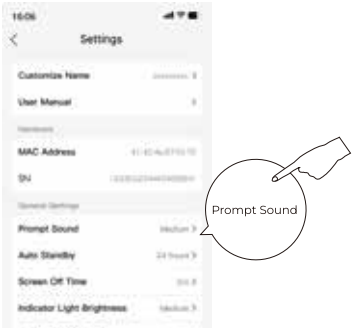

Se o som de aviso estiver muito alto, ajuste-o pelo app ULTIMEA.

1. Digitalize o código QR para baixar o app ULTIMEA e adicionar a soundbar.
2. Abra os detalhes do dispositivo, toque em Configurações e selecione “Prompt Sound ” para ajustar.

15 ESPECIFICAÇÕES TÉCNICAS

Model Number	U2522
Power Supply	DC 18V 3A (Soundbar) / AC 100~240V (Subwoofer)
Soundbar Drivers	Soundbar: 2.25" × 3, Surround: 2.25" × 2, Subwoofer: 5.25"
Auto Standby	The soundbar will turn to standby mode if there is no audio signal for 15 minutes. You can set the standby time in the App
Standby Power	<0.5W
Operating Temperature	-10°C – 40°C / 14°F – 104°F
Bluetooth® Version	5.3

Soundbar	400 x 70x 90 mm/15.7" x 2.8" x 3.5"
Subwoofer	155x244x215mm/6.1"x9.6"×8.5"
Surround	135x70x90mm/5.3"x2.8"x3.5"
Packaging	328x440x190mm/12.9"×17.3" x 7.5"
Packaging Weight	6.35 kg /14 lbs

USB Output	5V 500mA
Operating Altitude	2000 meters above sea level
Wall Mount Screw	4 × 32 mm / 0.16" × 1.26"
Bracket Screws Diameter	3 mm / 0.12"
Remote Control Battery Type	2 × AAA (NOT INCLUDED)
Notice: Risk of fire or explosion if the battery is replaced by an incorrect type.	

PROPER DISPOSAL INSTRUCTIONS



This mark shown on the product or its packaging, indicates that this product should not be disposed of with other household waste at the end of its working life. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources.

For indoor use only



This symbol indicates that the product is intended for indoor use only.

Class II equipment



This symbol indicates that the product is Class II equipment.

Waste Electrical & Electronic Equipment

Household user should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take this item for environmentally safe recycling.

Business users should contact their suppliers and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.

WIRELESS FREQUENCY RANGE AND WIRELESS OUTPUT POWER:

Frequency: 2.402GHz-2.48GHz

The Max. transmit power (Applies only to the EU): 10 dBm

FCC REGULATORY COMPLIANCE

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

(1) This device may not cause harmful interference.

(2) This device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

ISED WARNINGS

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

(1) This device may not cause interference.

(2) This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux
CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence.

L'exploitation est autorisée aux deux conditions suivantes :

1) L'appareil ne doit pas produire de brouillage;

2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

3) The device meets the exemption from the routine evaluation limits in issue6 of RSS 102 and compliance with RSS-102 RF exposure, users can obtain Canadian information on RF exposure and compliance.

Le dispositif rencontre l'exemption des limites courantes d'évaluation dans la numéro 6 de RSS 102 etla conformité à l'exposition de RSS-102 rf, utilisateurs peut obtenir l'information canadienne surl'exposition et la conformité de rf.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.

Cet émetteur ne doit pas être Co-placé ou ne fonctionnant en même temps qu'aucune autre antenne ouémetteur. Cet équipement devrait être installé et actionné avec une distance minimum de 20 centimètres entre le radiateur et votre corps.

Wireless Capability Description:

The subwoofer is equipped with a wireless signal reception module, enabling it to receive audio signals from the main device for playback. This device only supports wireless signal reception and cannot relay or forward signals.

The two surround speakers in the system are designed for wired connection and do not have the ability to transmit or receive wireless signals.

The remote control uses infrared (IR) technology for device control and does not support any other wireless signal transmission or reception capabilities.

⚠ **CA WARNING:** Can expose you to BPA, a carcinogen, and BPA, a reproductive. toxicant. See www.P65Warnings.ca.gov.

CE WARNINGS

1) Do not install this equipment in a confined or building-in space such as a book case or similar unit, and remain a well ventilation conditions. The ventilation should not be impeded by covering the ventilation openings with items such as newspaper, table-cloths, curtains etc.

2) WARNING: To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture. The apparatus shall not be exposed to dripping or splashing and that objects filled with liquids, such as vases, shall not be placed on apparatus.

3) WARNING: The adapter plug is used as disconnect device, the disconnect device shall remain readily operable.

4) Frequency: 2.402GHz-2.48GHz

5) The Max. transmit power: 10 dBm

EU Declaration of Conformity

We (Manufacturer is responsible for this declaration)
Ultimea Technology (Shenzhen) Limited
(Company name)

9th Floor, Building A, Shenzhen Industrial Software Park, Bantian Street, Longgang District, Shenzhen, China 518000
(Company address)

Declare under our sole responsibility that the product
Trade Mark: ULTIMEA
Product Name: Poseidon M4T 5.1 Channel Dolby Atmos Soundbar
Model No.: U2522

The product to which this declaration relates is in conformity with the essential requirements set out in the Council Directive on the Approximation of the laws of the Member States relating to the Radio Equipment Directive (2014/53/EU), the Restriction of Hazardous Substances Directive (2011/65/EU), the Electromagnetic Compatibility Directive (2014/30/EU), and the Low Voltage Directive (2014/35/EU). The product is responsible for affixing the CE marking, and the following standards were applied:

EN 55032:2015/A1:2020

EN 55035:2017/A11:2020

EN IEC 61000-3-2:2019/A1:2021

EN 61000-3-3:2013/A2:2021

ETSI EN 301 489-1 V2.2.3 (2019-11)

ETSI EN 301 489-17 V3.3.1 (2024-09)

ETSI EN 300 328 V2.2.2 (2019-07)

EN 50663: 2017

EN IEC 62368-1:2020+A11:2020

IEC 62321-3-1:2013

IEC 62321-4:2013+A1:2017

IEC 62321-5:2013

IEC 62321-6:2015

IEC 62321-7-1:2015

IEC 62321-7-2:2017

IEC 62321-8:2017

Full Name: Yoyo.Yu
Position: Approbation Manager

Signature: yoyo yu

Place/Date: Shenzhen, China / Sep. 13-2024

Trade Marks:

Dolby, Dolby Atmos, and the double-D symbol are registered trademarks of Dolby Laboratories Licensing Corporation. Manufactured under license from Dolby Laboratories. Confidential unpublished works. Copyright © 2012–2024 Dolby Laboratories. All rights reserved.

HDMI™
HIGH-DEFINITION MULTIMEDIA INTERFACE

The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

Bluetooth®

The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Ultimea Technology (Shenzhen) Limited. is under license. Other trademarks and trade names are those of their respective owners.

General specification (English):

Model: U2522
Sound system: 5.1 channel
Power supply: 18V 3A DC(Soundbar);
100-240V~50/60Hz AC (Subwoofer)
Drivers: 2.25"×3(Soundbar) + 2.25"×2 (Surround)
+5.25"(Subwoofer)
Standby Power: <0.5W
USB Output: 5V 500mA DC
Operating Temperature: -10°C-40°C/14°F-104°F
Operating Altitude: 2000 meters above sea level
Wall Mount Screw: 4 × 32 mm / 0.16" × 1.26"
Bracket Screws Diameter: 3 mm / 0.12"
Remote Control Battery Type: 2 x AAA (NOT INCLUDED)
Notice: Risk of fire or explosion if the battery is replaced by an incorrect type.

Dimensions

・Soundbar dimensions (W x H x D):
400 x 70 x 90 mm / 15.7" x 2.8" x 3.5"
・Subwoofer dimensions (W x H x D):
155 x 244 x 215 mm / 6.1" x 9.6" x 8.5"
・Surround dimensions (W x H x D):
135 x 70 x 90 mm / 5.3" x 2.8" x 3.5"
・Packaging dimensions (W x H x D):
328 x 440 x 190 mm / 12.9" x 17.3" x 7.5"
・Packaging Weight: 6.35 kg / 14 lbs

Power Consumption and Wireless Connection Setup Guide

1. Information on power consumption
This equipment complies with European COMMISSION REGULATION (EU) 2023/826.
・Off: N/A
・Standby (when all wireless connections are deactivated): < 0.5 W
・Networked standby for Soundbar: < 2.0 W
*The duration for the device to enter standby mode can be set in the app. Changing this setting may lead to a significant increase in energy consumption, negatively impacting the environment.
2. The period of time after which the power management function switches the equipment automatically into:

Off	N/A	
Standby	When the soundbar is idle (with no playback or operation) and neither Bluetooth® nor the app is connected.	Switched to standby mode after 15 minutes.
Networked standby	When Bluetooth® or the app is connected.	Switched to networked standby mode after 15 minutes of inactivity in operational mode.

3. If this equipment has the wireless network connections:
How to activate wireless network connections:
・Set up the equipment properly;
・Switch into wireless mode (Bluetooth®);
・Connect with energy using products (e.g. players/ game consoles/ STB (Set-Top Boxes)/ phones/ tablets /PCs). How to deactivate wireless network connections: ・Switch to another channel besides Bluetooth®;
・Then long press on the remote control for more than 3 seconds.

For other languages of the above content
(DE, FR, ES, IT, PT, NL, PL, SV, TR, JP, CN, TC, KO, ID, TH, AR),
please scan the QR code

IMPORTANT SAFETY INSTRUCTIONS (English):

1.Please read and retain this manual. Follow all warnings and operate according to the instructions.
2.Do not use the device near water sources, in damp environments, or in the rain. Avoid splashing liquids or placing objects containing liquids (such as vases) on the device.
3.Clean only with a dry cloth. Do not use liquid cleaners.
4.Do not block ventilation openings or install the device in an enclosed space. Ensure proper ventilation and install according to the manufacturer's instructions.
5.Do not install the device near heat sources such as radiators, stoves, or amplifiers. Do not cover the ventilation openings with items such as newspapers or curtains.
6.Use only attachments, stands, or accessories specified by the manufacturer. When using a device with wheels, move with care to avoid tipping.
7.Protect the power cord from being pinched, stepped on, or bent, especially at plugs, outlets, and the point where it exits the device.
8.Do not alter the polarized or grounding-type plug. If the plug does not fit into the outlet, consult an electrician to replace the outlet.
9.Unplug the device during lightning storms or when unused for long periods. To fully disconnect power, unplug the device from the wall outlet and ensure the plug is accessible.
10.Do not place any open flame sources (such as lit candles) on or near the device.
11.Do not attempt to open the device. High voltage inside may be fatal. There are no user-serviceable parts inside. All servicing must be performed by qualified personnel.
12.The installation height of the device must not exceed 2 meters.

Scan QR for safety info / QR-Code für Infos scannen / Scanner le QR pour infos / Escanee QR para info / Scansiona il QR per info / Leia o QR para info / Scan QR-code voor info / Zeskanuj kod QR / Skanna QR för info / QR kodu tara / QRコードをスキャン / 扫码查看安全信息 / 掃碼查看安全資訊 / QR 코드 스캔 / Pindai QR untuk informasi keselamatan / สแกน QR เพื่อดูข้อมูลความปลอดภัย / امسح رمز QR لمعلومات السلامة

ULTIMEA

Product Name: Poseidon M4T 5.1 Channel Dolby Atmos Soundbar
Model No.: U2522
HVIN: U2522

EC REP

Ultimea GmbH
Buchenring 57, 22359 Hamburg, Germany

UK REP

EVATOST CONSULTING LTD
Office 101 32 Threadneedle Street, London,
United Kingdom, EC2R 8AY

© Ultimea Inc. All rights reserved, registered in the United States and other countries.
801 S. Dupont Ave., Ste G, Ontario, CA, 91761, USA

Made in China
Manufacturer: Ultimea Technology (Shenzhen) Limited
Address: 9th Floor, Building A, Shenzhen Industrial Software Park, Bantian Street, Longgang District, Shenzhen, China 518000

Manufacturer Contact Information:

+1 888-598-8875 (US)
Mon-Fri 9am-5pm (PST)

+49 89-628-25828 (EU)
Mon-Fri 9am-5pm (CET)

support@ultimea.com

support.ultimea.com

If you need our support, kindly reach out to our service team.
We are always glad to help.

Download Ultimea App

GET IT ON Google Play

Available on the App Store

ULTIMEA

Search for “ULTIMEA” on social media.

RoHS

FR
Cet appareil, ses accessoires, et cordons se recyclent
REPRISE À LA LIVRAISON
OU
À DÉPOSER EN MAGASIN
OU
À DÉPOSER EN DÉCHETERIE
Points de collecte sur www.uefairedemesdechets.fr

Warranty Extension Plan

Regardless of where you purchased your Ultimea product, you can easily opt for this extended warranty.
Scan to check out our extended warranty options.